


Service Manual

High Definition Hospitality Plasma Display

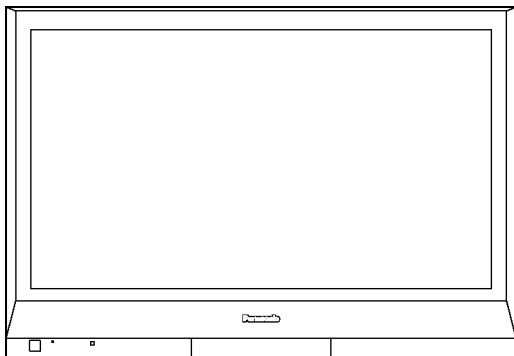

TH-37PR9U

TH-42PR9U

GPH9D Chassis

Specifications

Power Source	120 V AC, 50/60Hz	
Power Consumption		
Power on	300 W (37 inch)	345 W (42 inch)
Stand-by condition	Save OFF 0.6 W, Save ON 0.4 W (37 inch)	Save OFF 0.6 W, Save ON 0.4 W (42 inch)
Power off condition	0.1 W (37 inch)	0.1 W (42 inch)
Plasma Display panel		
	Drive method: AC type 37-inch, 16:9 aspect ratio (37 inch)	Drive method: AC type 42-inch, 16:9 aspect ratio (42 inch)
Contrast Ratio	Max 10000:1	
Screen size	32.2" (818 mm) (W) × 18.1" (461 mm) (H) × 37" (939 mm) (diagonal) (37 inch)	
	36.2" (920 mm) (W) × 20.4" (518 mm) (H) × 42" (1,056 mm) (diagonal) (42 inch)	
(No. of pixels)	737,280 (1,024 (W) × 720(H)) (37 inch) [3,072 × 720 dots] (37 inch)	786,432 (1,024 (W) × 768(H)) (42 inch) [3,072 × 768 dots] (42 inch)
Operating condition		
Temperature	32 °F - 104 °F (0 °C - 40 °C)	
Humidity	20% - 80%	
Applicable signals		
Scanning format	525 (480) / 60i • 60p, 625 (575) / 50i • 50p, 750 (720) / 60p • 50p, 1125 (1080) / 60i • 50i • 24p • 25p • 30p • 24sF.... SMPTE274M, 1250 (1080) / 50i	
PC signals	VGA, SVGA, XGA, SXGA, UXGA..... (compressed) (37 inch) Horizontal scanning frequency 15 - 110 kHz (37 inch) Vertical scanning frequency 48 - 120 Hz (37 inch)	VGA, SVGA, XGA, SXGA, UXGA..... (compressed) (42 inch) Horizontal scanning frequency 15 - 110 kHz (42 inch) Vertical scanning frequency 48 - 120 Hz (42 inch)
Connection terminals		
PC	(HIGH-DENSITY Mini-D-SUB 15PIN)	R,G,B / 0.7 Vp-p (75-ohm) HD,VD / 1.0-5.0 Vp-p (high impedance)
		Component Y:1.0 Vp-p (75-ohm: include sync) P _B / C _B :0.7 Vp-p (75-ohm)

AUDIO IN (M3 JACK)

0.5 Vrms (high impedance)

SERIAL

EXTERNAL CONTROL TERMINAL (D-SUB 9PIN) RS-232C COMPATIBLE

Accessories Supplied

Fixing bands (TMME203 or TMME187) × 2

Dimensions (W × H × D)36.1" (917 mm) × 25.4" (644 mm) × 3.7" (95 mm) 40.2" (1,020 mm) × 27.8" (705 mm) × 4.3" (109 mm)
(37 inch) (42 inch)

(exclusive of protruding portion) (37 inch) (exclusive of protruding portion) (42 inch)

Mass (weight)

approx. 57.3 lbs (37 inch) approx. 66.1 lbs (42 inch)

Sound

Speaker (8Ω) 20W [10W+10W] (10%THD)

Notes:

- Design and specifications are subject to change without notice. Mass and dimensions shown are approximate.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

CONTENTS

	Page		Page
1 Applicable signals	4	7.5. Removal of the PB-Board	19
2 Safety Precautions	5	7.6. Removal of the DA-Board	19
2.1. General Guidelines	5	7.7. Removal of the P-Board	19
3 Prevention of Electro Static Discharge (ESD) to		7.8. Removal of the D-Board	20
Electrostatically Sensitive (ES) Devices	6	7.9. Removal of the SU-Board and the SD-Board	20
4 About lead free solder (PbF)	7	7.10. Removal of the SC-Board	20
5 Service Hint	8	7.11. Removal of the SS-Board	21
6 Disassembly TH-37PR9U	9	7.12. Removal of the C1, C2-Board	21
6.1. Removal of the Back Cover	9	7.13. Removal of the S-Board	21
6.2. Removal of the Slot Block	9	7.14. Removal of the GK-Board	22
6.3. Removal of the J-Board	9	7.15. Removal of the K-Board	22
6.4. Removal of the HX-Board	9	7.16. Removal of the Fan	22
6.5. Removal of the PB-Board	10	7.17. Removal of the Escutcheon	23
6.6. Removal of the DA-Board	10	7.18. Removal of the Plasma Panel	24
6.7. Removal of the P-Board	11	8 Location of Lead Wiring	27
6.8. Removal of the D-Board	11	8.1. Wiring for the 37 inch model	27
6.9. Removal of the SU-Board and the SD-Board	11	8.2. Wiring for the 42 inch model	31
6.10. Removal of the SC-Board	12	9 Adjustment Procedure	35
6.11. Removal of the SS-Board	12	9.1. Driver Set-up	35
6.12. Removal of the C1, C2-Board	12	9.2. Initialization Pulse Adjust	36
6.13. Removal of the S-Board	13	9.3. P.C.B. (Printed Circuit Board) exchange	36
6.14. Removal of the GK-Board	13	9.4. Adjustment Volume Location	37
6.15. Removal of the K-Board	13	9.5. Test Point Location	38
6.16. Removal of the Fan	14	10 Service mode	39
6.17. Removal of the Escutcheon	14	10.1. CAT (computer Aided Test) mode	39
6.18. Removal of the Plasma Panel	16	10.2. IIC mode structure (following items value is sample data.)	
7 Disassembly TH-42PR9U	18	42
7.1. Removal of the Back Cover	18	11 Adjustment	43
7.2. Removal of the Slot Block	18	11.1. RGB white balance adjustment	43
7.3. Removal of the J-Board	18	11.2. HD white balance adjustment	45
7.4. Removal of the HX-Board	18	11.3. Power control adjustment	47

12 Trouble shooting guide	48	15.25. J-Board (3 of 5) Schematic Diagram	107
12.1. Self Check	48	15.26. J-Board (4 of 5) Schematic Diagram	108
12.2. No Power	50	15.27. J-Board (5 of 5) Schematic Diagram	109
12.3. No Picture	50	15.28. DA-Board (1 of 2) Block Diagram	110
12.4. Local screen failure	51	15.29. DA-Board (2 of 2) Block Diagram	111
13 Option Setting	52	15.30. DA-Board (1 of 6) Schematic Diagram	112
14 Conduct Views	55	15.31. DA-Board (2 of 6) Schematic Diagram	113
14.1. P-Board (37inch)	55	15.32. DA-Board (3 of 6) Schematic Diagram	114
14.2. P-Board (42inch)	58	15.33. DA-Board (4 of 6) Schematic Diagram	115
14.3. PB-Board	61	15.34. DA-Board (5 of 6) Schematic Diagram	116
14.4. HX-Board	62	15.35. DA-Board (6 of 6) Schematic Diagram	117
14.5. GK, K and S-Board	63	15.36. D-Board Block Diagram	118
14.6. J-Board	64	15.37. D-Board (1 of 6) Schematic Diagram	119
14.7. DA-Board	66	15.38. D-Board (2 of 6) Schematic Diagram	120
14.8. D-Board	68	15.39. D-Board (3 of 6) Schematic Diagram	121
14.9. C1-Board (37inch)	70	15.40. D-Board (4 of 6) Schematic Diagram	122
14.10. C1-Board (42inch)	71	15.41. D-Board (5 of 6) Schematic Diagram	123
14.11. C2-Board (37inch)	72	15.42. D-Board (6 of 6) Schematic Diagram	124
14.12. C2-Board (42inch)	73	15.43. C1 and C2-Board Block Diagram	125
14.13. SC-Board	74	15.44. C1-Board (1 of 2) Schematic Diagram (37inch)	126
14.14. SU-Board (37inch)	77	15.45. C1-Board (2 of 2) Schematic Diagram (37inch)	127
14.15. SU-Board (42inch)	78	15.46. C1-Board (1 of 2) Schematic Diagram (42inch)	128
14.16. SD-Board (37inch)	79	15.47. C1-Board (2 of 2) Schematic Diagram (42inch)	129
14.17. SD-Board (42inch)	80	15.48. C2-Board (1 of 2) Schematic Diagram (37inch)	130
14.18. SS-Board	81	15.49. C2-Board (2 of 2) Schematic Diagram (37inch)	131
15 Block and Schematic Diagram	83	15.50. C2-Board (1 of 2) Schematic Diagram (42inch)	132
15.1. Schematic Diagram Notes	83	15.51. C2-Board (2 of 2) Schematic Diagram (42inch)	133
15.2. Main Block Diagram (37inch)	84	15.52. SC, SU and SD-Board Block Diagram (37inch)	134
15.3. Main Block Diagram (42 inch)	85	15.53. SC, SU and SD-Board Block Diagram (42inch)	135
15.4. P-Board Block Diagram (37inch)	86	15.54. SC-Board (1 of 2) Schematic Diagram	136
15.5. P-Board (1 of 6) Schematic Diagram (37inch)	87	15.55. SC-Board (2 of 2) Schematic Diagram	137
15.6. P-Board (2 of 6) Schematic Diagram (37inch)	88	15.56. SU-Board (1 of 2) Schematic Diagram (37inch)	138
15.7. P-Board (3 of 6) Schematic Diagram (37inch)	89	15.57. SU-Board (2 of 2) Schematic Diagram (37inch)	139
15.8. P-Board (4 of 6) Schematic Diagram (37inch)	90	15.58. SU-Board (1 of 2) Schematic Diagram (42inch)	140
15.9. P-Board (5 of 6) Schematic Diagram (37inch)	91	15.59. SU-Board (2 of 2) Schematic Diagram (42inch)	141
15.10. P-Board (6 of 6) Schematic Diagram (37inch)	92	15.60. SD-Board (1 of 2) Schematic Diagram (37inch)	142
15.11. P-Board Block Diagram (42inch)	93	15.61. SD-Board (2 of 2) Schematic Diagram (37inch)	143
15.12. P-Board (1 of 6) Schematic Diagram (42inch)	94	15.62. SD-Board (1 of 2) Schematic Diagram (42inch)	144
15.13. P-Board (2 of 6) Schematic Diagram (42inch)	95	15.63. SD-Board (2 of 2) Schematic Diagram (42inch)	145
15.14. P-Board (3 of 6) Schematic Diagram (42inch)	96	15.64. SS and S-Board Block Diagram	146
15.15. P-Board (4 of 6) Schematic Diagram (42inch)	97	15.65. SS and S-Board Schematic Diagram	147
15.16. P-Board (5 of 6) Schematic Diagram (42inch)	98	16 Parts Location	149
15.17. P-Board (6 of 6) Schematic Diagram (42inch)	99	16.1. Exploded View	149
15.18. PB-Board Block and Schematic Diagram	100	16.2. Cable relation	152
15.19. HX-Board Block and Schematic Diagram	101	16.3. Accessories Box	153
15.20. GK and K-Board Block and Schematic Diagram	102	17 Mechanical Replacement Parts List	154
15.21. J-Board (1 of 2) Block Diagram	103	18 Replacement Parts List	155
15.22. J-Board (2 of 2) Block Diagram	104	18.1. Relpacement Parts List Notes	155
15.23. J-Board (1 of 5) Schematic Diagram	105	18.2. TH-37PR9U Electrical Replacement Parts List	156
15.24. J-Board (2 of 5) Schematic Diagram	106	18.3. TH-42PR9U Electrical Replacement Parts List	177

1 Applicable signals

Applicable input signals for Mini D-sub 15P (Component) / Mini D-sub 15P (RGB) (* Mark)

	Signal name	Horizontal frequency (kHz)	Vertical frequency (Hz)	Mini D-sub 15P (Component)	Mini D-sub 15P (RGB)
1	525 (480) / 60i	15.73	59.94	*	*
2	525 (480) / 60p	31.47	59.94	*	*1
3	625 (575) / 50i	15.63	50.00	*	*
4	625 (575) / 50p	31.25	50.00	*	*
5	750 (720) / 60p	45.00	60.00	*	*
6	750 (720) / 50p	37.50	50.00	*	*
7	1,125 (1,080) / 60i	33.75	60.00	*	*
8	1,125 (1,080) / 50i	28.13	50.00	*	*
9	1,125 (1,080) / 24p	27.00	24.00	*	*
10	1,125 (1,080) / 24sF	27.00	47.92	*	*
11	1,125 (1,080) / 25p	28.13	25.00	*	*
12	1,125 (1,080) / 30p	33.75	30.00	*	*
13	1,250 (1,080) / 50i	31.25	50.00	*	*
14	640 × 400 @70 Hz	31.46	70.07		*
15	640 × 480 @60 Hz	31.47	59.94		*2
16	640 × 480 @72 Hz	37.86	72.81		*
17	640 × 480 @75 Hz	37.50	75.00		*
18	640 × 480 @85 Hz	43.27	85.01		*
19	852 × 480 @60 Hz	31.47	59.94		*2
20	800 × 600 @56 Hz	35.16	56.25		*
21	800 × 600 @60 Hz	37.88	60.32		*
22	800 × 600 @72 Hz	48.08	72.19		*
23	800 × 600 @75 Hz	46.88	75.00		*
24	800 × 600 @85 Hz	53.67	85.06		*
25	1,024 × 768 @60 Hz	48.36	60.00		*
26	1,024 × 768 @70 Hz	56.48	70.07		*
27	1,024 × 768 @75 Hz	60.02	75.03		*
28	1,024 × 768 @85 Hz	68.68	85.00		*
29	1,152 × 864 @75 Hz	67.50	75.00		*
30	1,280 × 960 @60 Hz	60.00	60.00		*
31	1,280 × 960 @85 Hz	85.94	85.00		*
32	1,280 × 1,024 @60 Hz	63.98	60.02		*
33	1,280 × 1,024 @75 Hz	79.98	75.03		*
34	1,280 × 1,024 @85 Hz	91.15	85.02		*
35	1,600 × 1,200 @60 Hz	75.00	60.00		*
36	1,600 × 1,200 @65 Hz	81.25	65.00		*
37	1,066 × 600 @60 Hz	37.88	60.32		*
38	1,366 × 768 @60 Hz	48.36	60.00		*
39	Macintosh13" (640 × 480)	35.00	66.67		*
40	Macintosh16" (832 × 624)	49.72	74.54		*
41	Macintosh21" (1,152 × 870)	68.68	75.06		*

*1: When selected the RGB format and 525p signal input to the Mini D-sub 15P terminal, it is recognized as VGA 60Hz signal.

*2: When inputted VGA 60Hz format signal from the other than Mini D-sub 15P terminal, it is recognized as 525p signal.

Note: Signals without above specification may not be displayed properly.

2 Safety Precautions

2.1. General Guidelines

1. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
2. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
3. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.

2.1.1. Leakage Current Cold Check

1. Unplug the AC cord and connect a jumper between the two prongs on the plug.
2. Measure the resistance value, with an ohmmeter, between the jumpered AC plug and each exposed metallic cabinet part on the equipment such as screw heads, connectors, control shafts, etc. When the exposed metallic part has a return path to the chassis, the reading should be between $1M\Omega$ and $5.2M\Omega$.

When the exposed metal does not have a return path to the chassis, the reading must be ∞ .

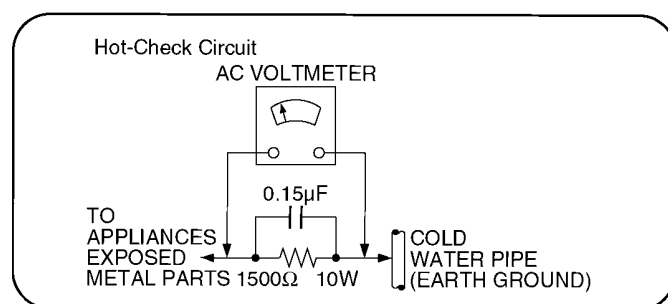


Figure 1

2.1.2. Leakage Current Hot Check (See Figure 1.)

1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
2. Connect a 1.5kΩ, 10 watts resistor, in parallel with a 0.15µF capacitors, between each exposed metallic part on the set and a good earth ground such as a water pipe, as shown in Figure 1.
3. Use an AC voltmeter, with 1000 ohms/volt or more sensitivity, to measure the potential across the resistor.
4. Check each exposed metallic part, and measure the voltage at each point.
5. Reverse the AC plug in the AC outlet and repeat each of the above measurements.
6. The potential at any point should not exceed 0.75 volts RMS. A leakage current tester (Simpson Model 229 or equivalent) may be used to make the hot checks, leakage current must not exceed 1/2 milliamp. In case a measurement is outside of the limits specified, there is a possibility of a shock hazard, and the equipment should be repaired and rechecked before it is returned to the customer.

3 Prevention of Electro Static Discharge (ESD) to Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by electro static discharge (ESD).


1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static solder removal device. Some solder removal devices not classified as "anti-static (ESD protected)" can generate electrical charge sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

Caution

Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device).

IMPORTANT SAFETY NOTICE

There are special components used in this equipment which are important for safety. These parts are marked by  in the schematic diagrams, Exploded Views and replacement parts list. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire, or other hazards. Do not modify the original design without permission of manufacturer.

4 About lead free solder (PbF)

Note: Lead is listed as (Pb) in the periodic table of elements.

In the information below, Pb will refer to Lead solder, and PbF will refer to Lead Free Solder.

The Lead Free Solder used in our manufacturing process and discussed below is (Sn+Ag+Cu).

That is Tin (Sn), Silver (Ag) and Copper (Cu) although other types are available.

This model uses Pb Free solder in it's manufacture due to environmental conservation issues. For service and repair work, we'd suggest the use of Pb free solder as well, although Pb solder may be used.


PCBs manufactured using lead free solder will have the PbF within a leaf Symbol  stamped on the back of PCB.

Caution

- Pb free solder has a higher melting point than standard solder. Typically the melting point is 50 ~ 70 °F (30~40 °C) higher. Please use a high temperature soldering iron and set it to 700 ± 20 °F (370 ± 10 °C).
- Pb free solder will tend to splash when heated too high (about 1100 °F or 600 °C).




If you must use Pb solder, please completely remove all of the Pb free solder on the pins or solder area before applying Pb solder. If this is not practical, be sure to heat the Pb free solder until it melts, before applying Pb solder.

- After applying PbF solder to double layered boards, please check the component side for excess solder which may flow onto the opposite side. (see figure below)

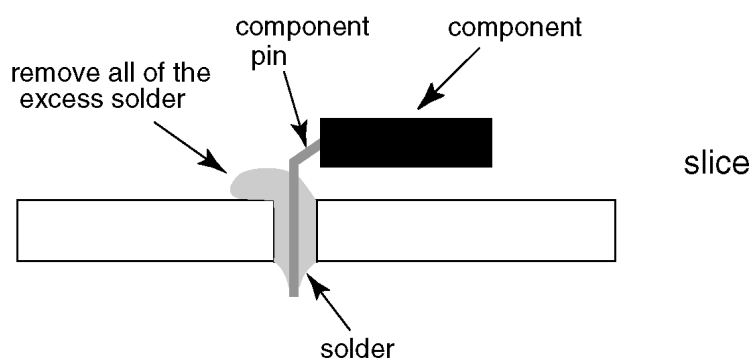

Suggested Pb free solder

There are several kinds of Pb free solder available for purchase. This product uses Sn+Ag+Cu (tin, silver, copper) solder. However, Sn+Cu (tin, copper), Sn+Zn+Bi (tin, zinc, bismuth) solder can also be used.

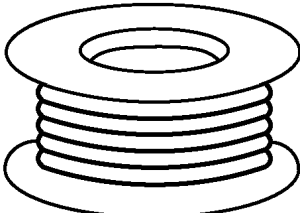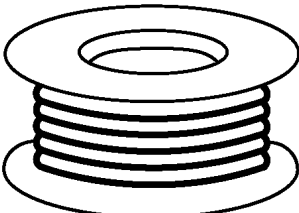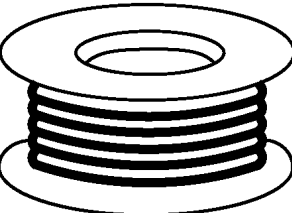
0.3mm X 100g	0.6mm X 100g	1.0mm X 100g
		

5 Service Hint

Note:

- The remote control transmitter is not included with this set.
- Execute by the following remote control transmitter when repairing.
product number : EUR7636070R


Remove the Back Cover

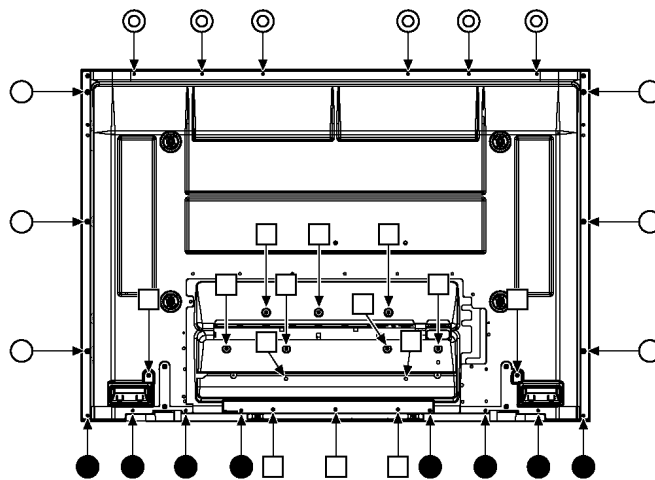

Remove :

- 14 screws (□) THEL0429
- 6 screws (○) XYN4+F30FJK
- 6 screws (◎) XYN4+F10FJK
- 8 screws (●) XTB4+12GFJK

P.C.Boards Location

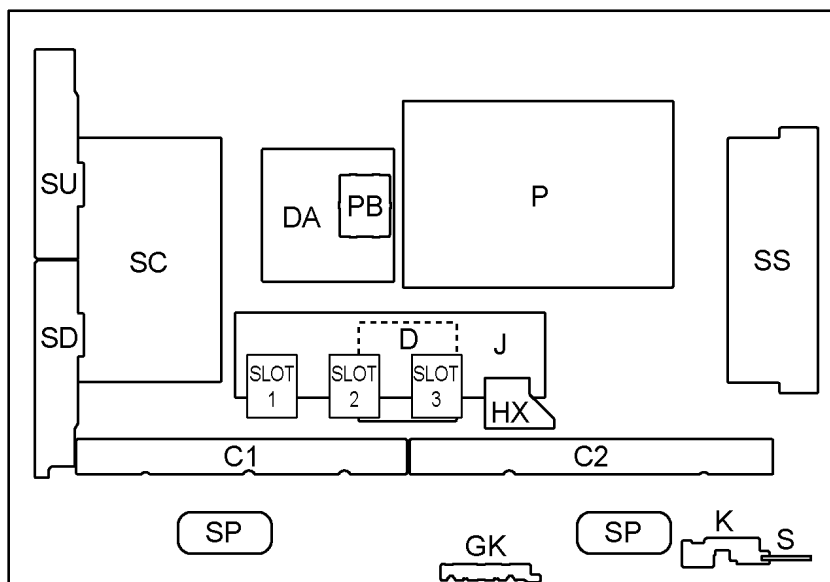

Board Name	Function	Board Name	Function
DA	Digital Signal Processor, Micon	C1	Data Drive (Right)
D	Format Converter, Plasma AI Processor Sub-Field Processor	C2	Data Drive (Left)
J	Slot Interface (Audio/Video/Sync input Switch), SYNC processor, Sound processor,	SP	Speaker terminal
SS	Sustain drive	S	Power switch
SC	Scan drive	K	Remote receiver, LED_G,R
SU	Scan out (Upper)	GK	Key switch
SD	Scan out (Lower)	P	Power supply
		PB	Fan control
		HX	PC / RS-232C Input terminal

Note:


- Extension cable kit Slot Board is supplied as service fixtures and tools.
(Parts No. TZSC0704)

6 Disassembly TH-37PR9U

- To disassemble P.C.B., wait for 1 minute after power was off for discharge from electrolysis capacitors.
- ▲ and △ marks indicate screw positions.


6.1. Removal of the Back Cover

1. Remove the screws (×6 ○, ×6 ◎, ×14 □, ×8 ●) and then remove the Back Cover.

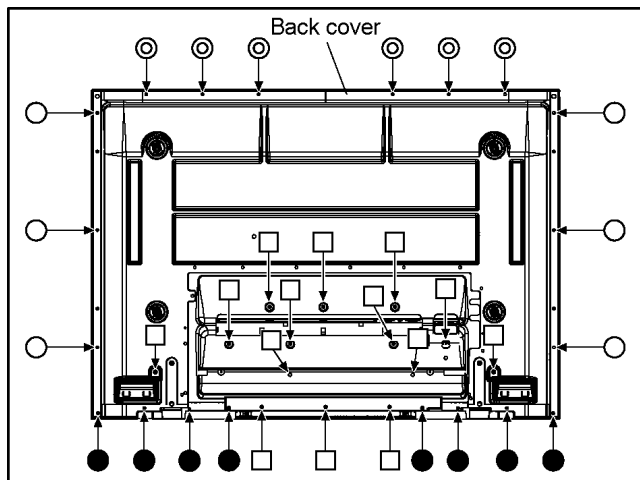


6.2. Removal of the Slot Block

1. Disconnect the couplers(J1, J3, J4, J5, J6, J7, J10, J30).
2. Disconnect the Relay Coupler(J2, J8, J15).
3. Remove the 4 screws and then remove the Slot Block.
4. Disconnect the couplers(J2, J8, J15).

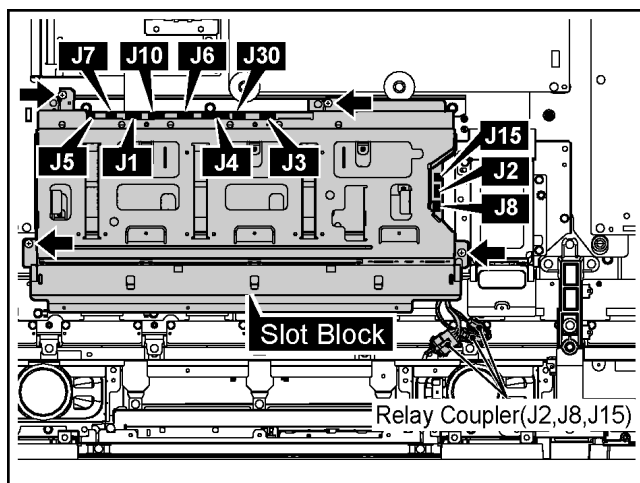


6.3. Removal of the J-Board

1. Remove the Slot Block.
(Reference to Removal of the Slot Block)
2. The Slot Block is turned inside out.
3. Remove the 6 screws and then remove the Slot cover.

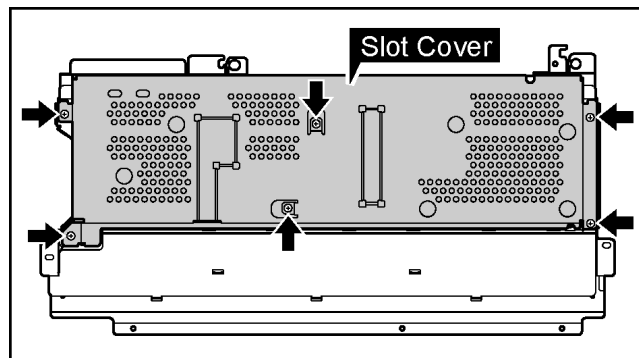


4. Remove the 6 screws, release the coupler(J14) from HX-Board and then remove the J-Board.

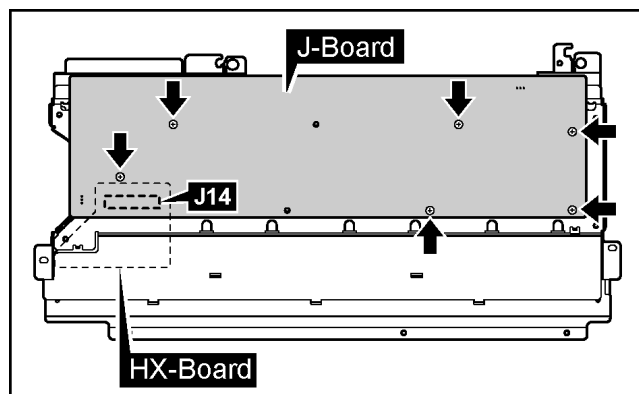


6.4. Removal of the HX-Board

1. Remove the Slot Block.
(Reference to Removal of the Slot Block)
2. Remove the J-Board.
(Reference to Removal of the J-Board)
3. Remove the 2 screws and then remove the Slot Case.

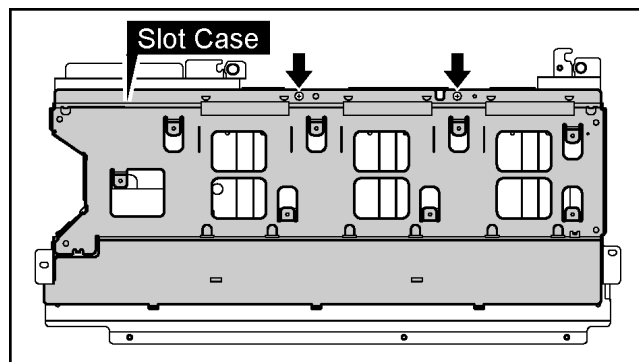


4. Remove the 4 Hexagonal-Head screws and the 1 screw and then remove the HX-Board.

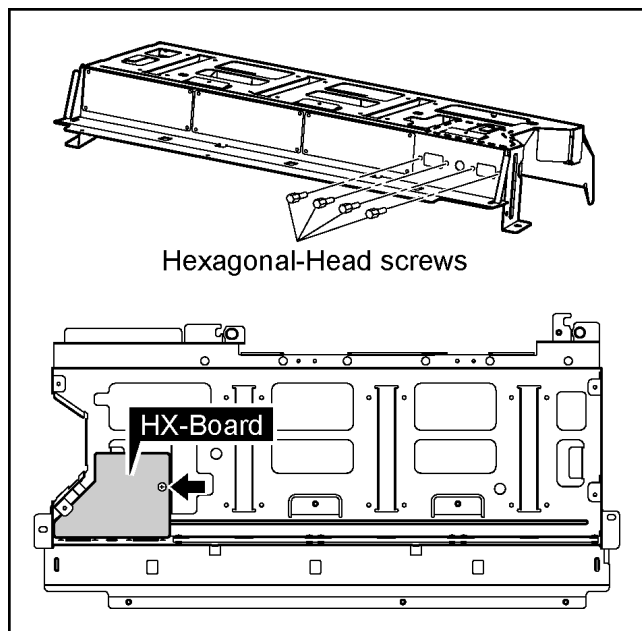


6.5. Removal of the PB-Board

1. Disconnect the couplers (PB30, PB31, PB33, PB35).
2. Remove the 1 screw and then remove the PB-Board.

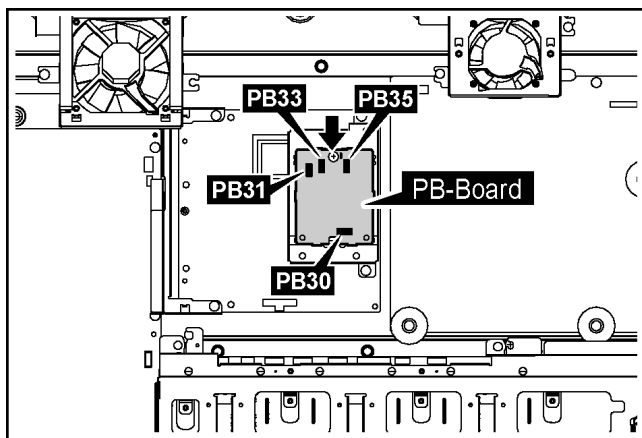


6.6. Removal of the DA-Board

1. Disconnect the couplers (PB30, PB31, PB33, PB35).
2. Remove the 2 screws and then remove the PB-Board Block.

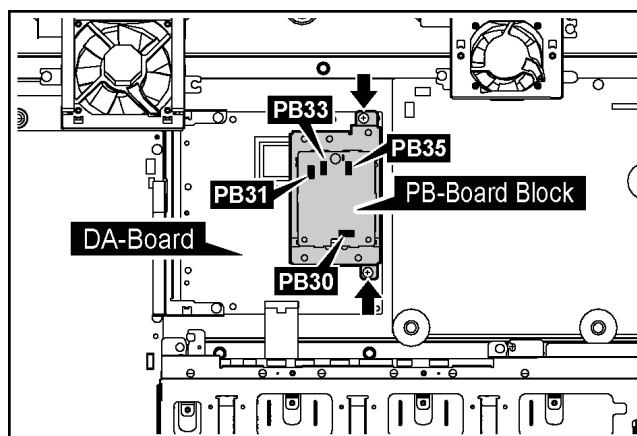

3. Disconnect the couplers (DA1, DA3, DA5, DA6).
4. Remove the Flexible Cable from the coupler (DA2).
5. Remove the 2 screws and then remove the DA-Board and the Fixed Plate.

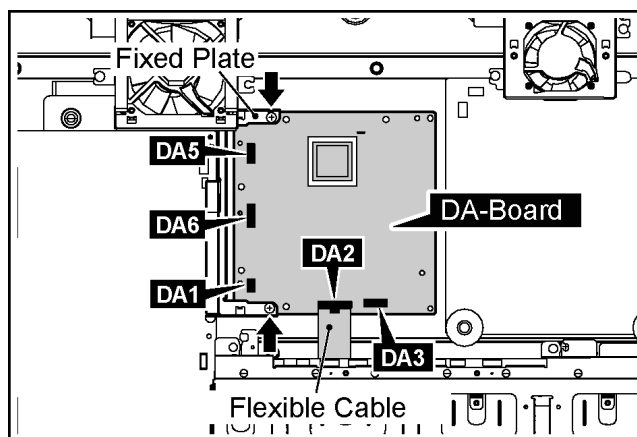


Note:

A re-setup of the destination is performed by MS mode after DA-Board exchange.


6.7. Removal of the P-Board

1. Disconnect the couplers(P2, P5, P9, P10, P11, P12, P23, P25)
2. Remove the 6 screws and then remove the P-Board.

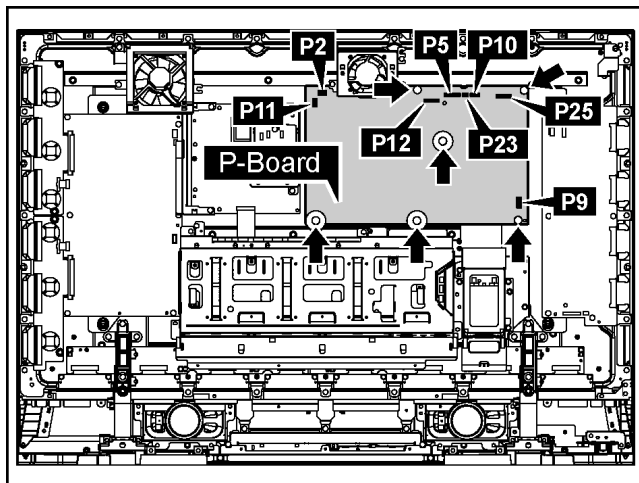


6.8. Removal of the D-Board

1. Remove the Slot Block.
(Reference to Removal of the Slot Block)
2. Disconnect the couplers(D5, D20, D25)
3. Remove the Flexible Cable from the couplers (D3, D31, D32).
4. Remove the 4 screws and then remove the D-Board.

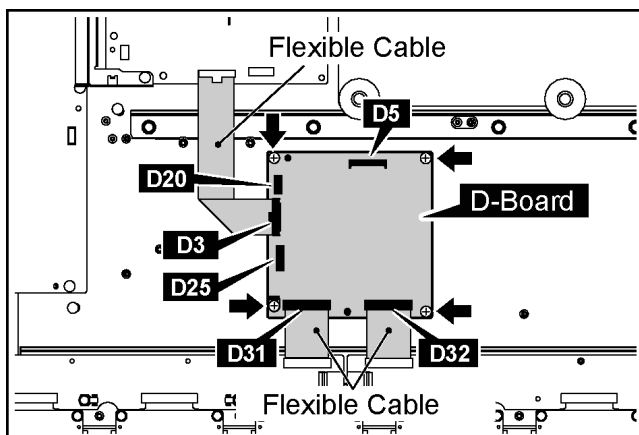


6.9. Removal of the SU-Board and the SD-Board

1. Remove the Flexible Cable from the couplers(SU1, SU2, SU3, SD1, SD2, SD3).
2. Remove the each 2 screws.

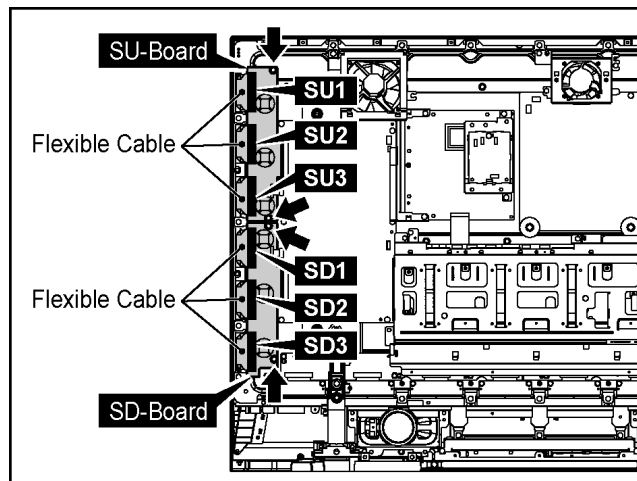


3. Disconnect the couplers(SU45, SD46).
4. Slide the SU-Board and the SD-Board to the left, remove the SU-Board and the SD-Board from the couplers(SC41, SC42).

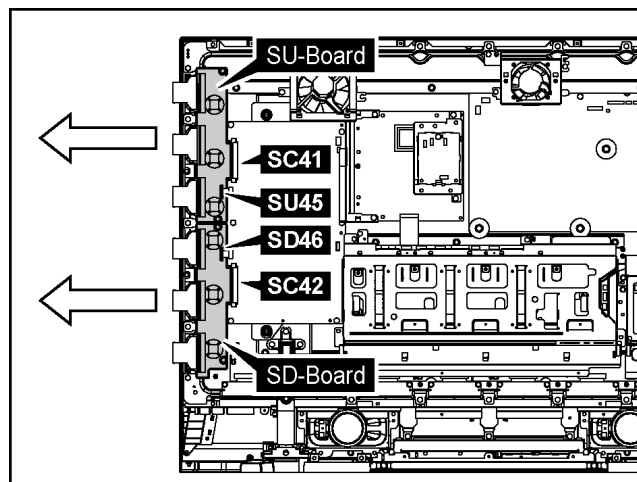


6.10. Removal of the SC-Board

1. Disconnect the couplers(SU45, SD46).
2. Remove the each 2 screws (⬆) and then slide the SU-Board and the SD-Board to the left.

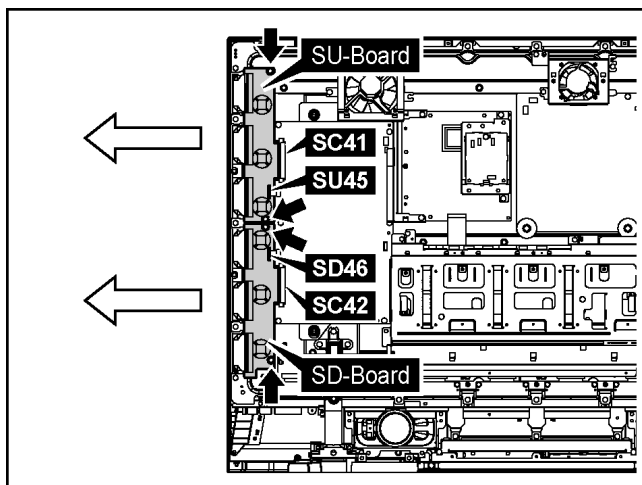


3. Disconnect the couplers(SC2, SC20, SC23).
4. Remove the 6 screws and then remove the SC-Board.

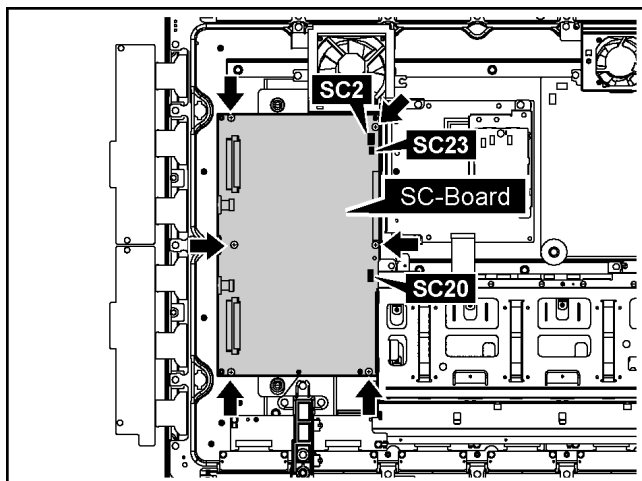


6.11. Removal of the SS-Board

1. Disconnect the couplers(SS11, SS12, SS23, SS34).
2. Remove the Flexible Cable from the couplers(SS41, SS42, SS43, SS44)
3. Remove the 6 screws and then remove the SS-Board.

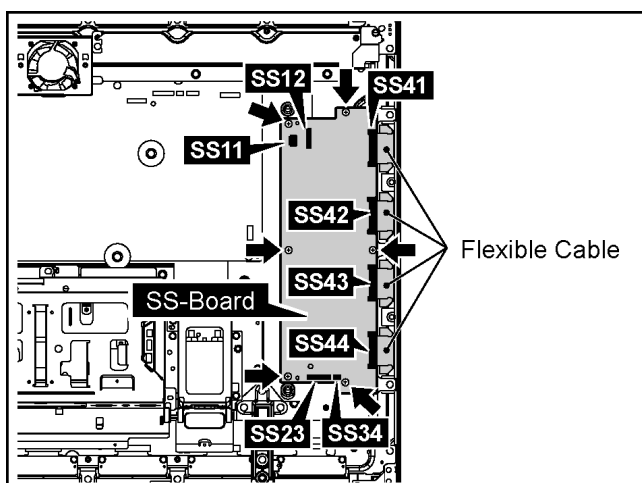


6.12. Removal of the C1, C2-Board

1. Remove the Slot Block.
(Reference to Removal of the Slot Block)
2. Remove the 1 screw (⬆) and then remove the Ferrite Core.
3. Remove the each 6 screws (⬆) and then remove the Stand Block(L, R).

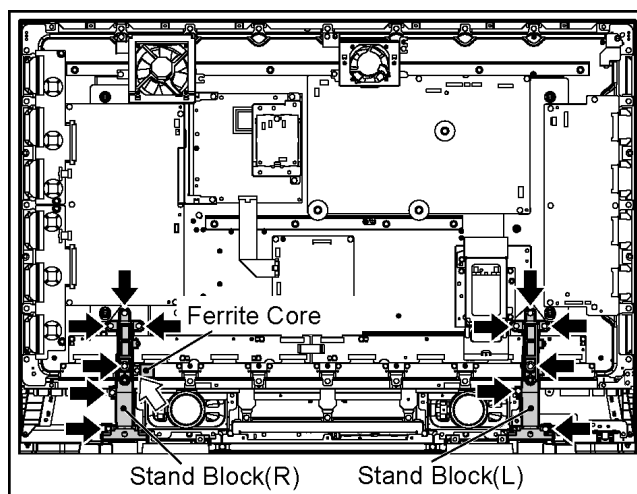


6.12.1. Removal of the C1-Board

1. Remove the Flexible Cable from the couplers(C11, C12).
2. Remove the 8 screws (⬆) and then remove the Flexible Cable from the couplers(CB1, CB2, CB3, CB4).
3. Remove the 4 screws (⬆) and then remove the C1-Board.

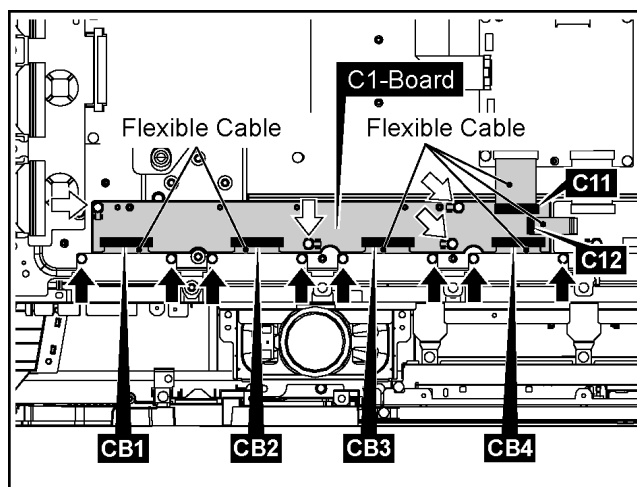


6.12.2. Removal of the C2-Board

1. Remove the Flexible Cable from the couplers(C21, C22).
2. Remove the 8 screws (▲) and then remove the Flexible Cable from the couplers(CB5, CB6, CB7, CB8).
3. Remove the 4 screws (△) and then remove the C2-Board.

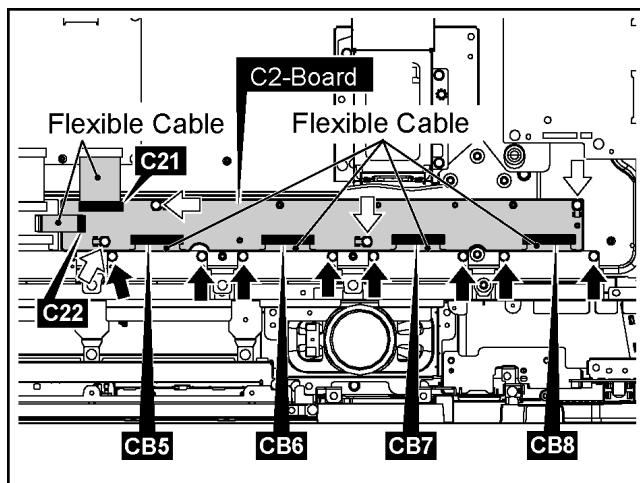


6.13. Removal of the S-Board

1. Disconnect the coupler(S1).

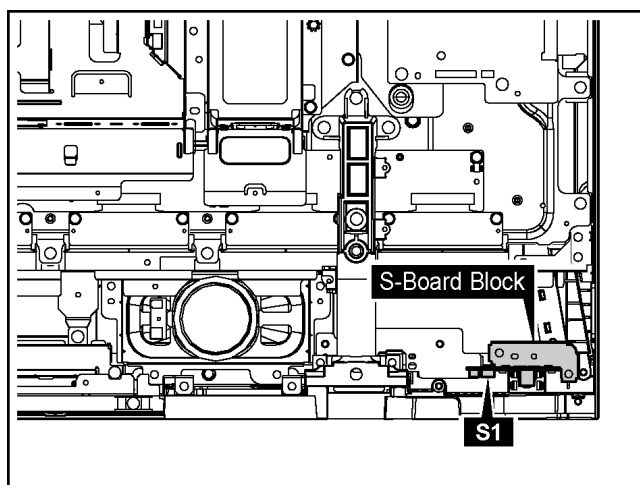


2. Remove the 2 screws(A) and then remove the S-Board Block.
3. Disconnect the coupler(S1).
4. Remove the 2 screw(B) and then remove the S-Board.

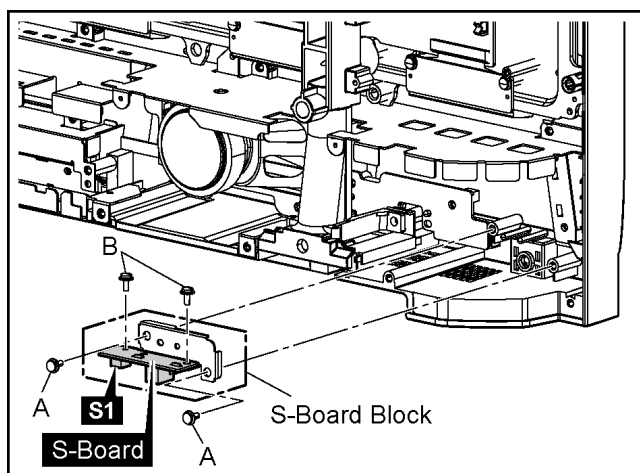


6.14. Removal of the GK-Board

1. Remove the 2 screws(C) and then remove the Plate(A).
2. Remove the 2 screws(D).
3. Disconnect the coupler(GK3) and then remove the GK-Board.

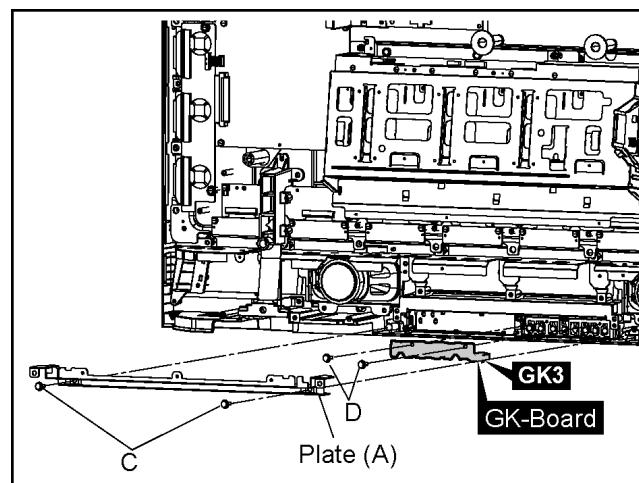


6.15. Removal of the K-Board

1. Remove the 2 screws(E).
2. Disconnect the coupler(K1) and then remove the K-Board.

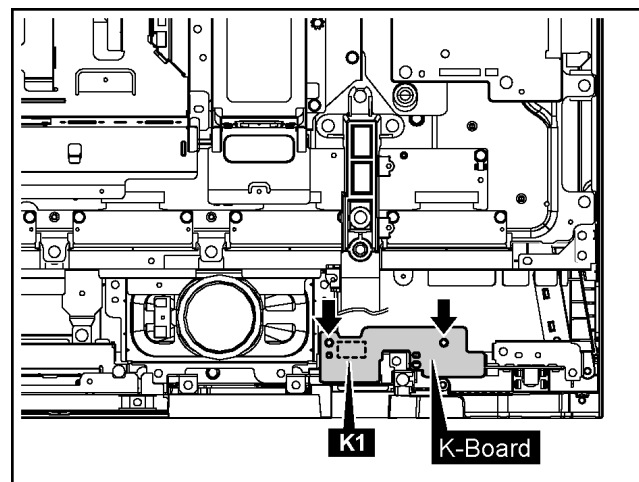


6.16. Removal of the Fan


1. Disconnect the Fan Relay Couplers.
2. Remove the each 3 screws and then remove the Fan Blocks.

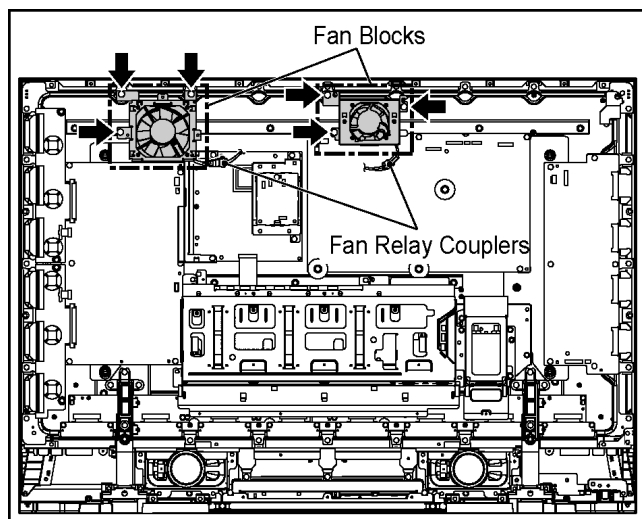

3. Remove the each 4 screws (E) and then remove the Fans.

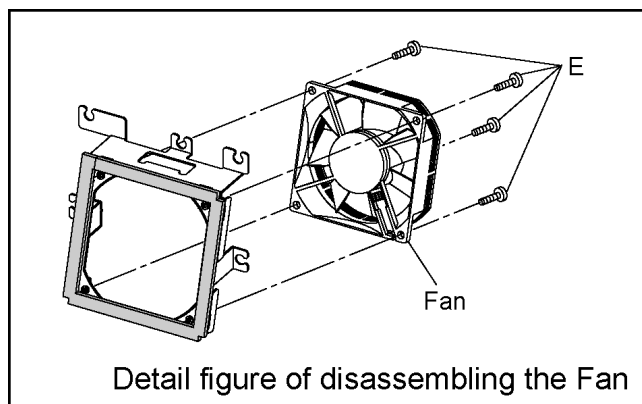

4. Reassemble the Fans in reverse order.
5. Stick the Cushion (Fan) around the Fan.

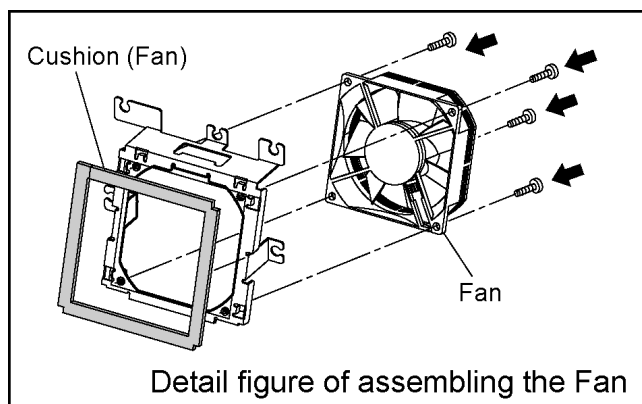


Note:


The Cushion (Fan) are unsuitable to reuse.
Please use a new one at the time of Fan exchange.

6.17. Removal of the Escutcheon


1. Disconnect the Relay Coupler(J2, J8, J5).
2. Disconnect the coupler(S2).

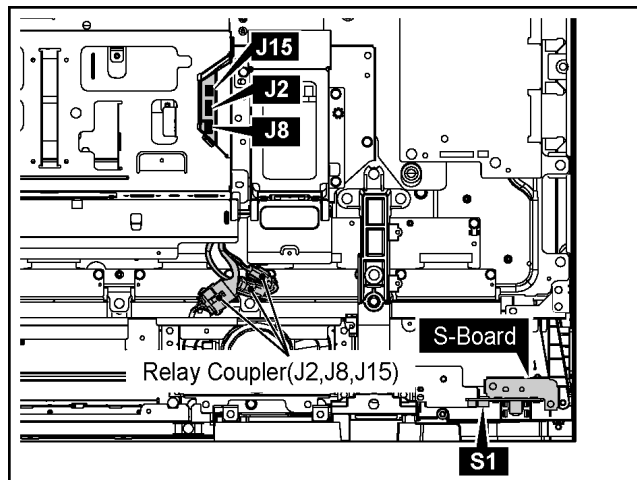


3. Disconnect the coupler(J7).
4. Remove the 1 screw (⇧) and then remove the Ferrite core from the Stand Block(R).
5. Remove the 10 screws (⇧).

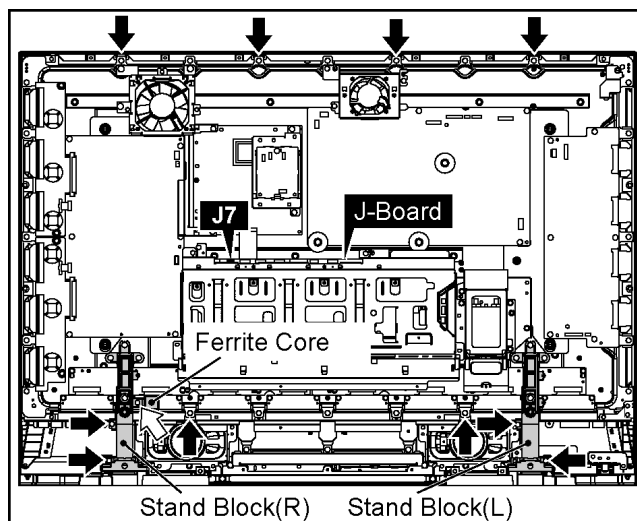


6. Lift up the bottom of the Plasma Panel in the direction of the arrow1 and pull the Plasma Panel in the direction of the arrow2 and then remove the Plasma Panel.

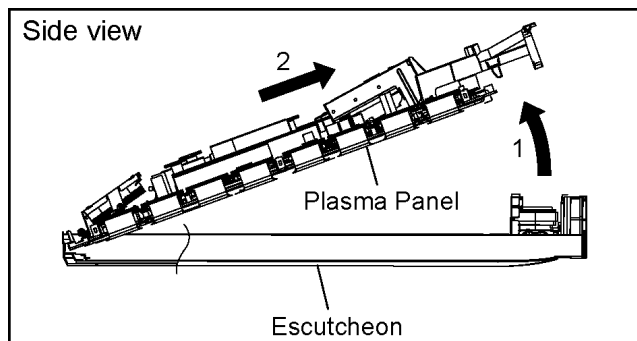

7. Remove the S-Board Block.
(Remove to the Removal of the S-Board)
8. Remove the K-Board.
(Remove to the Removal of the K-Board)
9. Remove the GK-Board.
(Remove to the Removal of the GK-Board)
10. Remove the 5 screws(F) and then remove the Plate(B).
11. Remove the 2 screws(G) and then remove the Control Panel.

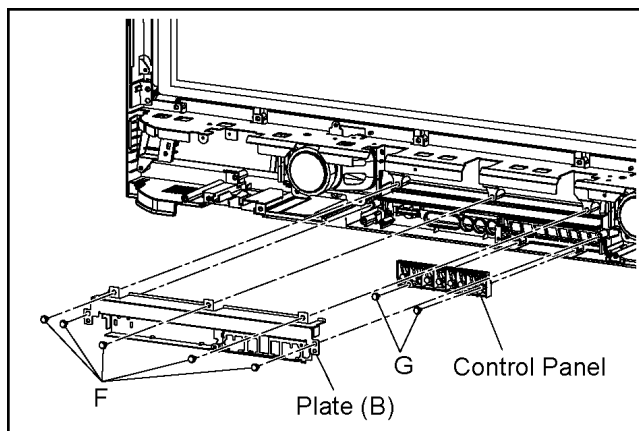


12. Remove the 1 screw(H) and then remove the Spring.
13. Remove the 3 hooks and then remove the Door.
14. Remove the 4 hooks and then remove the Power SW.

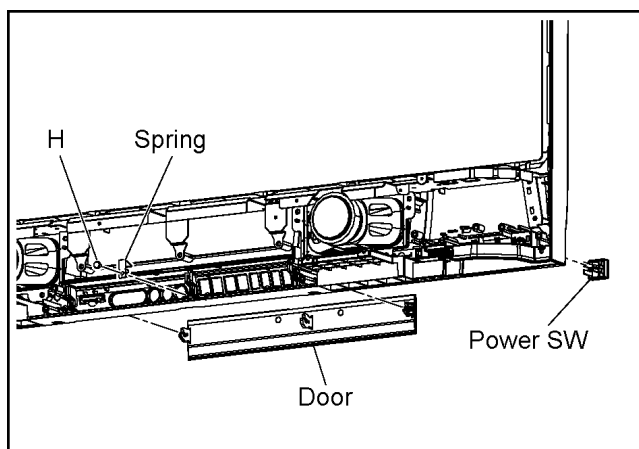


15. Remove the each screws and then remove the Glass Fixed Plate (L, R, Upper, Lower).

Removed number of screws:

- each 6 screws (L, R)
- 5 screws (Upper)
- 6 screws (Lower)

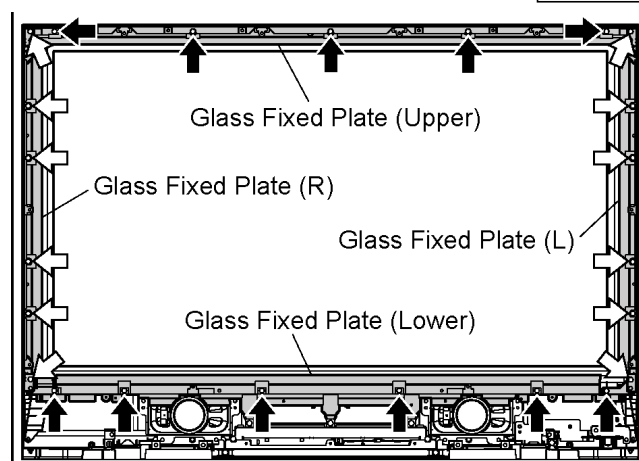


16. Remove the Front Glass.
17. Remove the each 1 screw (⇧) and then remove the Plate(L, R).
18. Remove the each 4 screws (⇩) and then remove the Speaker (L/R).

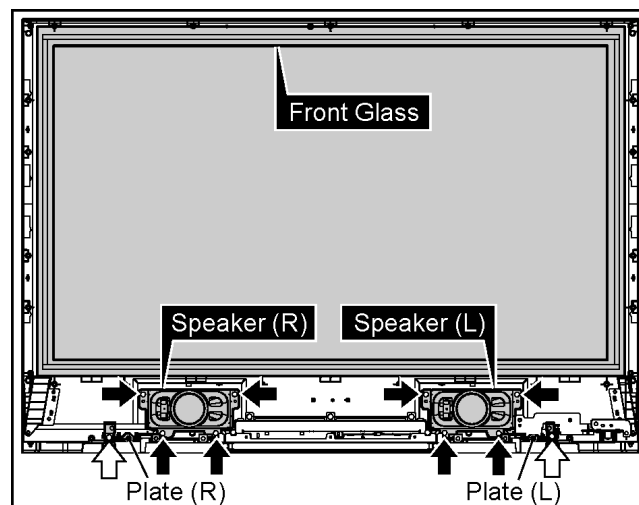


6.18. Removal of the Plasma Panel


1. Disconnect the Fan Relay Couplers.
2. Remove the each 3 screws (▲) and then remove the Fan Blocks.
3. Remove the 1 screw (☆) and then remove the Ferrite Core from the Stand Block(R).
4. Remove the each 6 screws (▲) and then remove the Stand Block(L, R).

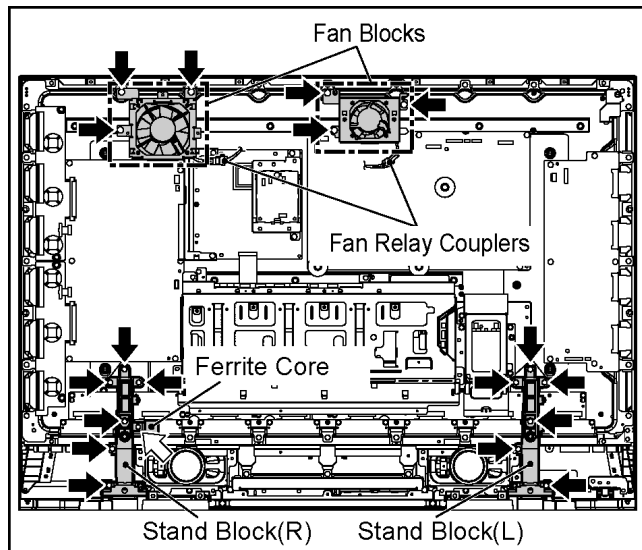


5. Disconnect the couplers(J1, J3, J4, J5, J6, J7, J10, J30).
6. Disconnect the Relay Coupler(J2,J8,J15).
7. Remove the 4 screws and then remove the Slot Block.

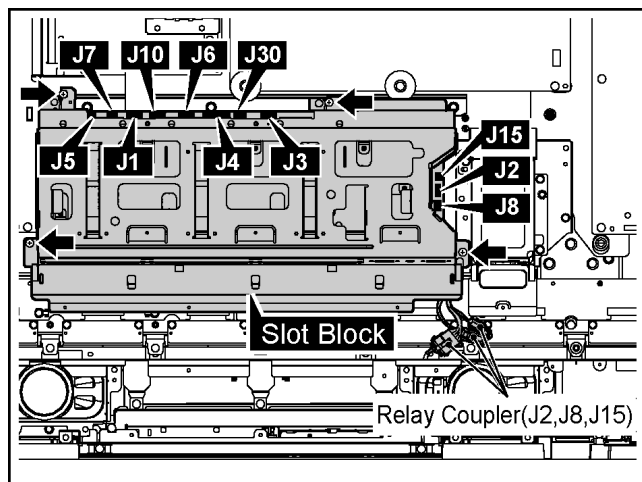


8. Disconnect the coupler(DA5).
9. Remove the Flexible Cable from the couplers(DA2).
10. Remove the 4 screws and then remove the DA-Board Block.

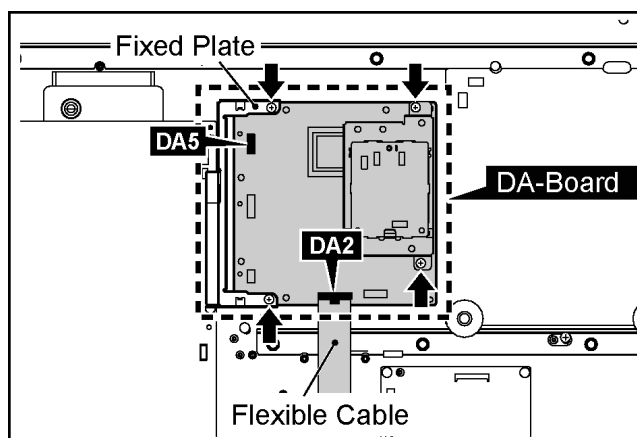

11. Disconnect the couplers(P2, P9, P11, P12, P23, P25).
12. Remove the 6 screws (▲) and then remove the P-Board.
13. Remove the 5 screws (☆) and then remove the AC-Inlet Block and the clumper.

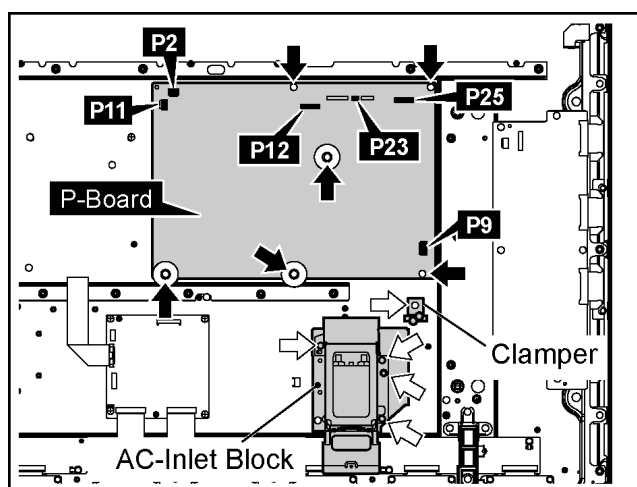

14. Disconnect the coupler(D20).
15. Remove the Flexible Cable from the couplers(D31, D32).
16. Remove the 4 screws and then remove the D-Board.

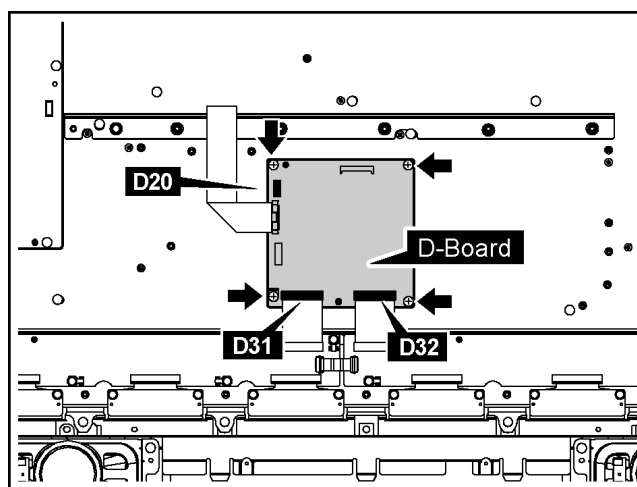


17. Remove the SU-Board and the SD-Board.

(Reference to Removal of the SU-Board and the SD-Board)

18. Remove the 7 screws (▲) and then remove the SC-Board and the clamper.

19. Remove the 2 screws (◀) and then remove the Plate.

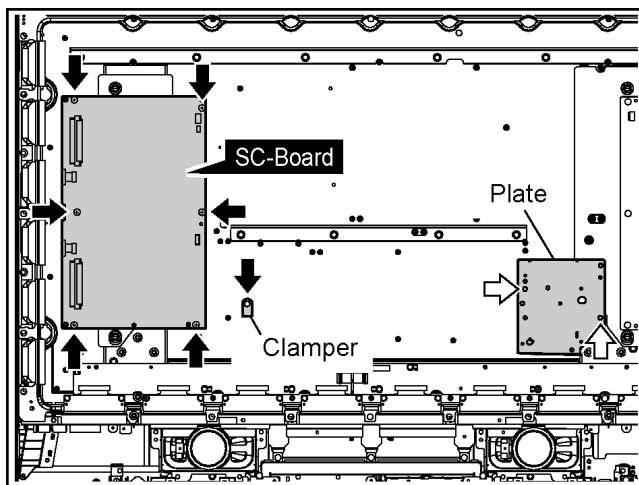


20. Disconnect the couplers(SS23, SS34).

21. Remove the Flexible Cable from the couplers(SS41, SS42, SS43, SS44).


22. Remove the 6 screws (▲) and then remove the SS-Board.

23. Remove the 1 screw (◀) and then remove the Ferrite Core.

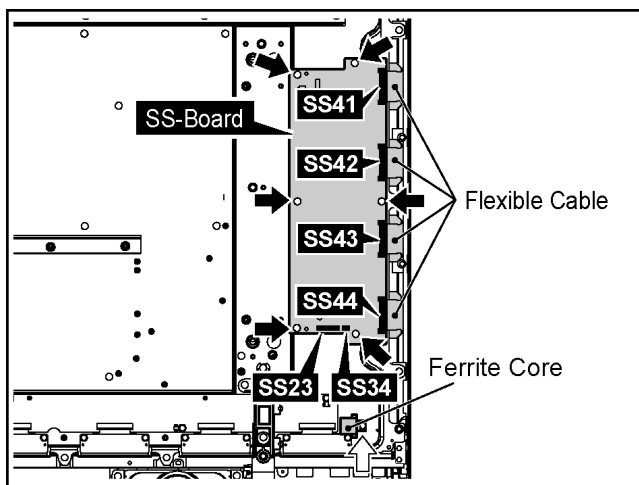


24. Remove the 8 screws (▲) and then remove the Flexible Cable from the couplers(CB1, CB2, CB3, CB4, C12).

25. Remove the 4 screws (◀) and then remove the C1-Board.

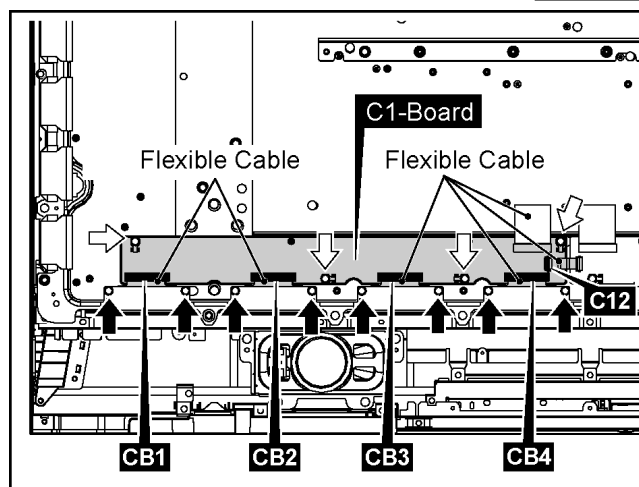


26. Remove the 8 screws (▲) and then remove the Flexible Cable from the couplers(CB5, CB6, CB7, CB8).

27. Remove the 4 screws (◀) and then remove the C2-Board.

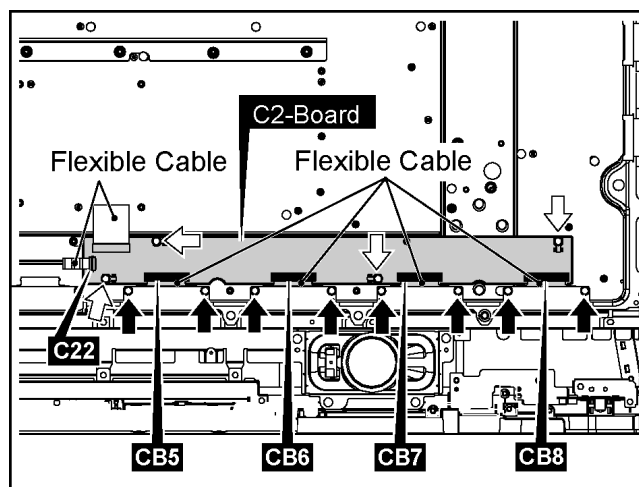

28. Lift up the bottom of the Plasma Panel in the direction of the arrow1 and pull the Plasma Panel in the direction of the arrow2 and then remove the Plasma Panel.

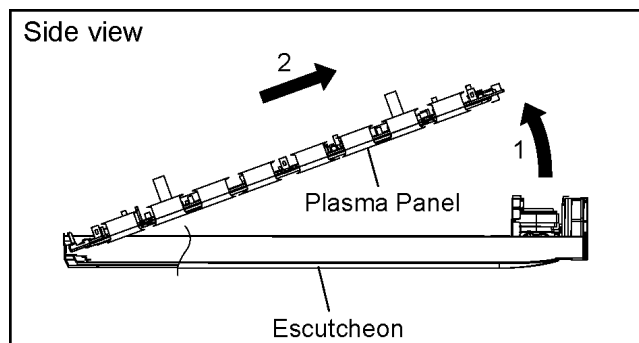


7 Disassembly TH-42PR9U

- To disassemble P.C.B., wait for 1 minute after power was off for discharge from electrolysis capacitors.
- ⬆ and ⬇ marks indicate screw positions.


7.1. Removal of the Back Cover

1. Remove the screws (×6 ○, ×6 ⊙, ×14 □, ×8 ●) and then remove the Back Cover.

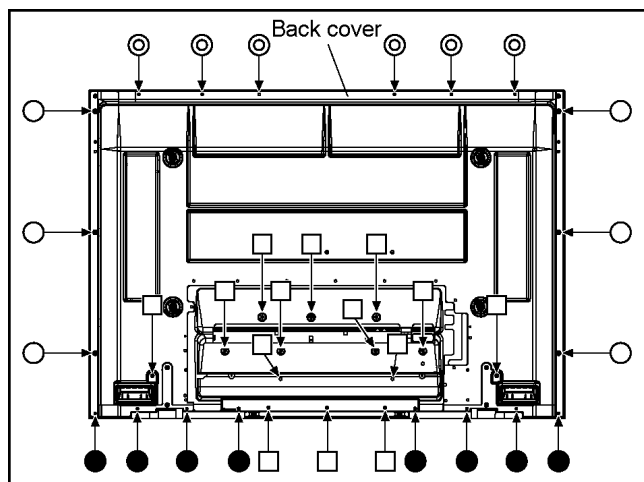


7.2. Removal of the Slot Block

1. Disconnect the couplers(J1, J3, J4, J5, J6, J7, J10, J30).
2. Disconnect the Relay Coupler(J2, J8, J15).
3. Remove the 4 screws and then remove the Slot Block.
4. Disconnect the couplers(J2, J8, J15).

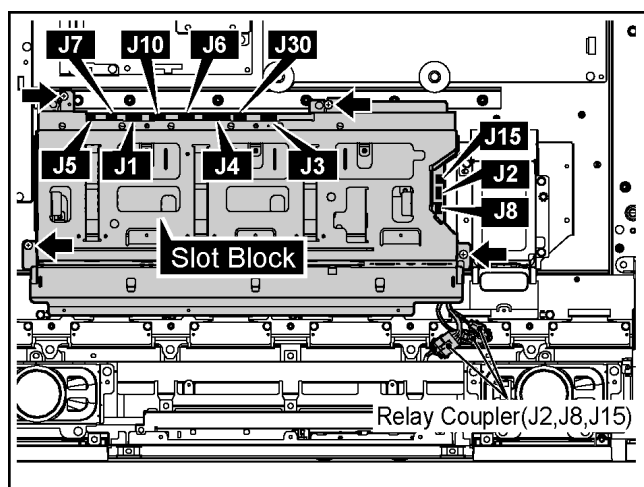


7.3. Removal of the J-Board

1. Remove the Slot Block.
(Reference to Removal of the Slot Block)
2. The Slot Block is turned inside out.
3. Remove the 6 screws and then remove the Slot cover.

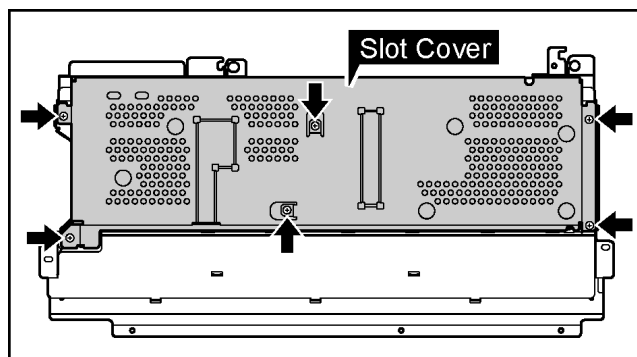


4. Remove the 6 screws, release the coupler(J14) from HX-Board and then remove the J-Board.

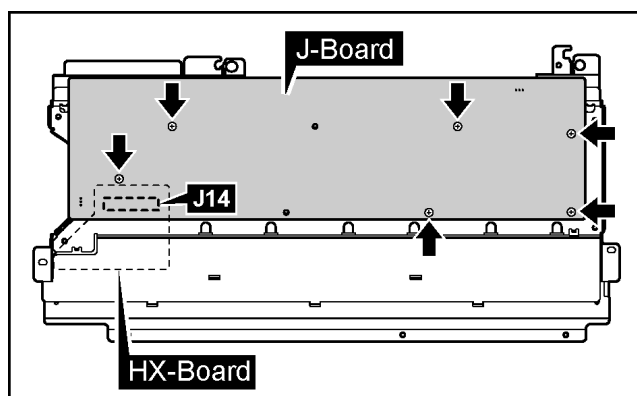


7.4. Removal of the HX-Board

1. Remove the Slot Block.
(Reference to Removal of the Slot Block)
2. Remove the J-Board.
(Reference to Removal of the J-Board)
3. Remove the 2 screws and then remove the Slot Case.

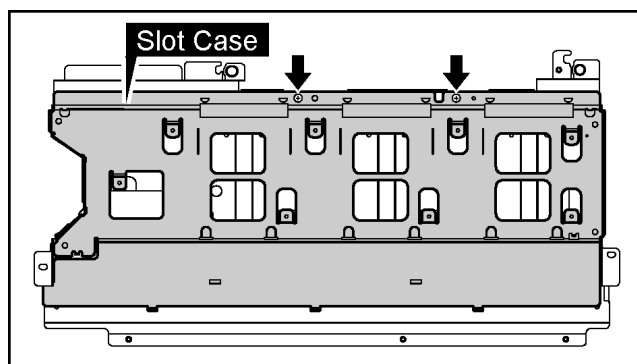


4. Remove the 4 Hexagonal-Head screws and the 1 screw and then remove the HX-Board.

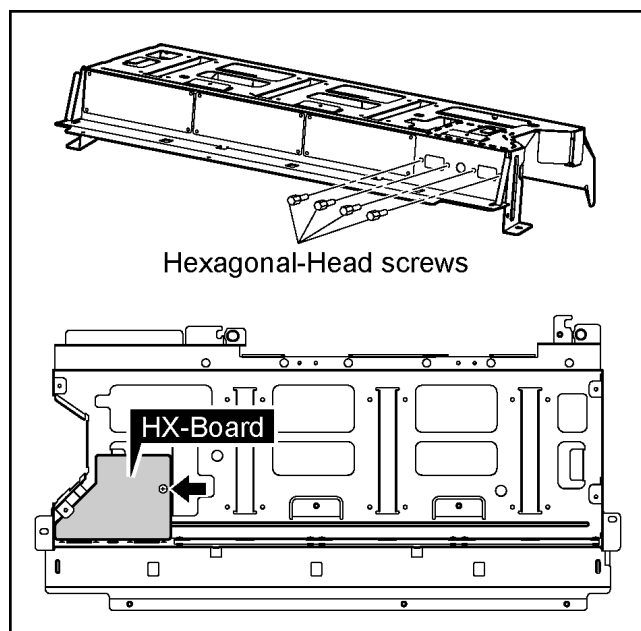


7.5. Removal of the PB-Board

1. Disconnect the couplers (PB30, PB31, PB33, PB35).
2. Remove the 1 screw and then remove the PB-Board.

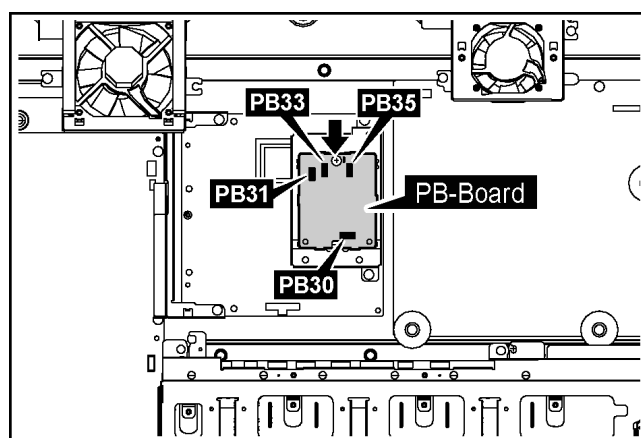


7.6. Removal of the DA-Board

1. Disconnect the couplers (PB30, PB31, PB33, PB35).
2. Remove the 2 screws and then remove the PB-Board Block.

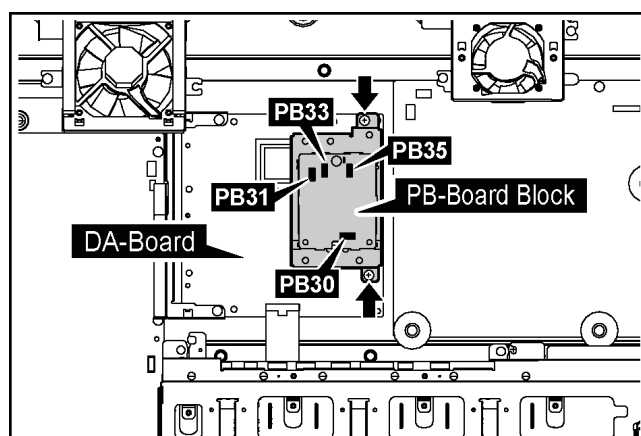

3. Disconnect the couplers (DA1, DA3, DA5, DA6).
4. Remove the Flexible Cable from the coupler (DA2).
5. Remove the 2 screws and then remove the DA-Board and the Fixed Plate.

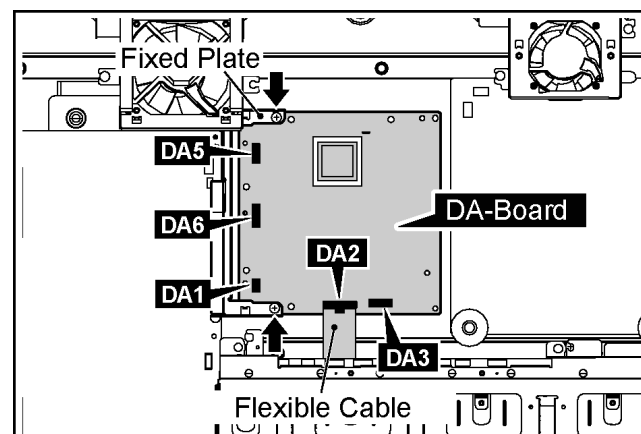


Note:

A re-setup of the destination is performed by MS mode after DA-Board exchange.


7.7. Removal of the P-Board

1. Disconnect the couplers (P2, P5, P9, P10, P11, P12, P23, P25).
2. Remove the 6 screws and then remove the P-Board.

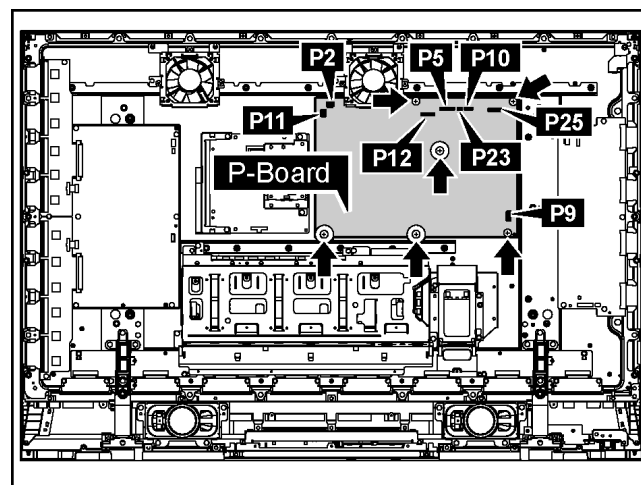


7.8. Removal of the D-Board

1. Remove the Slot Block.
(Reference to Removal of the Slot Block)
2. Disconnect the couplers(D5, D20, D25)
3. Remove the Flexible Cable from the couplers (D3, D31, D32).
4. Remove the 4 screws and then remove the D-Board.

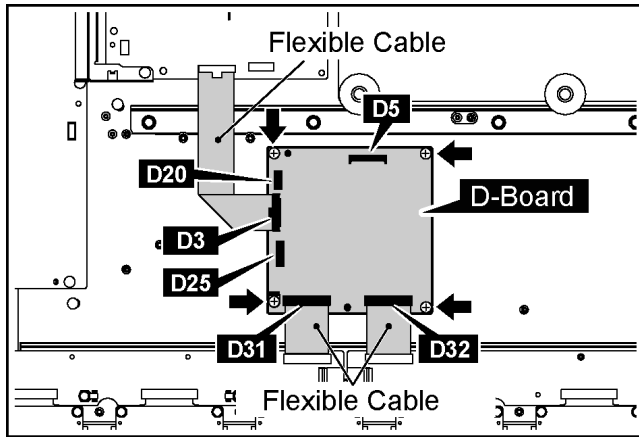


7.9. Removal of the SU-Board and the SD-Board

1. Remove the Flexible Cable from the couplers(SU1, SU2, SU3, SU4, SD1, SD2, SD3, SD4).
2. Remove the 3 screws.

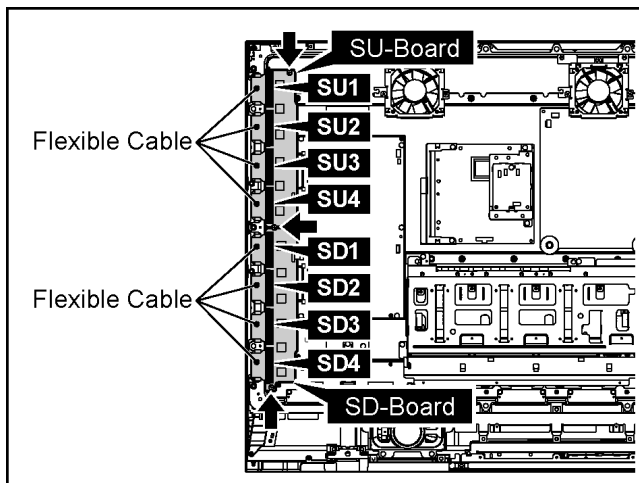


3. Disconnect the couplers(SU45, SD46).

4. Slide the SU-Board and the SD-Board to the left, remove the SU-Board and the SD-Board from the couplers(SC41, SC42).

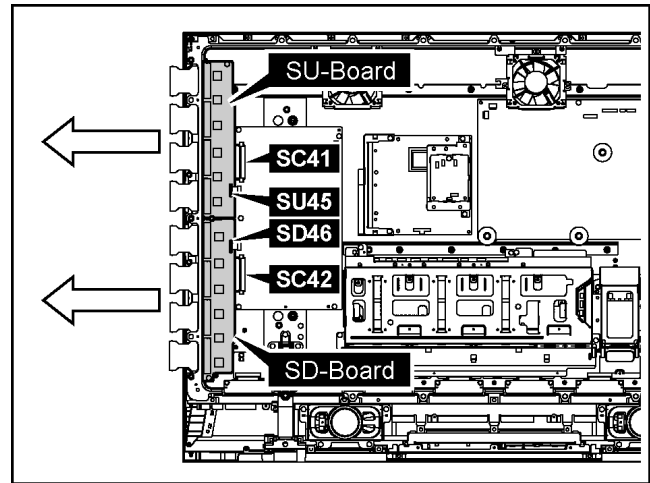


7.10. Removal of the SC-Board

1. Disconnect the couplers(SU45, SD46).
2. Remove the 3 screws (▲) and then slide the SU-Board and the SD-Board to the left.

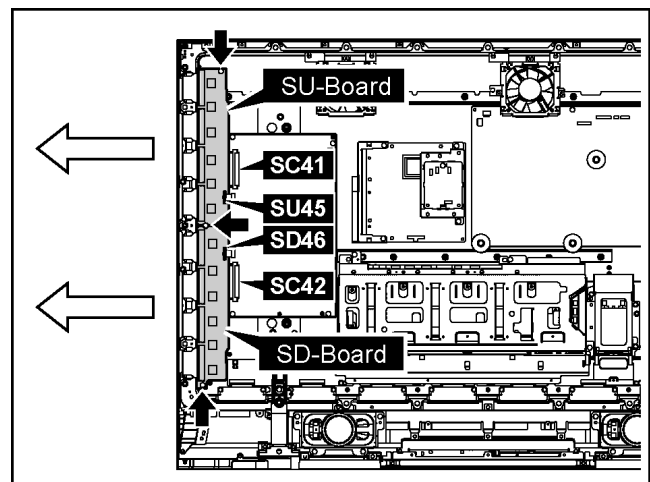


3. Disconnect the couplers(SC2, SC20, SC23).

4. Remove the 6 screws and then remove the SC-Board.

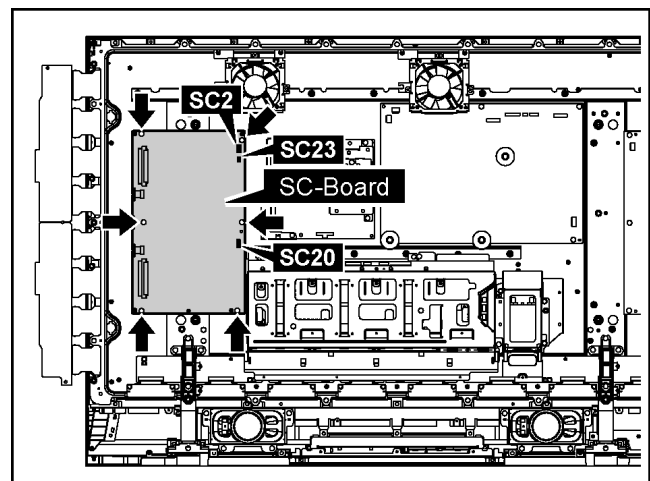


7.11. Removal of the SS-Board

1. Disconnect the couplers(SS11, SS12, SS23, SS34).
2. Remove the Flexible Cable from the couplers(SS41, SS42, SS43, SS44)
3. Remove the 6 screws and then remove the SS-Board.

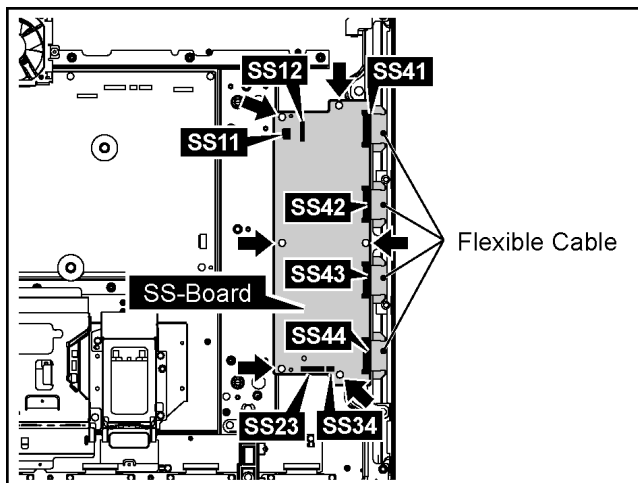


7.12. Removal of the C1, C2-Board

1. Remove the Slot Block.
(Reference to Removal of the Slot Block)
2. Remove the 1 screw (⬆) and then remove the Ferrite Core.
3. Remove the each 6 screws (⬆) and then remove the Stand Block(L, R).

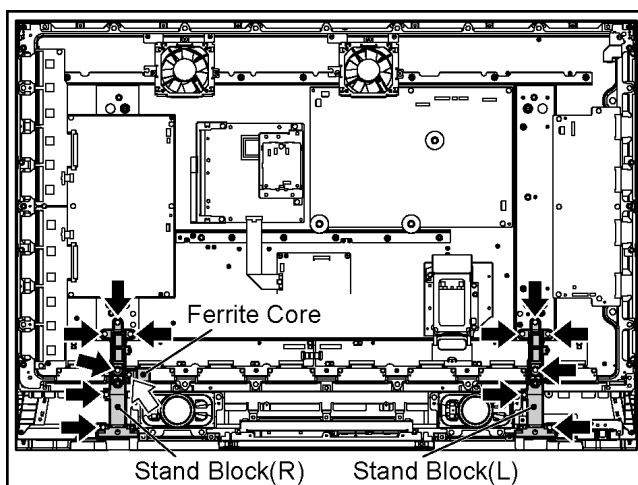


7.12.1. Removal of the C1-Board

1. Remove the Flexible Cable from the couplers(C11, C12).
2. Remove the 8 screws (⬆) and then remove the Flexible Cable from the couplers(CB1, CB2, CB3, CB4).
3. Remove the 4 screws (⬆) and then remove the C1-Board.

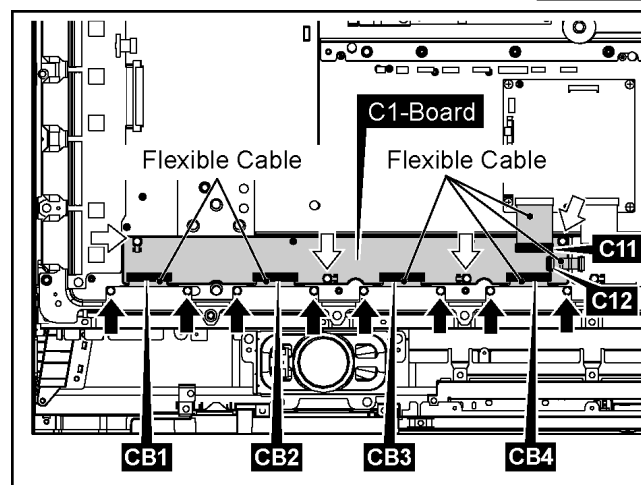


7.12.2. Removal of the C2-Board

1. Remove the Flexible Cable from the couplers(C21, C22).
2. Remove the 8 screws (⬆) and then remove the Flexible Cable from the couplers(CB5, CB6, CB7, CB8).
3. Remove the 4 screws (⬆) and then remove the C2-Board.

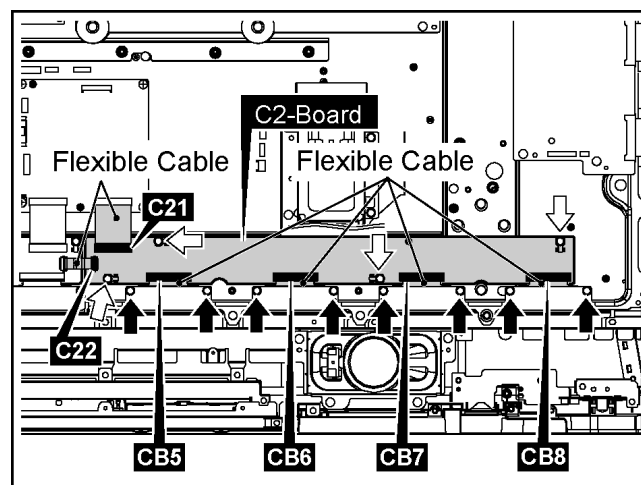


7.13. Removal of the S-Board

1. Disconnect the coupler(S1).

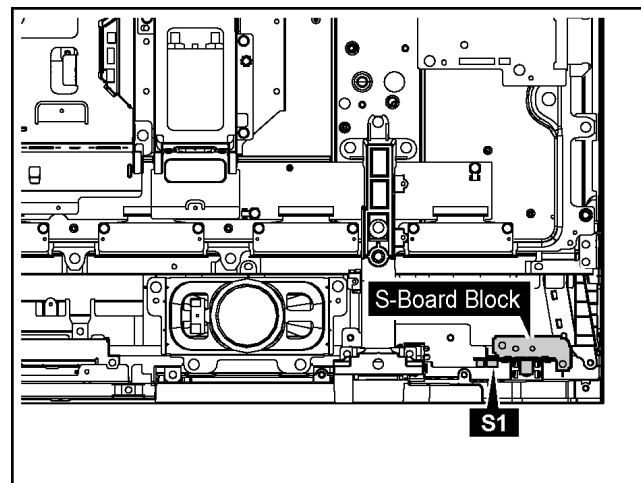


2. Remove the 2 screws(A) and then remove the S-Board Block.
3. Remove the 2 screw(B) and then remove the S-Board.

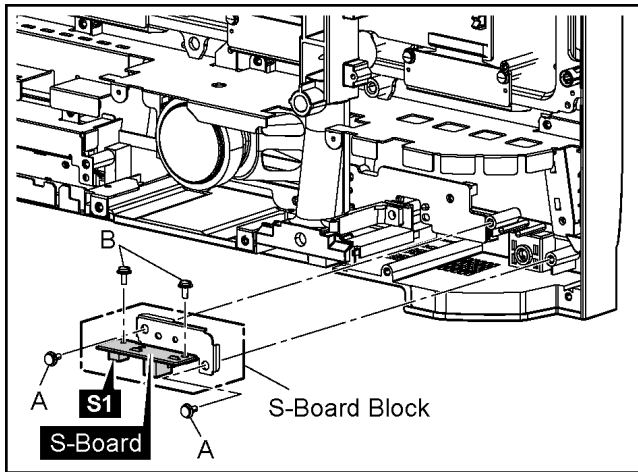


7.14. Removal of the GK-Board

1. Remove the 2 screws(C) and then remove the Plate(A).
2. Remove the 2 screws(D).
3. Disconnect the coupler(GK3) and then remove the GK-Board.

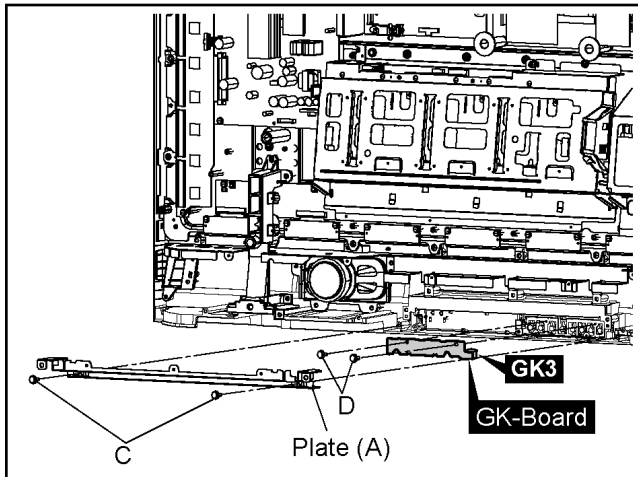


7.15. Removal of the K-Board

1. Remove the 2 screws(E).
2. Disconnect the coupler(K1) and then remove the K-Board.

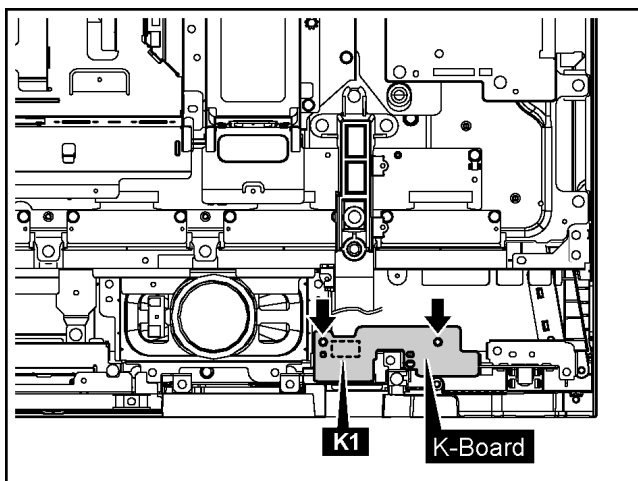


7.16. Removal of the Fan


1. Disconnect the Fan Relay Couplers.
2. Remove the each 3 screws and then remove the Fan Blocks.

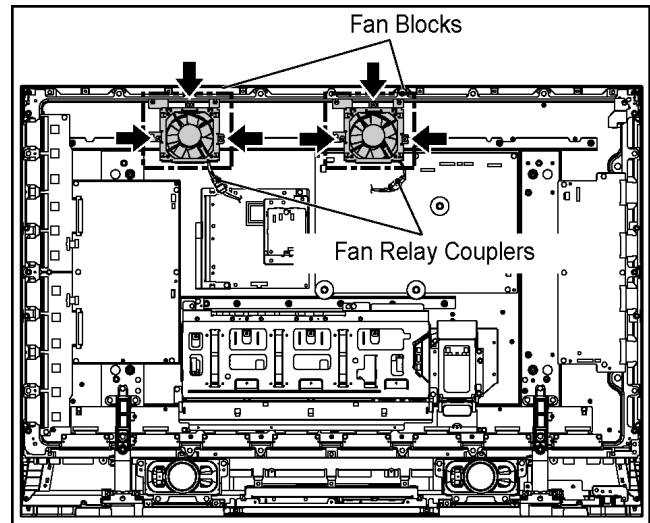

3. Remove the each 4 screws (E) and then remove the Fans.

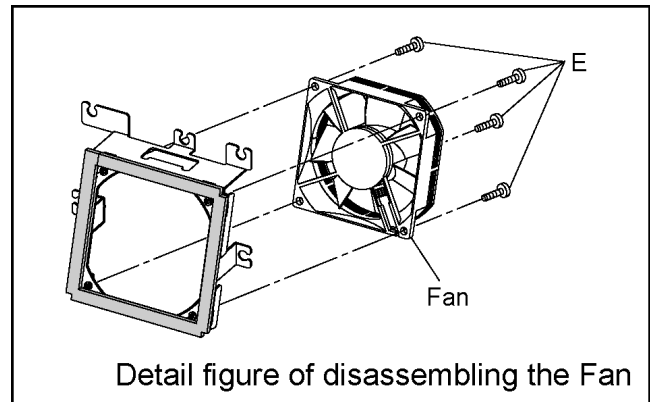

4. Reassemble the Fans in reverse order.
5. Stick the Cushion (Fan) around the Fan.

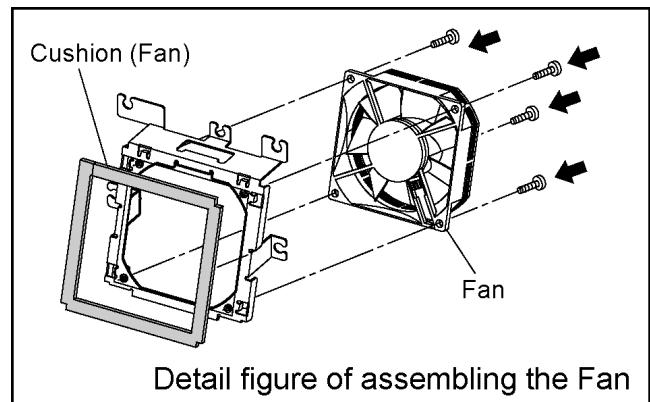


Note:


The Cushion (Fan) are unsuitable to reuse.
Please use a new one at the time of Fan exchange.

7.17. Removal of the Escutcheon


1. Disconnect the Relay Coupler(J2, J8, J5).
2. Disconnect the coupler(S1).

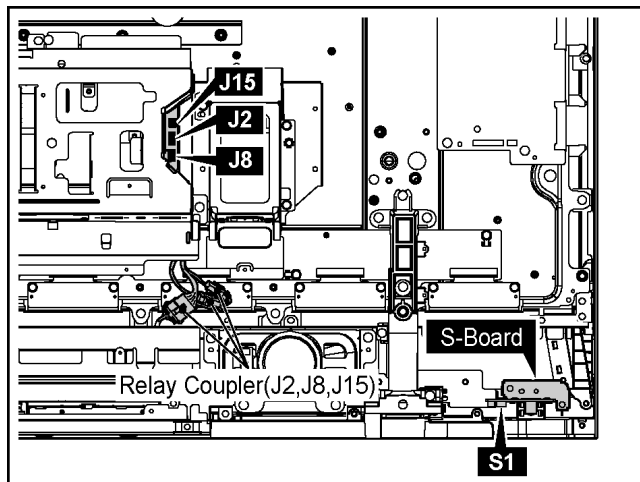


3. Disconnect the coupler(J7).
4. Remove the 1 screw (⇩) and then remove the Ferrite core from the Stand Block(R).
5. Remove the 10 screws (⇩).

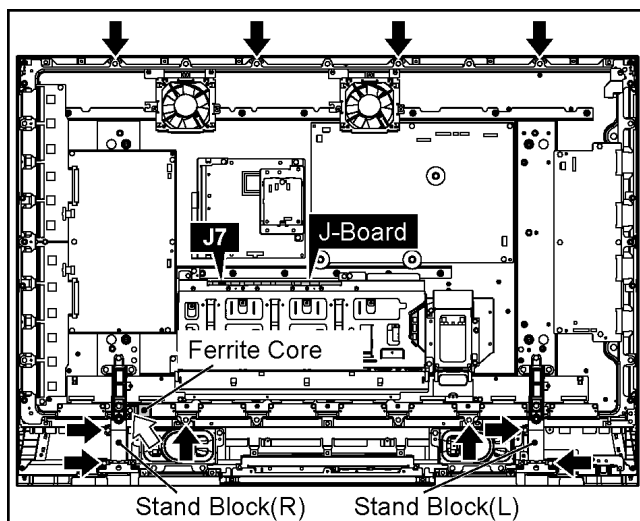


6. Lift up the bottom of the Plasma Panel in the direction of the arrow1 and pull the Plasma Panel in the direction of the arrow2 and then remove the Plasma Panel.

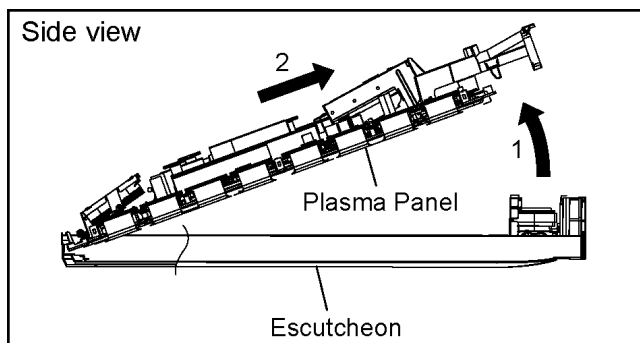

7. Remove the S-Board Block.
(Remove to the Removal of the S-Board)
8. Remove the K-Board.
(Remove to the Removal of the K-Board)
9. Remove the GK-Board.
(Remove to the Removal of the GK-Board)
10. Remove the 5 screws(F) and then remove the Plate(B).
11. Remove the 2 screws(G) and then remove the Control Panel.

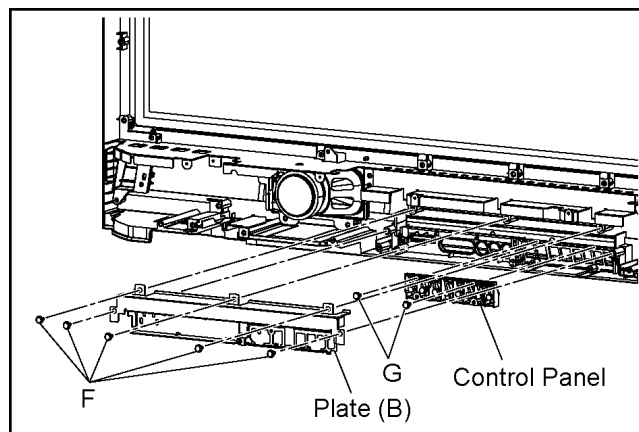

12. Remove the 1 screw(H) and then remove the Spring.
13. Remove the 3 hooks and then remove the Door.
14. Remove the 4 hooks and then remove the Power SW.

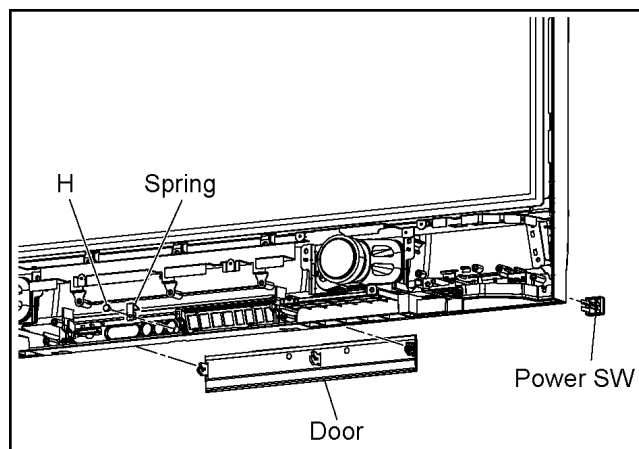


15. Remove the each screws and then remove the Glass Fixed Plate (L, R, Upper, Lower).

Removed number of screws:

each 6 screws (L, R)

5 screws (Upper)


7 screws (Lower)

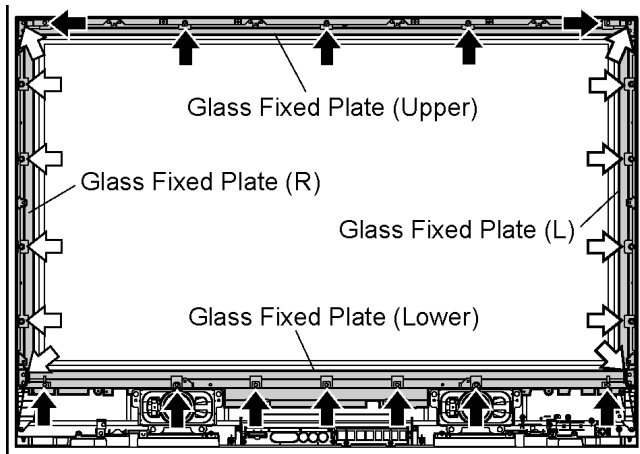

16. Remove the Front Glass.


17. Remove the each 1 screw (⬆) and then remove the Plate(L, R).

18. Remove the each 4 screws (⬆) and then remove the Speaker (L/R).

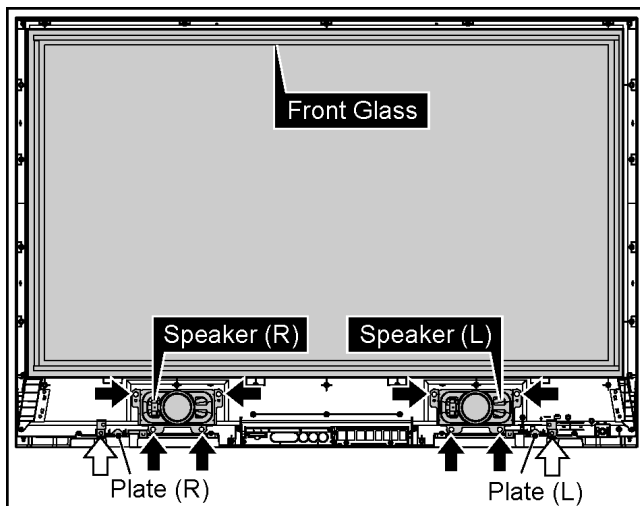


7.18. Removal of the Plasma Panel


1. Disconnect the Fan Relay Couplers.
2. Remove the each 3 screws (⬆) and then remove the Fan Blocks.
3. Remove the 1 screw (⬆) and then remove the Ferrite Core from the Stand Block(R).
4. Remove the each 6 screws (⬆) and then remove the Stand Block(L, R).

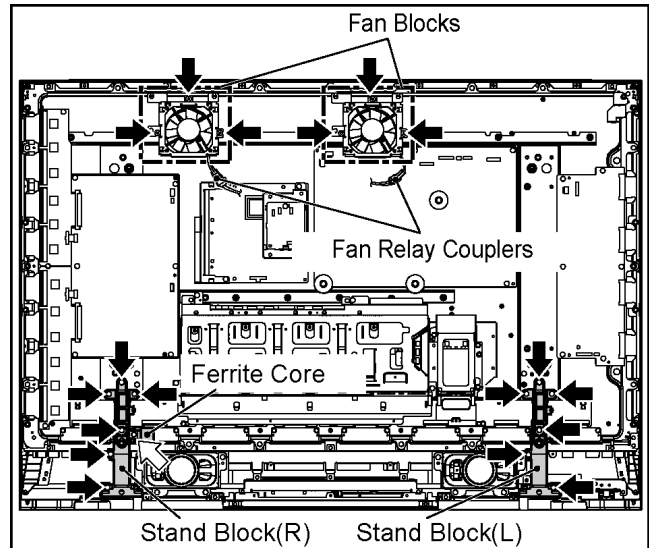


5. Disconnect the couplers(J1, J3, J4, J5, J6, J7, J10, J30).
6. Disconnect the Relay Coupler(J2,J8,J15).
7. Remove the 4 screws and then remove the Slot Block.

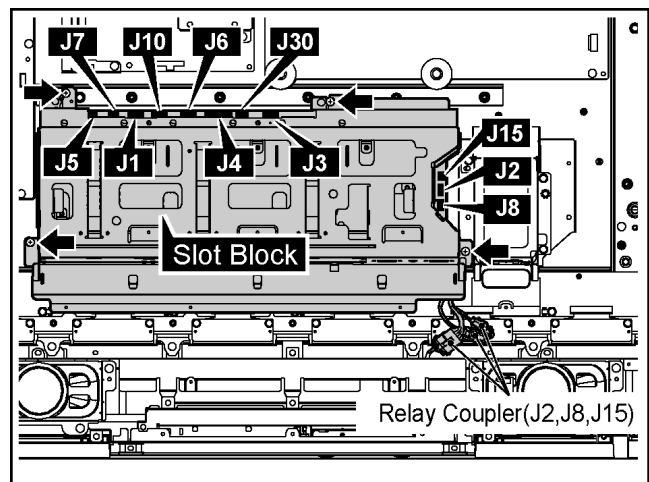


8. Disconnect the coupler(DA5).
9. Remove the Flexible Cable from the couplers(DA2).
10. Remove the 4 screws and then remove the DA-Board Block.

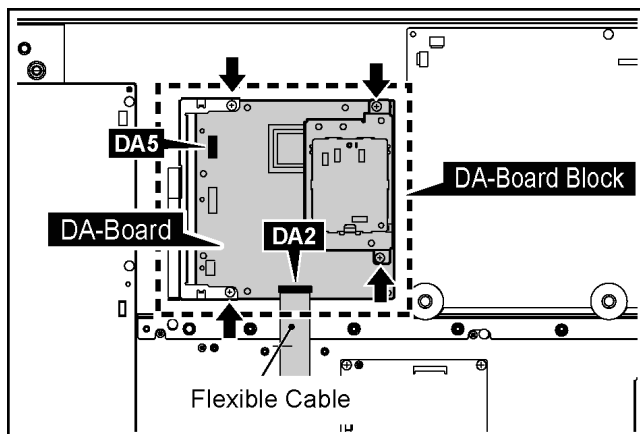

11. Disconnect the couplers(P2, P9, P11, P12, P23, P25).
12. Remove the 6 screws (⬆) and then remove the P-Board.
13. Remove the 5 screws (⬆) and then remove the AC-Inlet Block and the clammer.

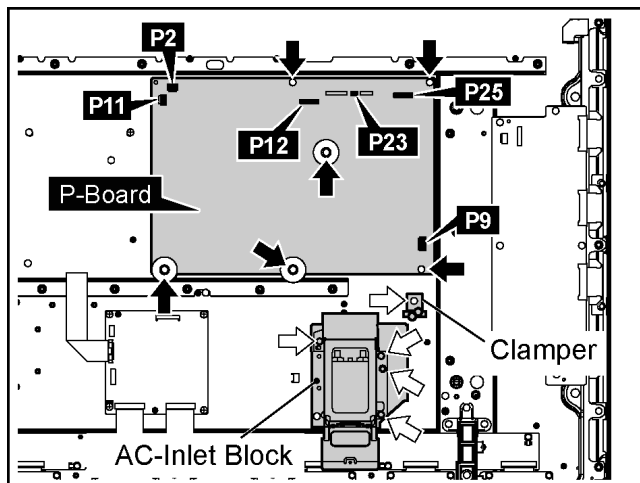


14. Disconnect the coupler(D20).
15. Remove the Flexible Cable from the couplers(D31, D32).
16. Remove the 4 screws and then remove the D-Board.

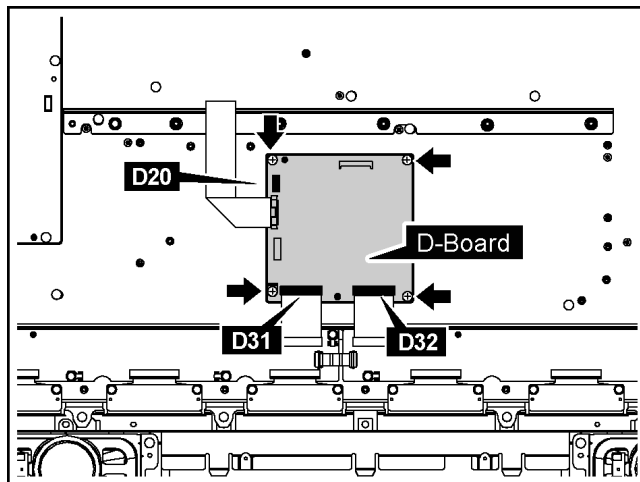


17. Remove the SU-Board and the SD-Board.
(Reference to Removal of the SU-Board and the SD-Board)


18. Remove the 7 screws (⬆) and then remove the SC-Board and the clammer.
19. Remove the 2 screws (⬆) and then remove the Plate.

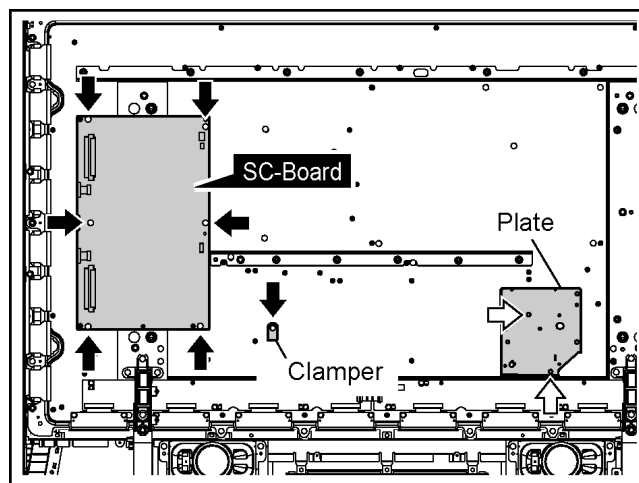

20. Disconnect the couplers(SS23, SS34).
21. Remove the Flexible Cable from the couplers(SS41, SS42, SS43, SS44).
22. Remove the 6 screws (⬆) and then remove the SS-Board.
23. Remove the 1 screw (⬆) and then remove the Ferrite Core.

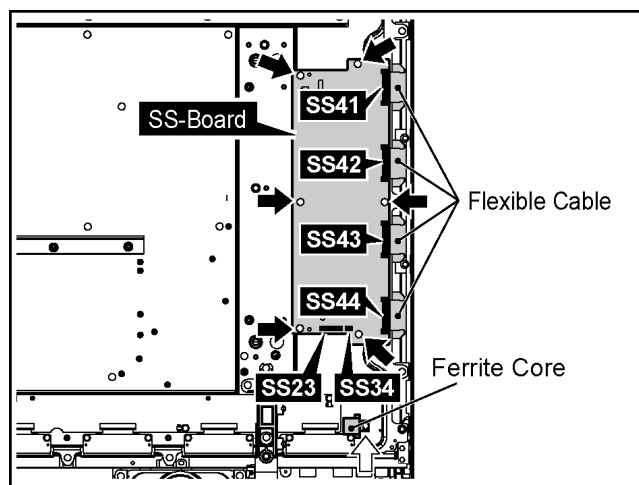


24. Remove the 8 screws (⬆) and then remove the Flexible Cable from the couplers(CB1, CB2, CB3, CB4, C12).
25. Remove the 4 screws (⬆) and then remove the C1-Board.

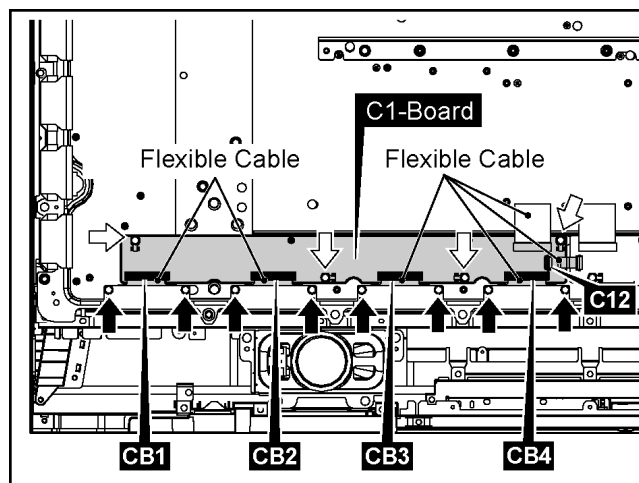


26. Remove the 8 screws (↑) and then remove the Flexible Cable from the couplers(CB5, CB6, CB7, CB8).

27. Remove the 4 screws (⇧) and then remove the C2-Board.

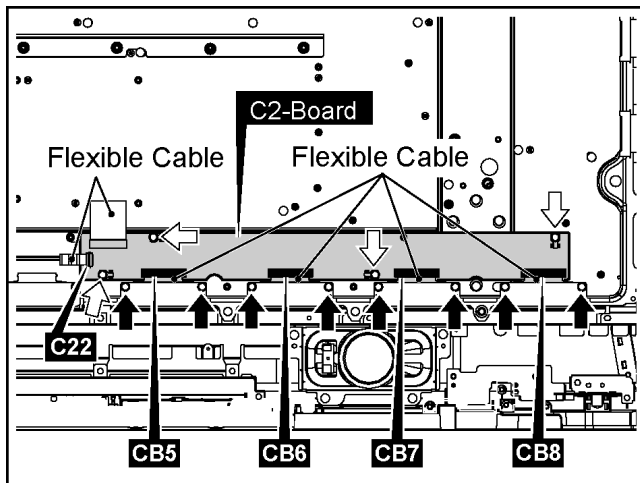

28. Lift up the bottom of the Plasma Panel in the direction of the arrow1 and pull the Plasma Panel in the direction of the arrow2 and then remove the Plasma Panel.

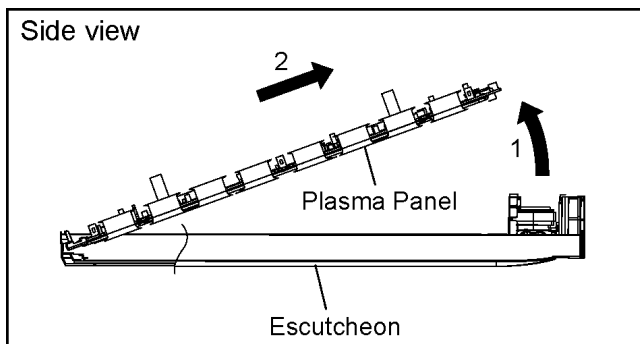

8 Location of Lead Wiring

8.1. Wiring for the 37 inch model


8.1.1. Location of Lead Wiring (1)

The lead wiring is dressed as shown in figure.

The ferrite core is done as shown in figure and the installation and the lead wiring are done.

Note: (1) It is the previous event as for the lead wiring of GK3-RELAY.

Processing of GK3-RELAY

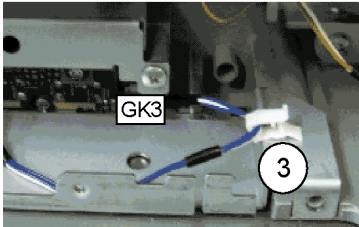

Clamp position

Connector No.	①	②	③
GK3 - RELAY			○
K1 - RELAY	○	Ⅲ	Ⅱ


Ⅱ The lead wire is passes through the clamber twice as shown in the figure below.



Ⅲ The lead wire is passes through the clamber three times as shown in the figure below.





Lead wiring and ferrite core installation of K1-RELAY.

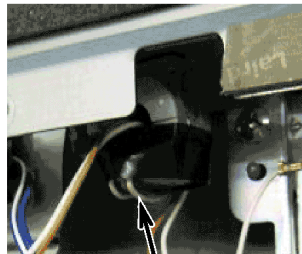

The ferrite core of the K1-RELAY lead is installed.

The ferrite core of the Speaker-RELAY lead is installed.

The dividing core is installed.

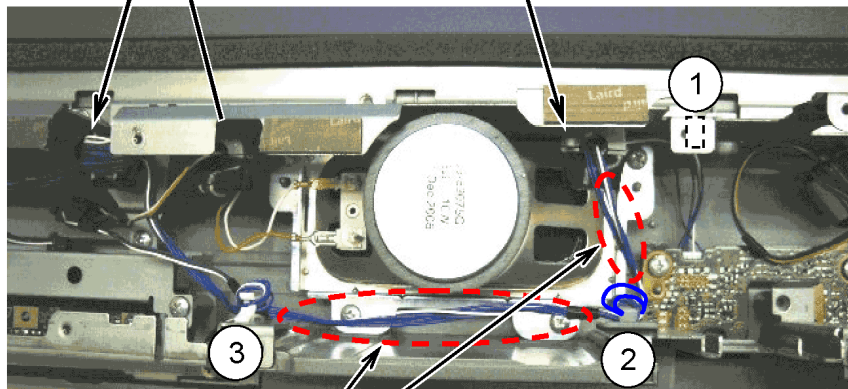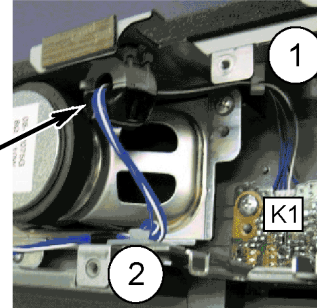

Note: Thing which does not slacken.
Thing not to place line between
Stand Bracket and Back Cover.

8.1.2. Location of Lead wiring (2)

The lead wiring is dressed as shown in figure.


1. After the D5-DA5 lead wire is connected, passes through the (7) clamber, and wires above.
2. After the D25-P25 lead wire is connected, passes through the (19) clamber twice, and wires above.
Connection part: D5 and D25 connector.

Note: (1) The D25-P25 lead wire pass the D20-SC20 lead wire bottom.


(2) Don't clamp the (7) clamber and the (19) clamber. (The lead is only passed.)

to P25

to DA5



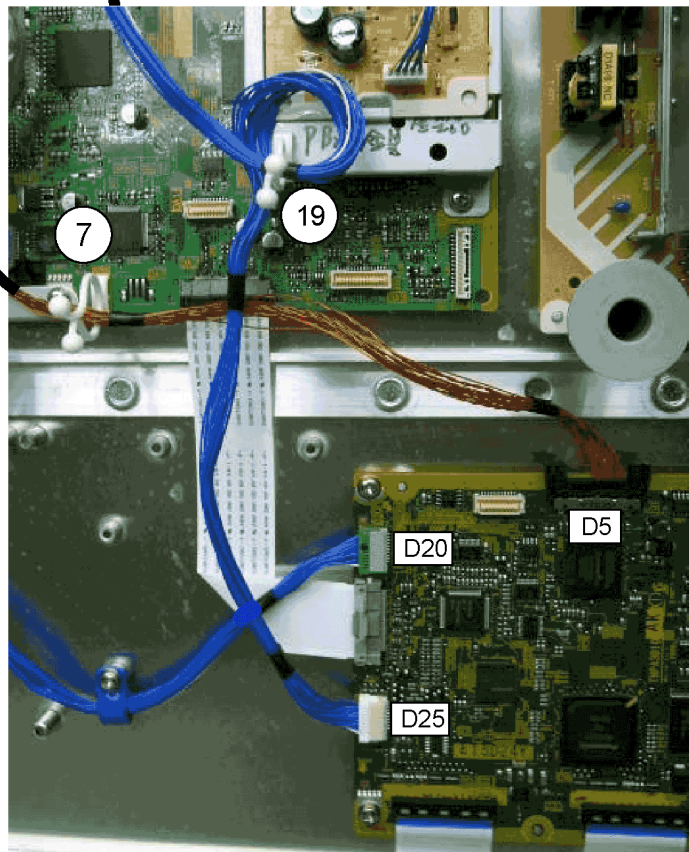


The lead wire is passes through the clamber twice.



8.1.3. Location of Lead wiring (3)

The lead wiring is dressed as shown in figure.

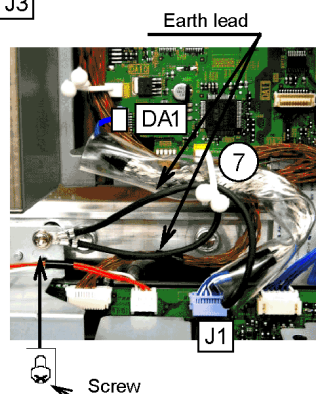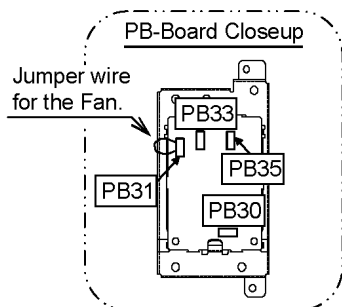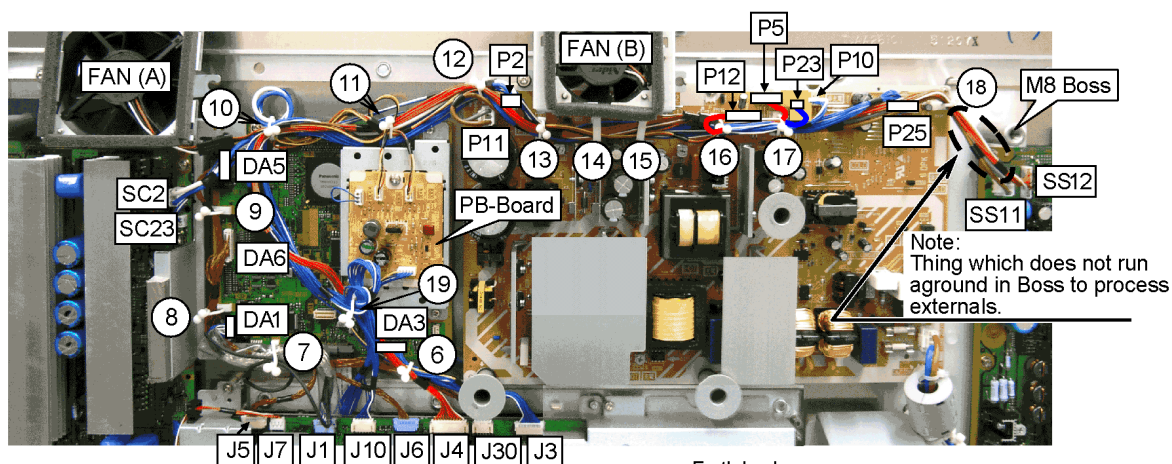


Note: With two earth leads thing to tighten both Slot Block.

Clamp position

CON.No - CON.No	⑥	⑦	⑧	⑨	⑩	⑪	⑫	⑬	⑭	⑮	⑯	⑰	⑱	⑲
SC2 - P2					⑩	○	○							
SC23 - P23					⑩	○	○	○	○	○	○	○		
SS12 - P12							○	○	○	○	○	○	○	
SS11 - P11							○	○	○	○	○	○	○	
P25 - D25					○	○	○	○	○	○	○	○	○	○
P10 - J10					○	○	○	○	○	○	○	○	○	⑩
P5 - J4	○				○	○	○	○	○	○	○	○	○	○
DA5 - D5	○													
DA6 - J5		○	○	○										
DA6 - J6			○	○										
DA9 - J1		○												
DA1 - earth lead		○												
J1 - earth lead		○												
DA3 - J3	○													
J30 - PB30	○													○
FAN(A) - PB33					○	○								
FAN(B) - PB35					⑩	○	○	○	②	○				

Note:
Connect the jumper wire for the Fan with the connector (PB31).


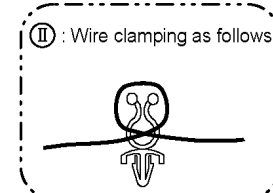


Note:
The lead wire is passes through the clamber twice.

8.1.4. Location of Lead Wiring (4)

The lead wiring is dressed as shown in figure.

The lead wiring, the ferrite core installation, and the relay connection are done as shown in figure.

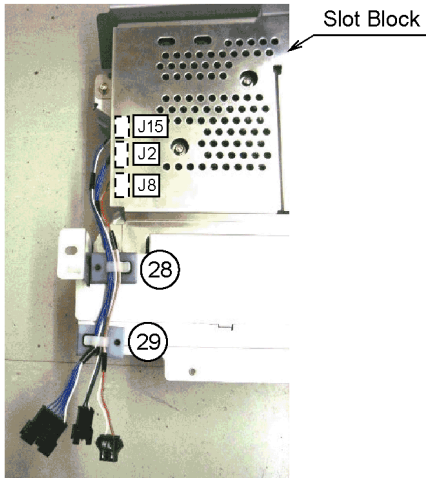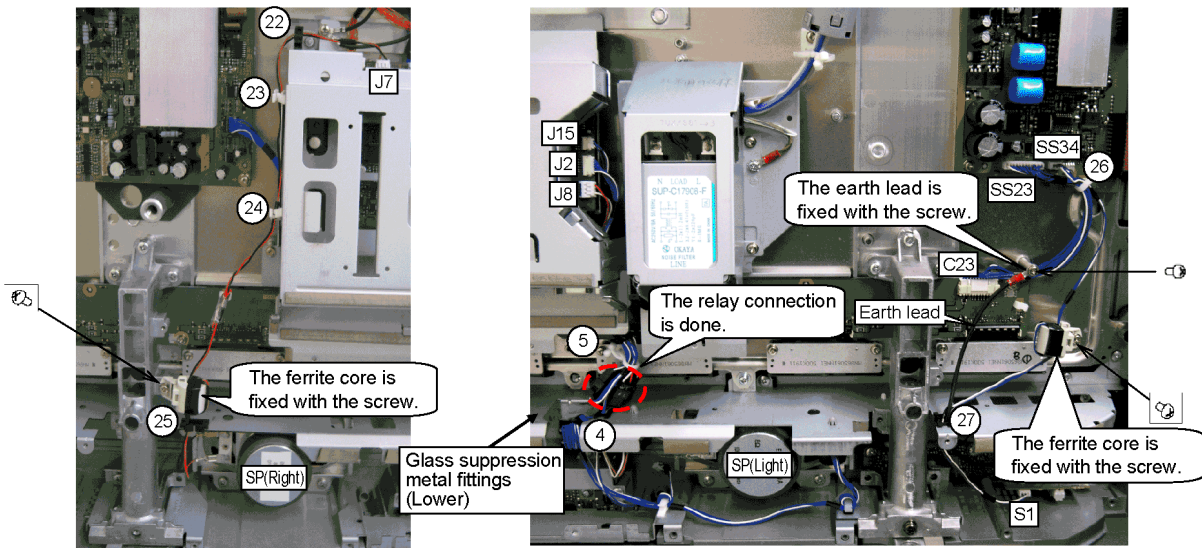

Clamp position

CON.No - CON.No	④	⑤	②	③	④	⑤	⑥	⑦	⑧	⑨
J7 - SP(Right)			○	○	○					
J15・RELAY - GK3・RELAY	○	○							○	○
J2・RELAY - K1・RELAY	○	⑩							○	○
J8・RELAY - SP(Left)・RELAY	○	○							○	○
SS23 - C23							○			
SS34 - S1							○	○		
Earth lead								○		

⑩ : Wire clamping as follows

8.2. Wiring for the 42 inch model

8.2.1. Location of Lead Wiring (1)


The lead wiring is dressed as shown in figure.

The ferrite core is done as shown in figure and the installation and the lead wiring are done.

Note: (1) It is the previous event as for the lead wiring of GK3-RELAY.

(2) Then direction of the installation of the ferrite core is noted.

Processing of GK3-RELAY

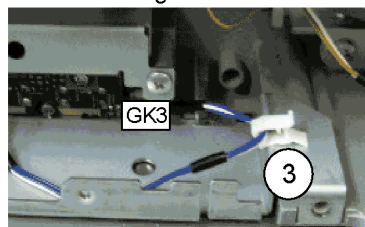


Clamp position

Connector No.	①	②	③
GK3 - RELAY			○
K1 - RELAY	○	Ⅱ	Ⅱ

Ⅱ The lead wire is passes through the clamber twice as shown in the figure below.




Lead wiring and ferrite core installation of K1-RELAY.

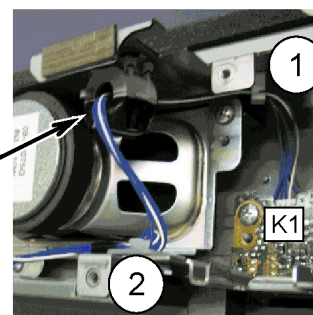

The ferrite core of the K1-RELAY lead is installed.

The ferrite core of the Speaker-RELAY lead is installed.

The dividing core is installed.

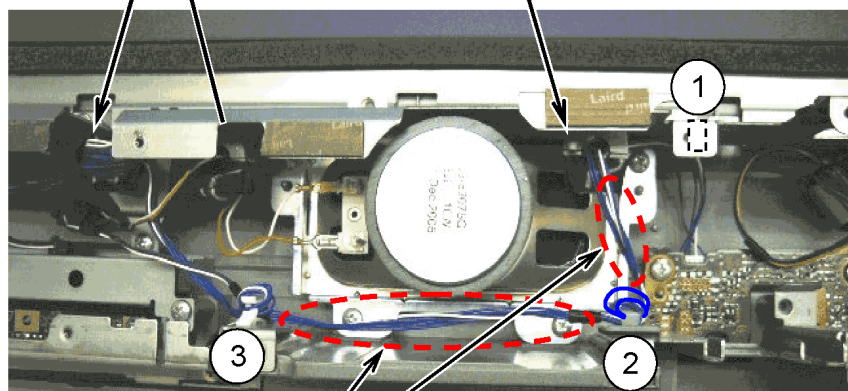

Note: Thing which does not slacken.
Thing not to place line between Stand Bracket and Back Cover.


8.2.2. Location of Lead wiring (2)

The lead wiring is dressed as shown in figure.


1. After the D5-DA5 lead wire is connected, passes through the ⑦ clamber, and wires above.
2. After the D25-P25 lead wire are connected, passes through the ②① clamber twice, and wires above.
Connection part: D5 and D25 connector.

Note: (1) The D25-P25 lead wire should pass the D20-SC20 lead wire bottom.

(2) Don't clamp the ⑦ clamber and the ②① clamber. (The lead is only passed.)



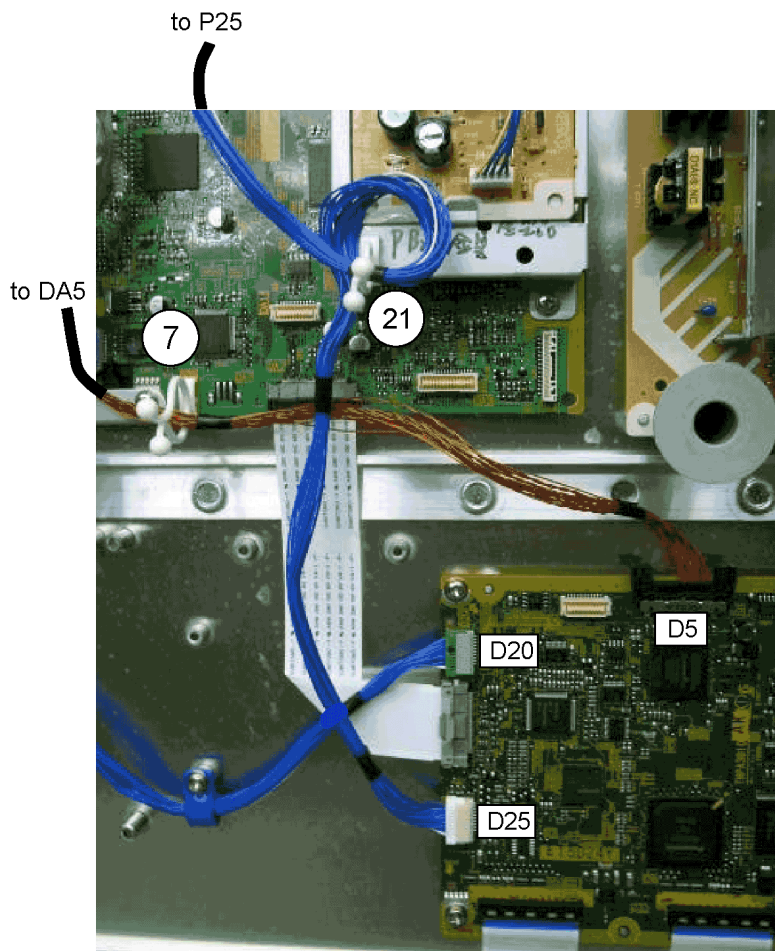


The lead wire is passes through the clamber twice.



8.2.3. Location of Lead wiring (3)

The lead wiring is dressed as shown in figure.

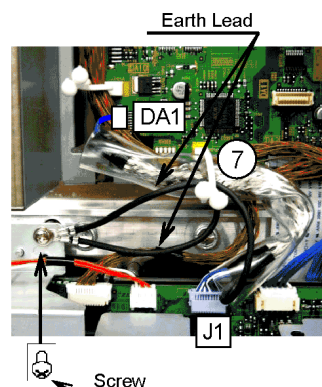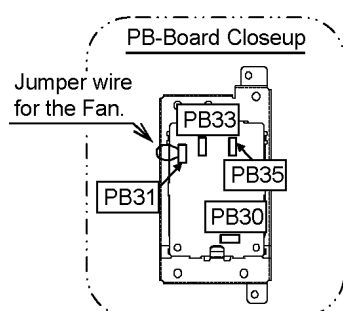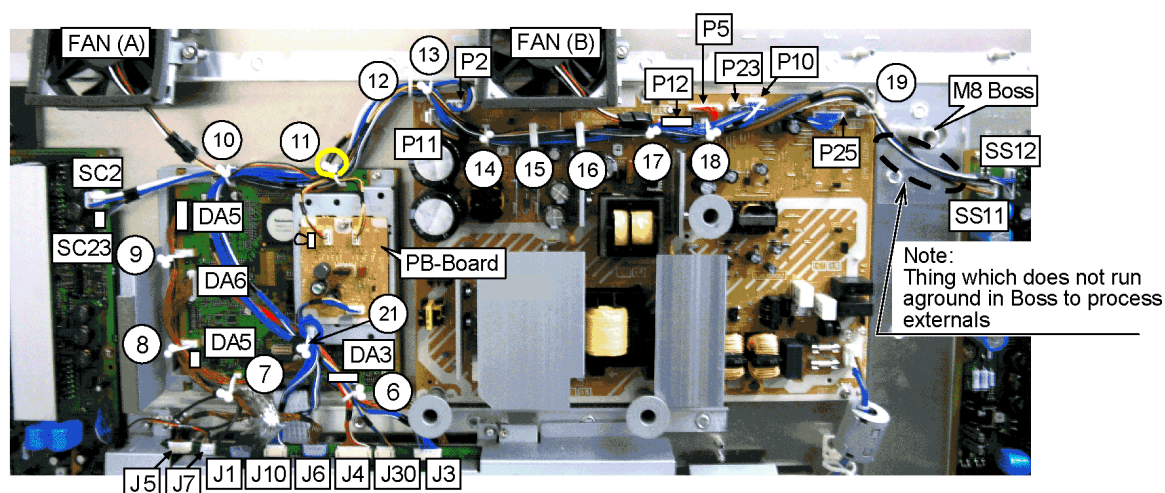


Note: With two earth leads thing to tighten both Slot Block.

Clamp position

CON.No - CON.No	⑥	⑦	⑧	⑨	⑩	⑪	⑫	⑬	⑭	⑮	⑯	⑰	⑱	⑲	⑳	㉑
SC2 - P2					○	○	○	○								
SC23 - P23					○	○	○	○	○	○	○	○	○	○		
SS12 - P12														○	○	
SS11 - P11									○	○	○	○	○	○	○	
P25 - D25					○	○	○	○	○	○	○	○	○	○	○	○
P10 - J10					○	○	○	○	○	○	○	○	○	○	○	○
P5 - J4	○				○	○	○	○	○	○	○	○	○	○		○
DA5 - D5	○	○	○	○												
DA6 - J5		○	○													
DA6 - J6		○	○													
DA9 - J1		○														
DA1 - earth lead		○														
J1 - earth lead		○														
DA3 - J3	○															
J30 - PB30	○															○
FAN(A) - PB33					○	○										
FAN(B) - PB35						⑩	○	○	○	○	○	○	○			



Note:
Connect the jumper wire for the Fan with the connector (PB31).

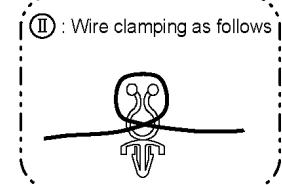

8.2.4. Location of Lead Wiring (4)

The lead wiring is dressed as shown in figure.

The lead wiring, the ferrite core installation, and the relay connection are done as shown in figure.

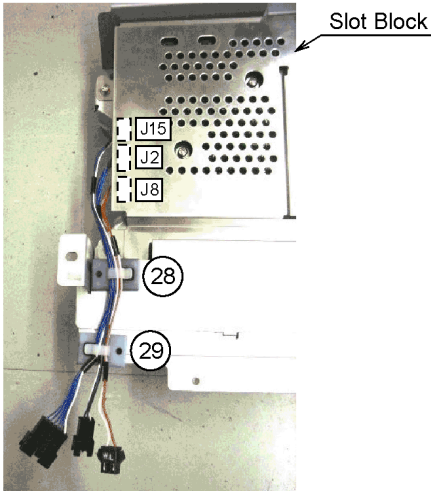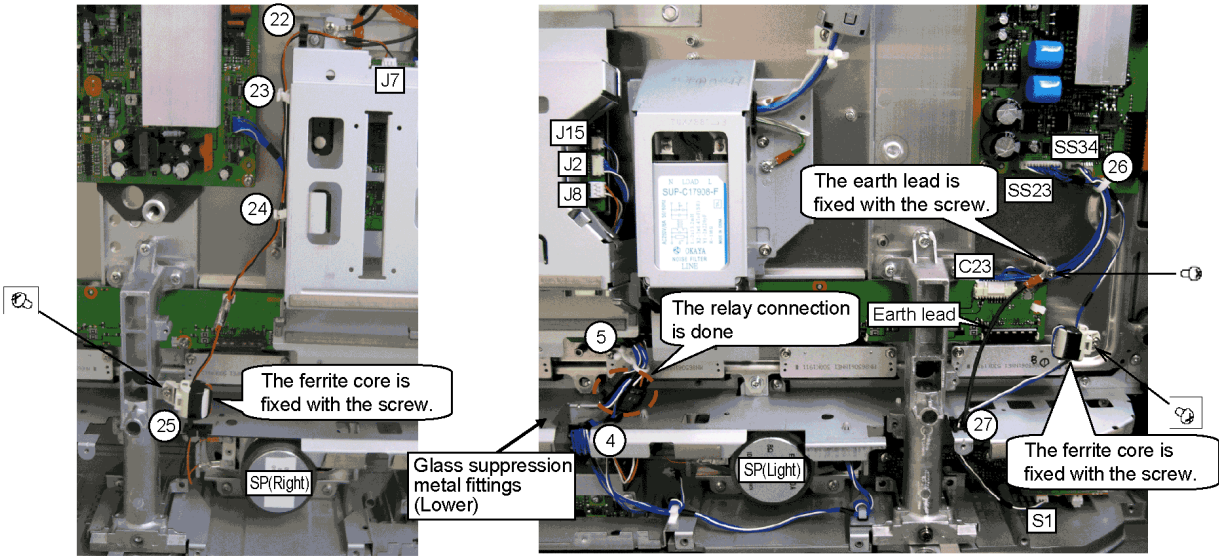

Clamp position

CON:No - CON:No	④	⑤	②	③	④	⑤	⑥	⑦	⑧	⑨
J7 - SP(Right)			○	○	○	○				
J15 · RELAY - GK3 · RELAY	○	○							○	○
J2 · RELAY - K1 · RELAY	○	Ⅱ							○	○
J8 · RELAY - SP(Left) · RELAY	○	○							○	○
SS23 - C23							○			
SS34 - S1							○	○		
Earth lead							○			

Ⅱ : Wire clamping as follows

9 Adjustment Procedure

9.1. Driver Set-up

9.1.1. Item / Preparation

1. Input a white signal to plasma video input.

Aging pattern: 0

2. Set the picture controls as follows.

Picture menu: Standard

Picture: +25

Aspect: Full

Caution

1. First perform Vsus adjustment.
2. Confirmation of Vscn voltage should be performed after confirmation of Vad adjustment.

When Vad=-105V, Voltage of Vscn is 35V \pm 4V.

9.1.2. Adjustments

Adjust driver section voltages referring the panel data on the panel data label.

Check or adjust the following voltages with the multimeter.

Name	Test Point	Voltage	Volume	Remarks
Vsus	TPVSUS (SS)	Vsus \pm 2V	R628 (P)	*
Ve	TPVE (SS)	Ve \pm 1V	VR6000 (SS)	*
Vset	TPVSET (SC)	260V \pm 7V	Fixed	
Vad	TPVAD (SC)	-105V \pm 1V	VR6600 (SC)	
Vscn	TPVSCN (SC)	Vad+140V \pm 4V	Fixed	
Vda	TPVDA (SS)	75V \pm 1V	Fixed	
Vdat	P12-1, 5 (P)	75.5V \pm 0.1V	R665 (P)	
PFC	C446 (+)(-)	396V \pm 0.5V	R443 (P)	

*See the Panel label.

Panel Label information


The diagram shows a rectangular panel label with a double border. Inside, there is a small square icon with the letter 'M' in the top left corner. Below it are two empty rectangular boxes. Further down is the text 'Serial No.' followed by a dashed rectangular box. Below that is the text 'Ve: [] v, Vsus: [] v', where the brackets are small empty boxes. At the bottom left is the text 'MADE IN JAPAN' and at the bottom right is a small square icon with the letters 'TQF' inside. To the right of the label, there is a rectangular box containing the text 'Adjustment voltage' with an arrow pointing to the 'Vsus' field on the label.

9.2. Initialization Pulse Adjust

1. Input the White signal to plasma video input.
2. Set the picture controls as follows.
Picture menu: Standard
Picture: +25
Aspect: Full
3. Connect Oscilloscope to TPSC1 (T2) and adjust VR6602 for $195 \pm 10 \mu\text{Sec}$.

	Test point	Volume	Level
T2	TPSC1 (SC)	VR6602 (SC)	$195 \pm 10 \mu\text{Sec}$.

TPSC1

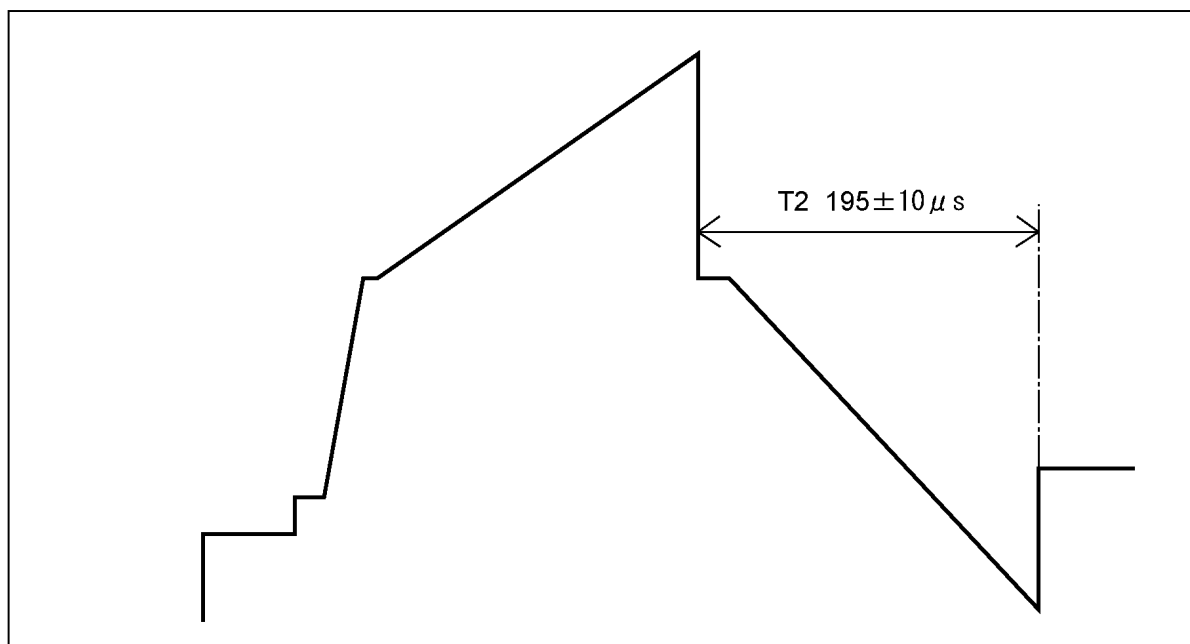

9.3. P.C.B. (Printed Circuit Board) exchange

9.3.1. Caution

1. To remove P.C.B., wait 1 minute after power was off for discharge from electrolysis capacitors.

9.3.2. Quick adjustment after P.C.B. exchange

Adjust the following voltages with the multimeter.

P.C.B.	Name	Test Point	Voltage	Volume	Remarks
P Board	Vsus	TPVSUS (SS)	$V_{\text{sus}} \pm 2\text{V}$	R628 (P)	*
	Vdat	P12-1, 5 (P)	$75.5\text{V} \pm 0.1\text{V}$	R665 (P)	
	PFC	C446 (+) (-) (P)	$396\text{V} \pm 0.5\text{V}$	R443 (P)	
SC Board	Vad	TPVAD (SC)	$-105\text{V} \pm 1\text{V}$	VR6600 (SC)	
SS Board	Ve	TPVE (SS)	$V_e \pm 1\text{V}$	VR6000 (SS)	*
D, J, DA Board	White balance, Pedestal and Sub brightness for NTSC, PAL, HD, PC and 625i signals				
DA Board	Set Market Select Number to correct destination by MS mode. (See chap. 10.1.4)				


*See the Panel label.

Caution:

Absolutely do not reduce V_{sus} below V_e not to damage the P.C.B.


9.4. Adjustment Volume Location

9.4.1. TH-37PR9U

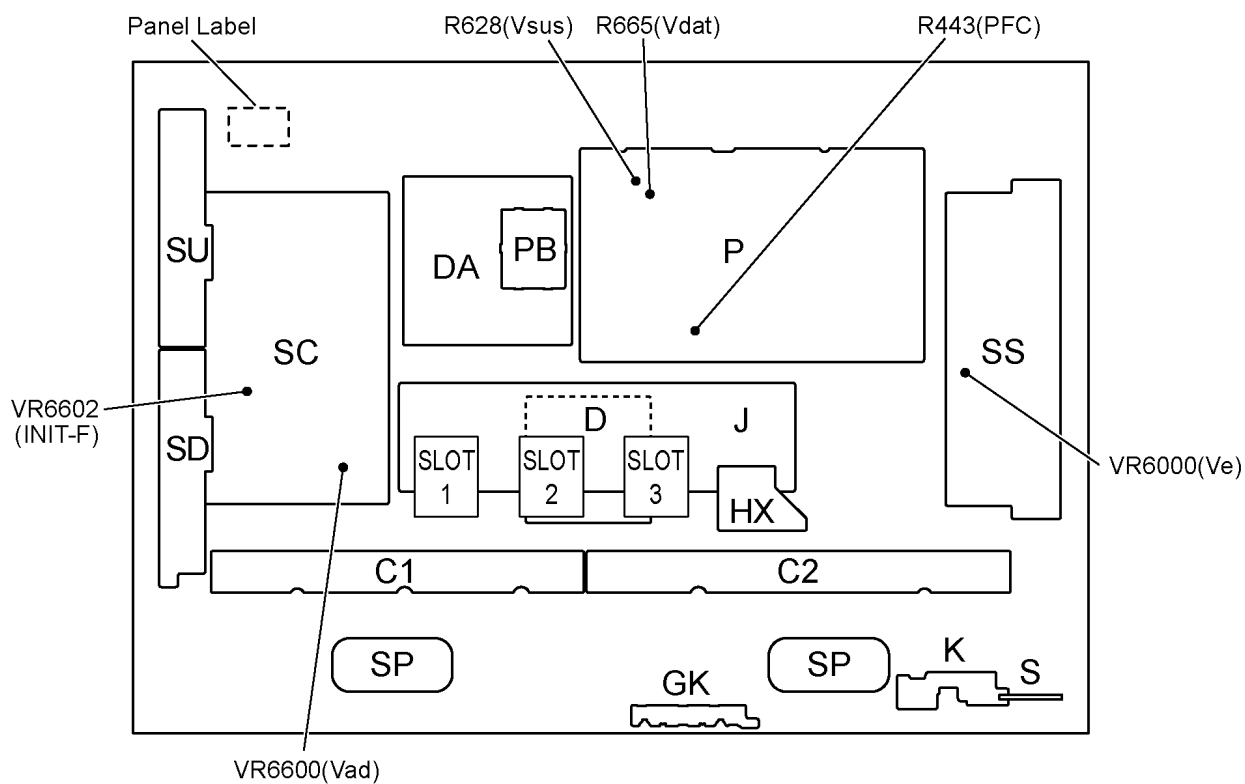

P.C. Boards Location


9.4.2. TH-42PR9U

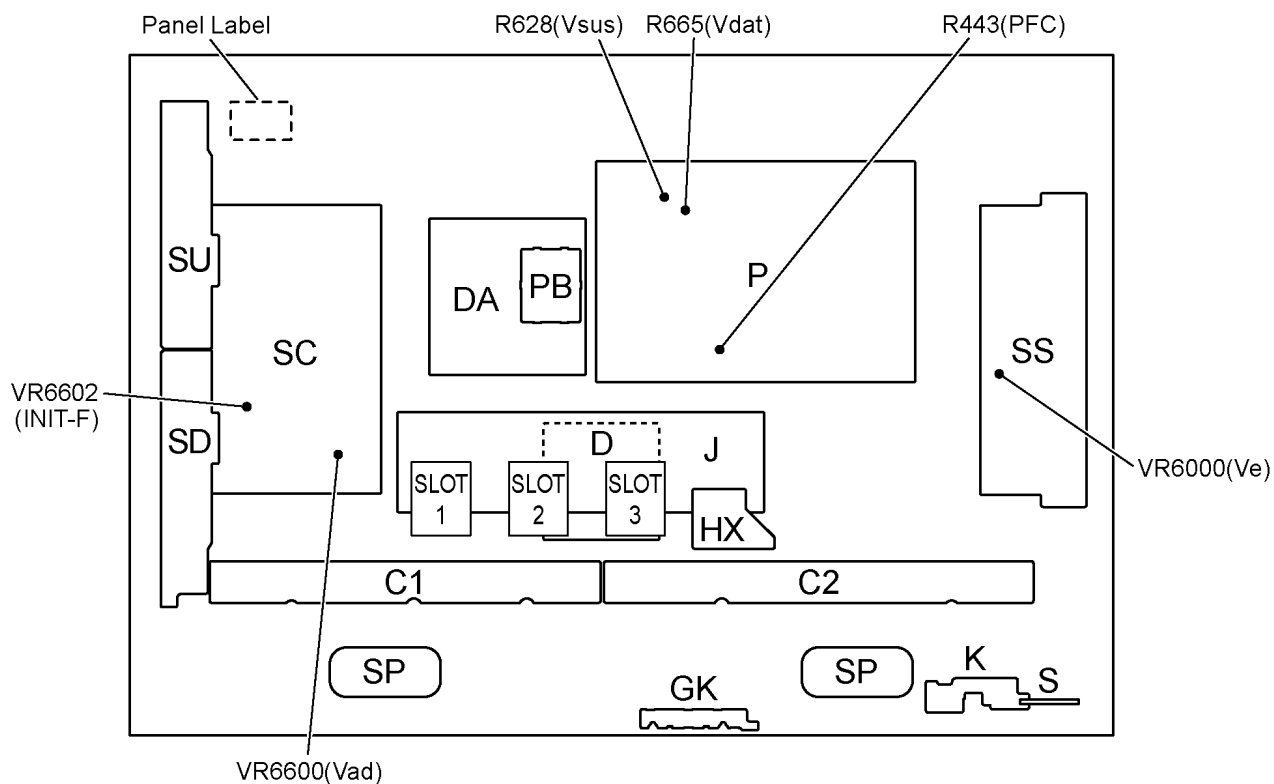


P.C. Boards Location

9.5. Test Point Location

9.5.1. TH-37PR9U

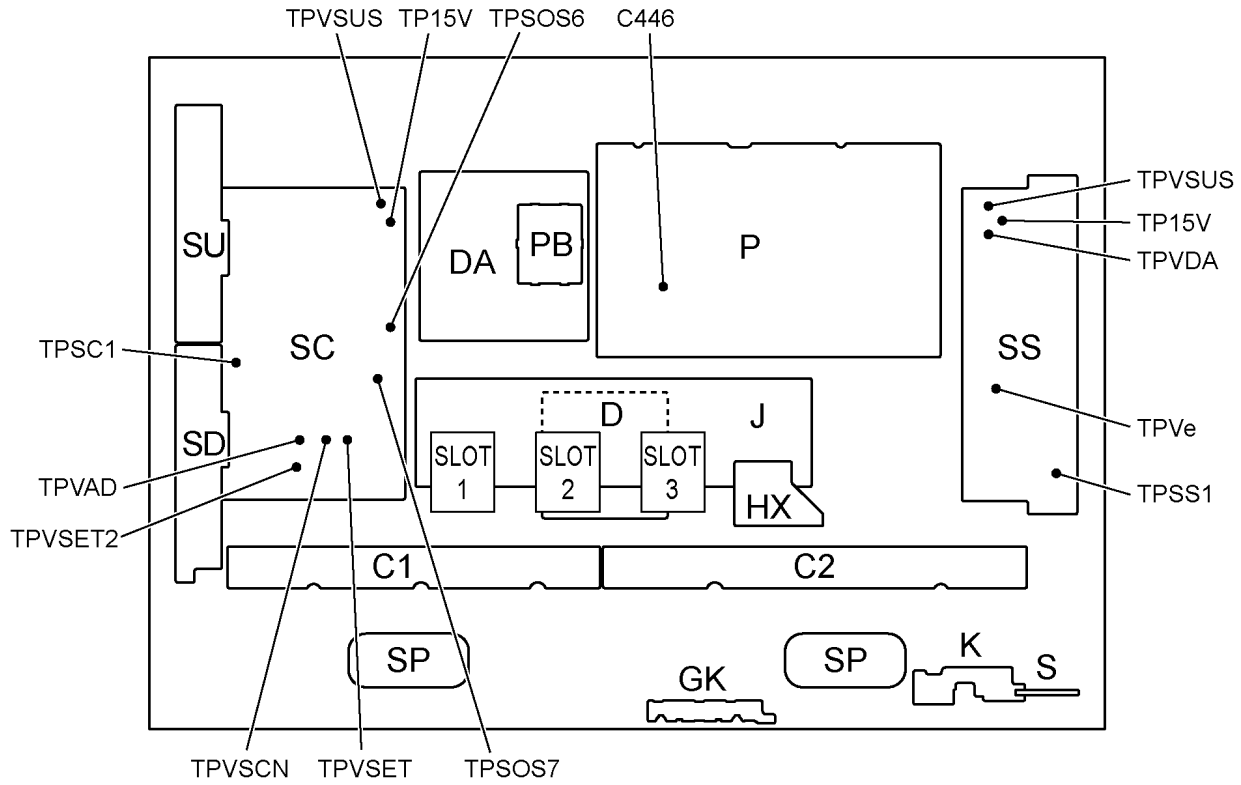

9.5.2. TH-42PR9U

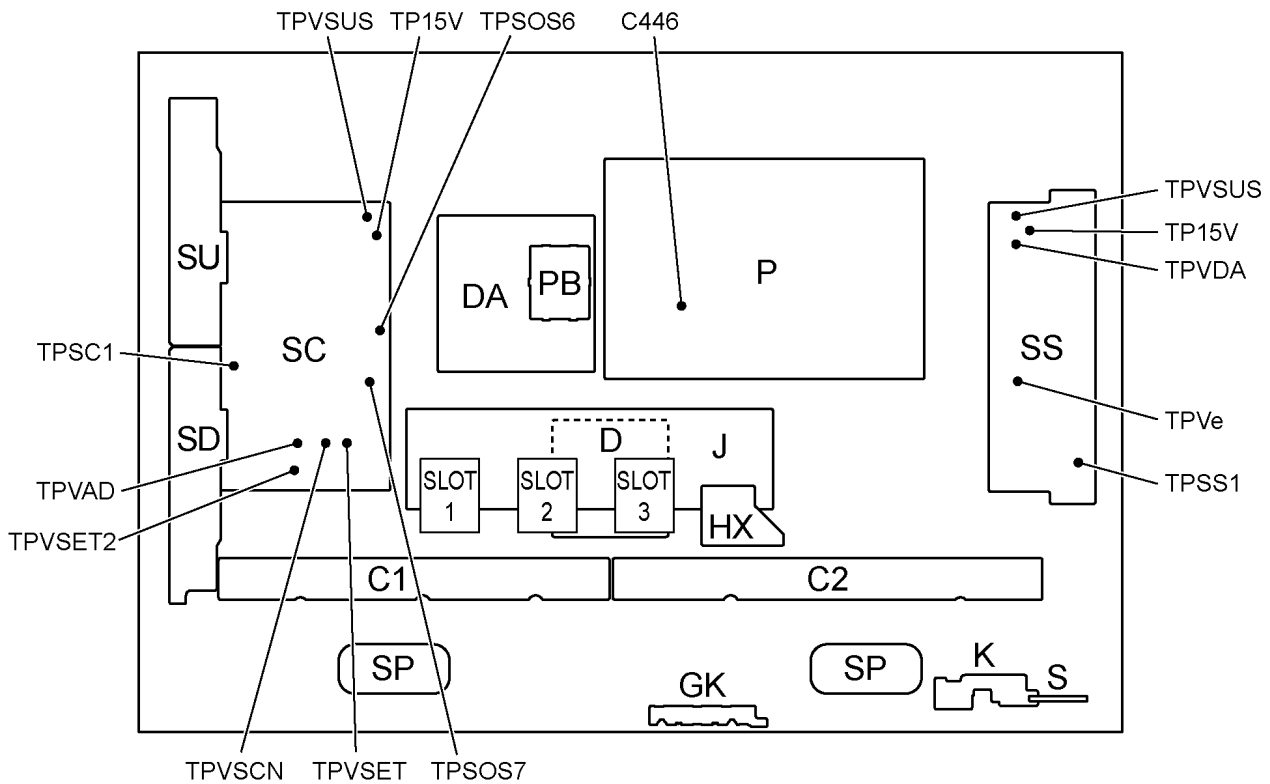

10 Service mode


10.1. CAT (computer Aided Test) mode

CAT mode menu

CAT panel sys. 8. 2		
IIC Mode	←	
CD Mode	←	
SD Mode	←	
MS Mode	←	
ID Mode	←	

Mode	Function	Access button
IIC	Service Alignment	Action
CD(Complete Diagnostics)	Software version information EEPROM edit	Mute more than 5 seconds
SD(Status Display)	MTBF parameter	Action
MS Mode	Market Select	Mute more than 5 seconds
ID Mode	LSI Check	Mute more than 5 seconds

Remote control

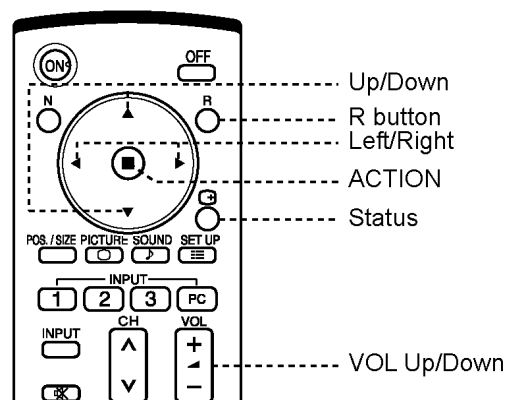

How to access the CAT mode.


Press and the hold the **Volume down / - button** on the front panel of the unit and press the **status button** on the remote control 3 times quickly within 2 seconds, this will place the unit into the CAT mode.

To exit the **CAT mode**, access the **ID mode** and switch off the main power.

10.1.1. IIC mode

Select the IIC mode by **Up/Down button** on the remote control at the front page of CAT mode and then press the **Action button** on the remote control.

OSD

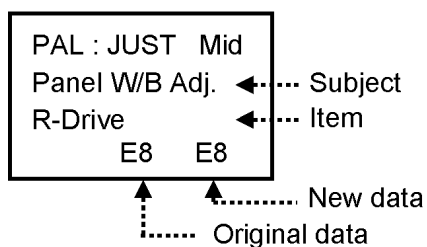

How to use the IIC mode.

1. Select the alignment **Subject** by **Up/Down buttons** on the remote control.
2. Select the alignment **Item** by **Left/Right buttons** on the remote control.
3. Adjust **optimum setting** by **Volume Up/Down buttons** on the remote control.
4. The **data is memorized** when press the **R button** on the remote control or change the alignment Subject (or Items).

Subject and item are mentioned on "IIC mode structure".

To exit the IIC mode, press the **R button** on the remote control.

10.1.2. CD mode

Select the CD mode by **Up/Down button** on the remote control at the front page of CAT mode and then press the **Mute button** on the remote control more than 5 seconds.

CD	
MONITOR-MCU	PM0. 3000S9 OK
MONITOR-EEPROM DA	0. 20 1 86 66
MONITOR-EEPROM H	— — — —
MONITOR-FPGA	200
MONITOR-EEPROM Change Addr	00 01
Data	01 01
PANEL-MCU	1 08
PANEL-EEPROM	10 01
PANEL-FPGA	11 00
PANEL-PDROM	10 09
PTCT	00. 00. 00. 00. 00.

..... Factory use
 --- New data
 SOS history
 Original data

Micom software version (IC9702), this version can be upgrade by

1. replace of new version IC
2. Loading the new version software from loader tool, TZSC07036.

Memory data change

Address Change by **Up/Down buttons** on the remote control.
 ↑
 Change by **Left/Right buttons** on the remote control.
 Data Change by **VOL Up/Down buttons** on the remote control.

The data is memorized when switch off the main power.

To exit the CD mode, press the **R button** on the remote control.

10.1.3. SD mode

Select the SD mode by **Up/Down button** on the remote control at the front page of CAT mode and then press the **Action button** on the remote control.

OSD


SD	
Input command	66 66 39 FF 27 24 24
check	24 24 24 24 24 66 66
	66 66 66 66 66 66
MTBF Parameter	WT <input type="text" value="19"/> PT <input type="text" value="6"/>
Remote Control Mode	<input type="text" value="A"/> <input type="text" value="B"/>

..... History of remote control command. (Factory use).
 Cumulative Time for power on condition. (unit :hour)
 Counter of power on. (unit :time)

To exit the SD mode, press the **R button** on the remote control.

10.1.4. MS mode

Select the MS mode by **Up/Down button** on the remote control at the front page of CAT mode and then press the **Mute button** on the remote control more than 5 seconds.

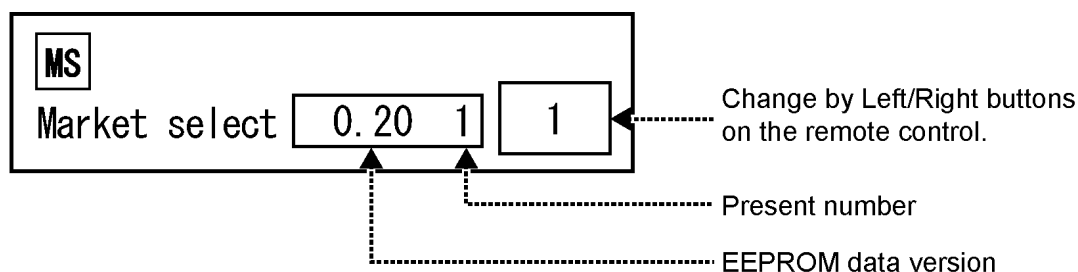

To exit the MS mode, press the **R button** on the remote control.

Caution:

Market Select should be set after exchange of DA-Board.

Destination number

Number	Destination	Number	Destination
0	Japan	14	Thailand (Hotel)
1	North America	15	--
2	Europe	16	Mexico
3	Others	17	Mexico (Hotel)
4	Britain	18	China
5	Taiwan	19	China (Hotel)
6	Thailand	20	--
7	--	21	--
8	Japan (Hotel)	22	--
9	North America (Hotel)	23	--
10	Europe (Hotel)	24	--
11	Others (Hotel)	25	--
12	Britain (Hotel)	26	--

Default setting

Number	Destination
1	North America

10.1.5. ID mode

Select the ID mode by **Up/Down button** on the remote control at the front page of CAT mode and then press the **Mute button** on the remote control more than 5 seconds.

ID

IIC1 ☐

IIC2 ☒

IIC3 ☒

IIC4 ☐

DA

IC4703	OK H90
IC4001	OK H61
IC4201	OK H56
IC4501	OK H53


D PANEL OK

J

IC8181	OK H51
IC3001	OK H22
IC3003	OK H63
IC3004	OK H64
IC3005	OK H65
IC2303	OK H21

To exit the ID mode, press the **R button** on the remote control.

10.2. IIC mode structure (following items value is sample data.)

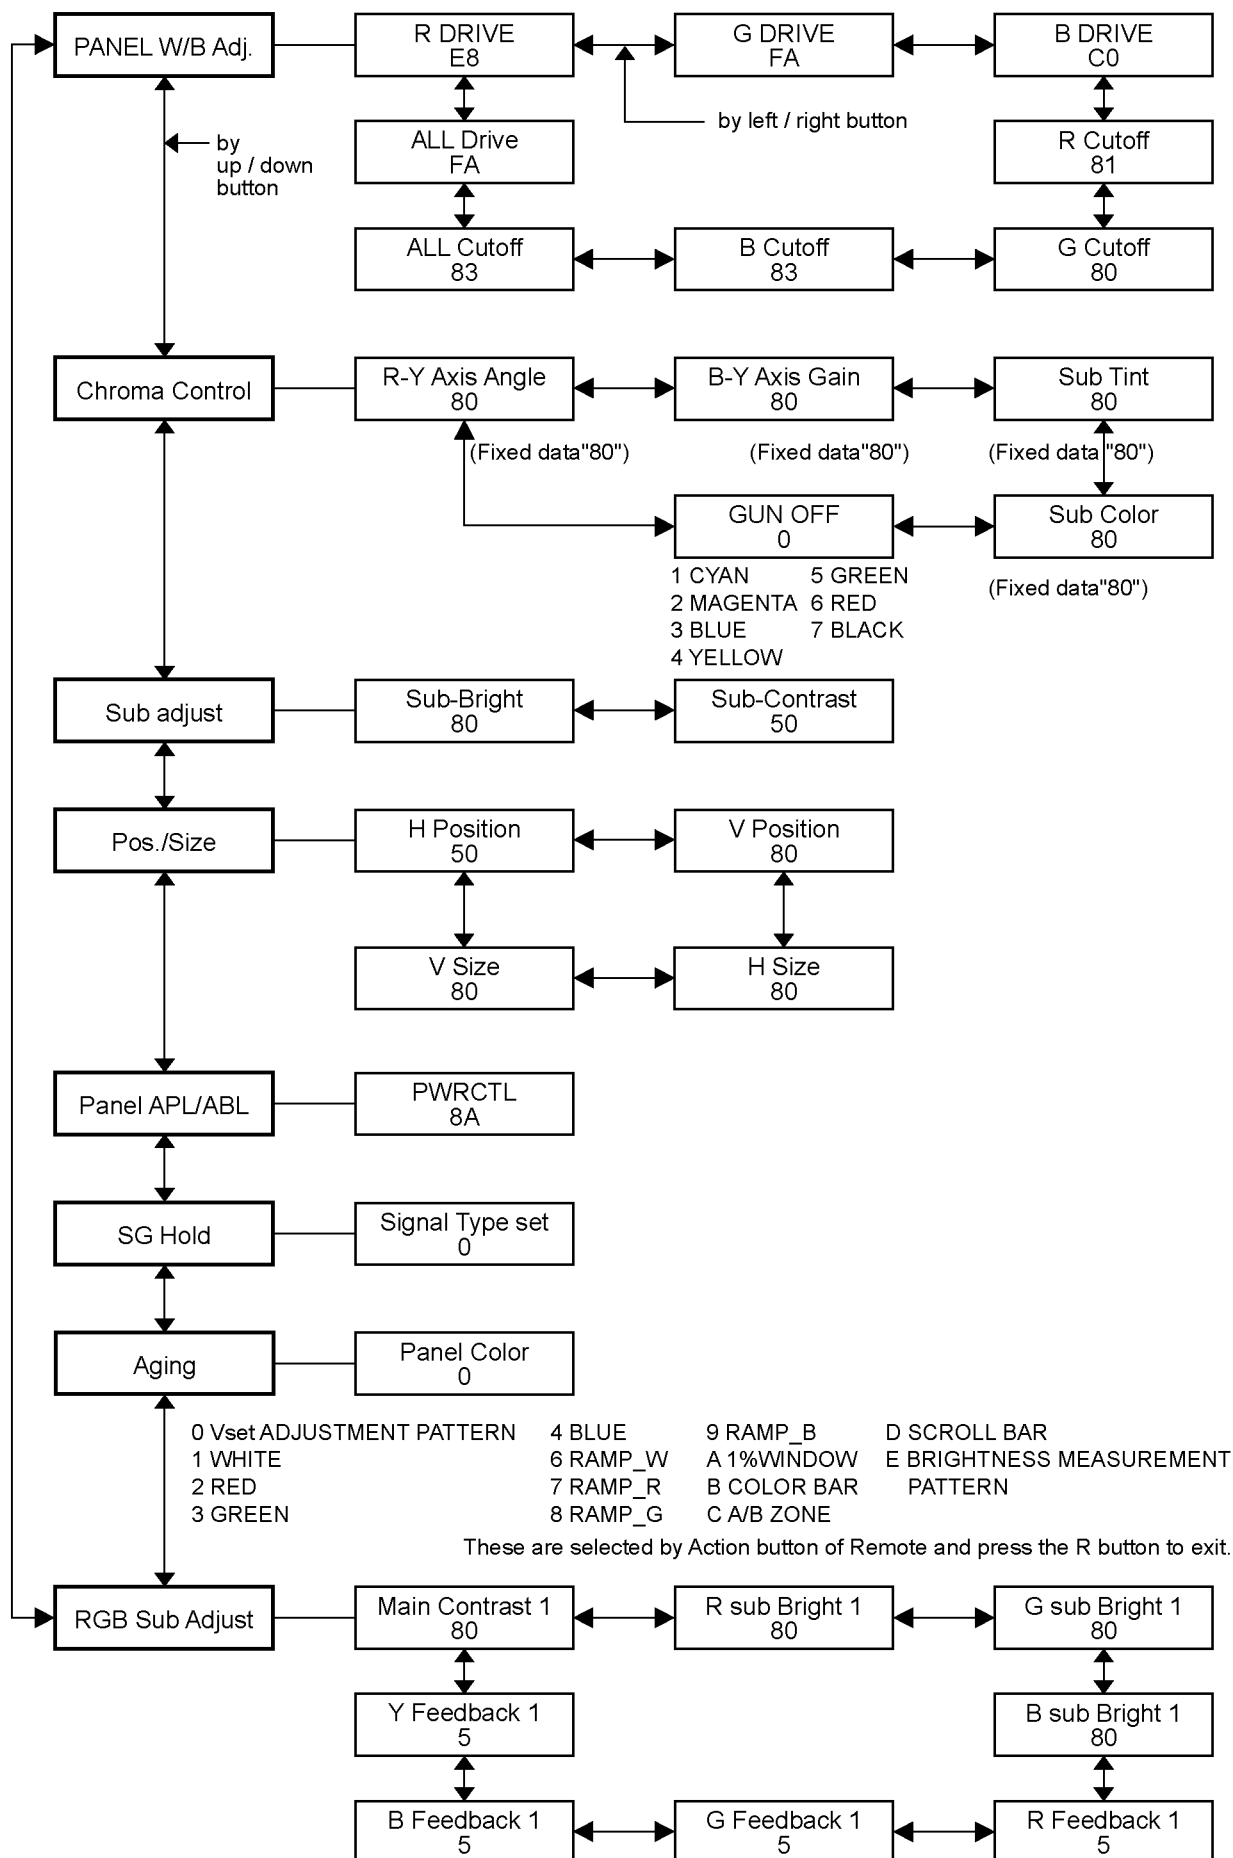

11 Adjustment

11.1. RGB white balance adjustment


Instrument Name	Connection	Remarks												
<ul style="list-style-type: none"> RGB VGA W/B pattern Color analyzer (Minolta CA-100 or equivalent) 	PC input Panel surface	User setting: Normal (Picture menu: Standard)												
Procedure		Remarks												
<ul style="list-style-type: none"> Ensure aging is adequate. Make sure the front panel to be used on the final set is fitted. Make sure a color signal is not being shown before adjustment. Put the color analyzer where there is little color variation. <ol style="list-style-type: none"> Set COMPONENT/RGB-IN SELECT to RGB. Select the IIC mode "PANEL W/B Adj." item. Check that the color temperature is "COOL (High)". Output a white balance pattern. Touch the signal receiver of color analyzer to the highlight window's center. Fix G drive at E0h and adjust B drive and R drive so x, y become the "Color temperature High" in the below table. Increase R/G/B together so the maximum drive value in R/G/B becomes FCh. Set color temperature to "NORMAL (Medium)". Fix G drive at E0h and adjust B drive and R drive so the highlight window's x, y becomes the "Color temperature Medium" in the below table. Increase R/G/B together so the maximum drive value in R/G/B becomes FCh. Set color temperature to "WARM(Low)". Set G drive to E0h and adjust B drive and R drive so the highlight window's x, y become the "Color temperature Low" shown in the below table. Increase R/G/B together so the maximum drive value in R/G/B becomes FCh. Copy the R drive, G drive and B drive data in NTSC, PAL DVI region. <p>Table 1 W/B adjustment values</p> <table border="1"> <thead> <tr> <th>Color temperature</th><th>x</th><th>y</th></tr> </thead> <tbody> <tr> <td>High</td><td>0.276</td><td>0.276</td></tr> <tr> <td>Medium</td><td>0.288</td><td>0.296</td></tr> <tr> <td>Low</td><td>0.313</td><td>0.329</td></tr> </tbody> </table> <p>Adjustment target</p> <p>Hi-light: $x \pm 0.003$ $y \pm 0.003$</p> <p>Hi-light is target of the number at drive adjustment in the hi-light windows.</p> <p>Therefore, it is not target of the hi-light number at after adjustment white balance.</p>		Color temperature	x	y	High	0.276	0.276	Medium	0.288	0.296	Low	0.313	0.329	Picture Menu: Standard Picture: 25 Aspect: Full Position and size: Normal <ul style="list-style-type: none"> Highlight section Signal amplitude 75% <p>RGB VGA W/B Pattern</p>  <ul style="list-style-type: none"> Cutoff standard G: 80h Drive standard G: E0h
Color temperature	x	y												
High	0.276	0.276												
Medium	0.288	0.296												
Low	0.313	0.329												

Table 2 Drive data addresses (PC/RGB)

Color temperature	R	G	B
High	A0-11AD	A0-11AE	A0-11AF
Medium	A0-11B0	A0-11B1	A0-11B2
Low	A0-11B3	A0-11B4	A0-11B5

Table 3 Drive data addresses (NTSC)

Color temperature	R	G	B
High	A0-1180	A0-1181	A0-1182
Medium	A0-1183	A0-1184	A0-1185
Low	A0-1186	A0-1187	A0-1188

Table 4 Drive data addresses (PAL)

Color temperature	R	G	B
High	A0-1189	A0-118A	A0-118B
Medium	A0-118C	A0-118D	A0-118E
Low	A0-118F	A0-1190	A0-1191

Table 5 Drive data addresses (DVI)

Color temperature	R	G	B
High	A0-11B6	A0-11B7	A0-11B8
Medium	A0-11B9	A0-11BA	A0-11BB
Low	A0-11BC	A0-11BD	A0-11BE

11.2. HD white balance adjustment


Instrument Name	Connection	Remarks												
<ul style="list-style-type: none"> HD W/B pattern (COMPONENT Output) Color analyzer (Minolta CA-100 or equivalent) 	PC input Panel surface	User setting: Normal (Picture menu: Standard)												
Procedure		Remarks												
<ul style="list-style-type: none"> Ensure aging is adequate. Make sure the front panel to be used on the final set is fitted. Make sure a color signal is not being shown before adjustment. Put the color analyzer where there is little color variation. <ol style="list-style-type: none"> Set COMPONENT/RGB-IN SELECT to COMPONENT Select the IIC mode "PANEL W/B Adj." item. Check that the color temperature is "COOL (High)". Output a white balance pattern. Touch the signal receiver of color analyzer to the highlight window's center. Fix G drive at E0h and adjust B drive and R drive so x, y become the "Color temperature High" in the below table. Increase R/G/B together so the maximum drive value in R/G/B becomes FCh. Set color temperature to "NORMAL (Medium)". Fix G drive at E0h and adjust B drive and R drive so the highlight window's x, y becomes the "Color temperature Medium" in the below table. Increase R/G/B together so the maximum drive value in R/G/B becomes FCh. Set color temperature to "WARM (Low)". Set G drive to E0h and adjust B drive and R drive so the highlight window's x, y become the "Color temperature Low" shown in the below table. Increase R/G/B together so the maximum drive value in R/G/B becomes FCh. Copy the R drive, G drive and B drive data in YUV1_525ip, YUV3_625ip region. <p>Table 6 W/B adjustment values</p> <table border="1"> <thead> <tr> <th>Color temperature</th><th>x</th><th>y</th></tr> </thead> <tbody> <tr> <td>High</td><td>0.276</td><td>0.276</td></tr> <tr> <td>Medium</td><td>0.288</td><td>0.296</td></tr> <tr> <td>Low</td><td>0.313</td><td>0.329</td></tr> </tbody> </table> <p>Adjustment target Hi-light: $x \pm 0.003$ $y \pm 0.003$ Hi-light is target of the number at drive adjustment in the hi-light windows. Therefore, it is not target of the hi-light number at after adjustment white balance.</p>		Color temperature	x	y	High	0.276	0.276	Medium	0.288	0.296	Low	0.313	0.329	Picture Menu: Standard Picture: 25 Aspect: Full Position and size: Normal <ul style="list-style-type: none"> Highlight section Signal amplitude 75% <div style="text-align: center;"> <p>HD W/B Pattern (COMPONENT Output)</p>  <p>High light 75% Low light 15%</p> </div> Cutoff standard G: 80h Drive standard G: E0h
Color temperature	x	y												
High	0.276	0.276												
Medium	0.288	0.296												
Low	0.313	0.329												

Table 7 Drive data addresses (YUV2_HD)

Color temperature	R	G	B
High	A0-119B	A0-119C	A0-119D
Medium	A0-119E	A0-119F	A0-11A0
Low	A0-11A1	A0-11A2	A0-11A3


Table 8 Drive data addresses (YUV1_525ip)

Color temperature	R	G	B
High	A0-1192	A0-1193	A0-1194
Medium	A0-1195	A0-1196	A0-1197
Low	A0-1198	A0-1199	A0-119A

Table 9 Drive data addresses (YUV3_625ip)

Color temperature	R	G	B
High	A0-11A4	A0-11A5	A0-11A6
Medium	A0-11A7	A0-11A8	A0-11A9
Low	A0-11AA	A0-11AB	A0-11AC

11.3. Power control adjustment

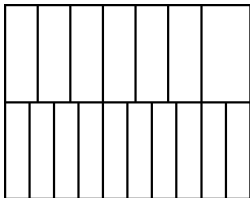Instrument Name	Connection	Remarks
<ul style="list-style-type: none"> PC (RGB) signal generator (Leader: VGA/No.9 signal) Wattmeter 	<ul style="list-style-type: none"> PC input Connect the AC power of the adjustment set to the wattmeter. 	Set "RGB" at 'COMPONENT/RGB-IN SELECT' in Setup Menu.
Procedure		Remarks
<p>[condition]</p> <ul style="list-style-type: none"> Make sure the set is aged for 30 minutes or more before adjustment. Voltage 120V 50/60Hz (variation within 1%) Volume at minimum and screen size at full PC input and picture menu at normalized Dynamic <ol style="list-style-type: none"> Connect the set's AC power to the wattmeter. Receive the VGA No.9 signal from Leader. Select the PWRCTL item in Panel APL/ABL in the IIC mode. Adjust PWRCTL so the set's power consumption is description below. Adjust to shift large to small for DAC. <p>Factory adjustment with OSD</p> <p>37" 240+5/-12W 42" 210+5/-12W</p> <p>BUSCON without OSD</p> <p>37" 238+5/-12W 42" 287+5/-12W</p>		 <p>No.9 Signal Top half: Full color bar Bottom half: Horizontal 10 steps bar</p> <p>Notes:</p> <ol style="list-style-type: none"> When passing through factory adjustment mode, the power few watts which goes down is the consideration being completed. Adjust the large number for DAC when they have 2 adjustment points.

12 Trouble shooting guide

12.1. Self Check

12.1.1. Display Indication

1. Self-check is used to automatically check the bus line controlled circuit of the Plasma display.
2. To get into the Self-check mode, press the **volume down** button on the customer controls at the bottom of the set, at the same time pressing the **OFF-TIMER** button on the remote control, and the screen will show:-

If the CCU ports have been checked and found to be incorrect Or not located then " - - " will appear in place of " OK "

" 01 " in the line of the " PTCT " means the number of blinks of the Power LED is 1. (Reference to 12.1.2)

" H09 " in the line of the " PTCT " is the error code.

Note:

The line of the " PTCT " displays when you get into the Self-check mode for the first time only after the Power LED blinks.

12.1.2. Power LED Blinking timing chart

1. Subject

Information of LED Blinking timing chart.

2. Contents

When an abnormality has occurred the unit, the protection circuit operates and reset to the stand by mode. At this time, the defective block can be identified by the number of blinks of the Power LED on the front panel of the unit.

ID	IIC1	IIC2	IIC3	IIC4
DA	IC4703	OK	H90	
	IC4001	OK	H61	
	IC4201	OK	H56	
	IC4501	OK	H53	
D	PANEL	OK		
J	IC8181	OK	H51	
	IC3001	OK	H22	
	IC3003	OK	H63	
	IC3004	OK	H64	
	IC3005	OK	H65	
	IC2303	OK	H21	
PTCT	01	H09		

Blinking times	Blinking timing	Contents	Check point
1		No particular check point	—
2		15V SOS	P-Board
3		3.3V SOS	D-Board DA-Board
4		POWER SOS	P-Board
5		5V SOS	P-Board D-Board DA-Board
6		Driver SOS1	SC-Board
7		Driver SOS2	SC-Board
8		Driver SOS3	SS-Board
9		Panel Config SOS	D-Board
10		PF SOS	P-Board
11		FAN SOS	PB-Board FAN

3. Remarks


Above Fan function is operated during the fans are installed.

12.2. No Power


First check point

There are following 3 states of No Power indication by power LED.


1. No lit.
2. Green is lit then turns red blinking a few seconds later.
3. Only red is lit.

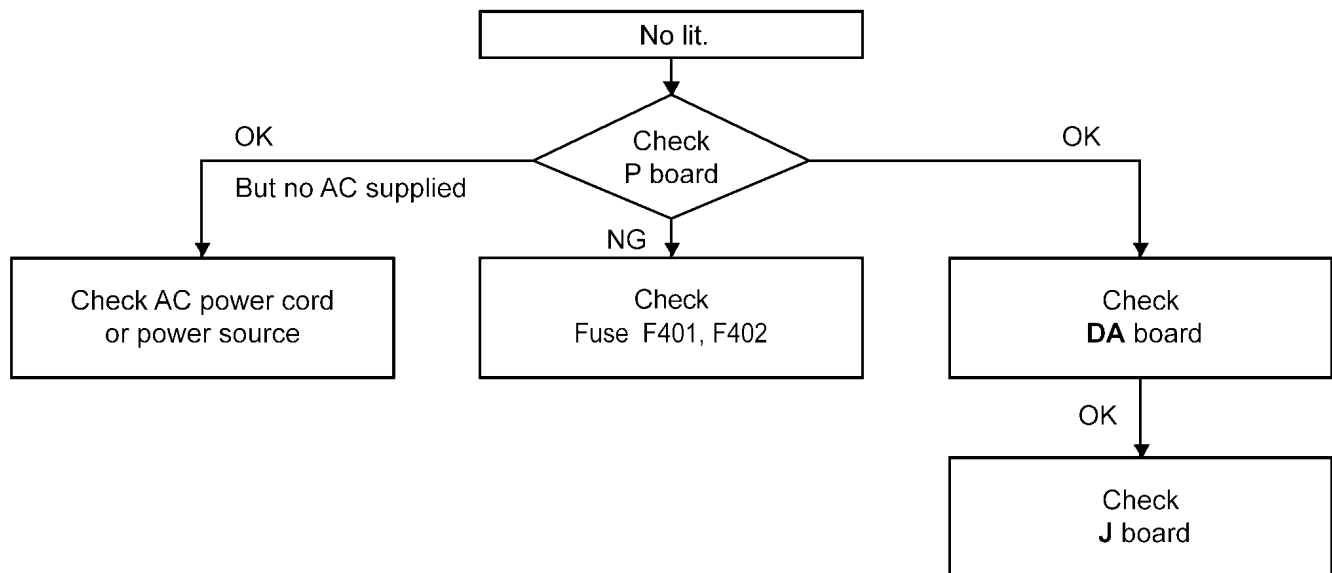

12.3. No Picture

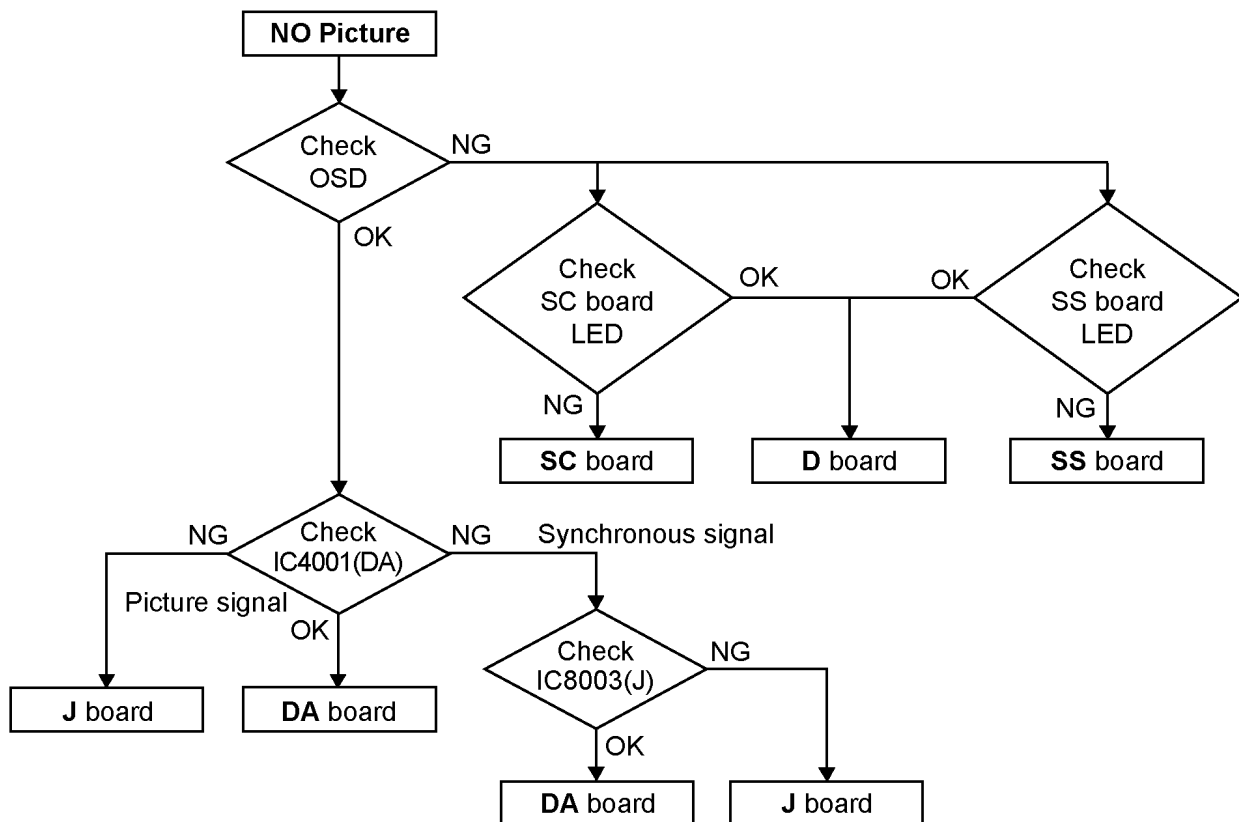


Drive circuits LED indicator

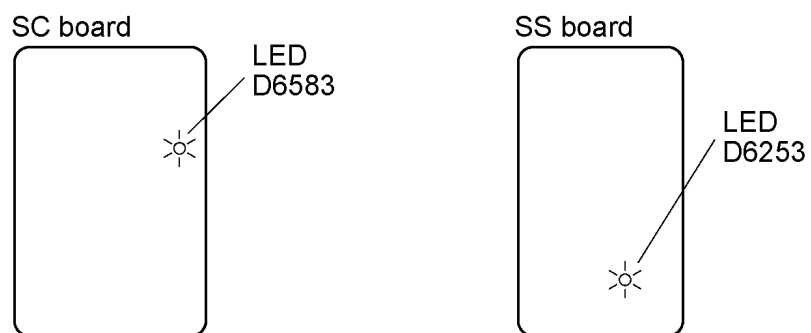

12.4. Local screen failure

Plasma display may have local area failure on the screen. Fig - 1 is the possible defect P.C.B. for each local area.

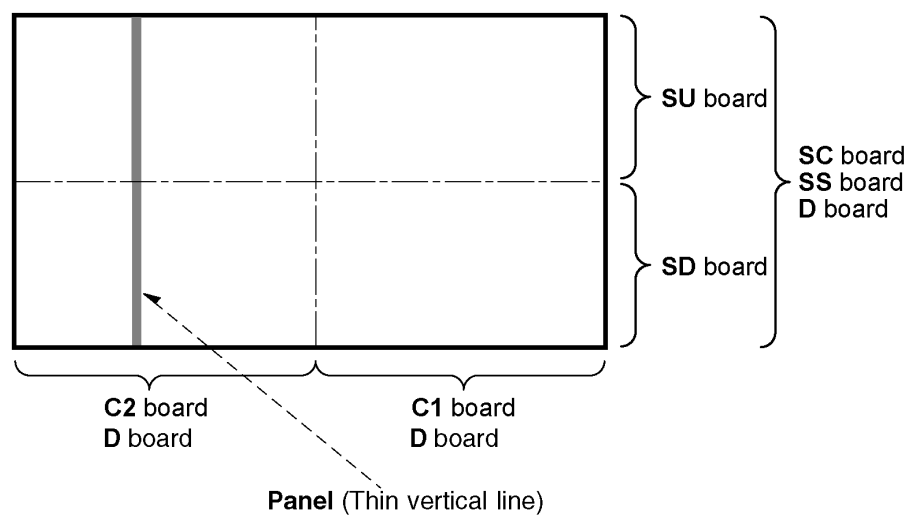



<Local screen failure chart>


Fig - 1


13 Option Setting

How to access the Option menu


1  Press to display the Setup menu.


2  Press to select "OSD Language".

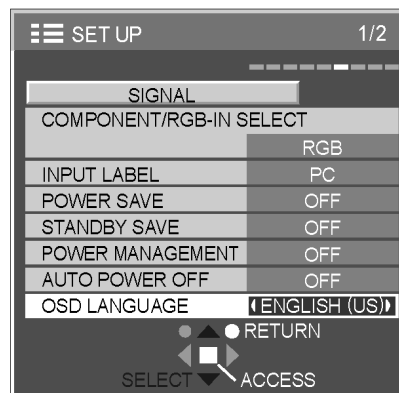



3  Press and hold until the Options menu is displayed.

Setting the Option menus

1  Press to select your preferred menu.

2  Press to adjust the menu.
Press to confirm.

3  Press to exit from Options menu.

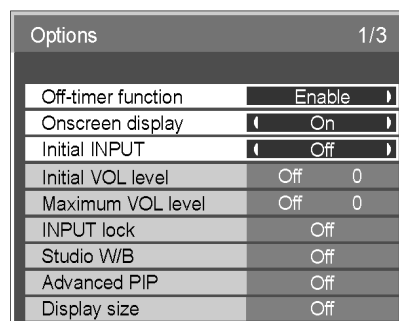

Option Menu for GPH9D series

GPH9D chassis series have special function and operation setting facility called Option Menu. This Option Menu is useful for special function required customers. This should be set at the installation stage.

Option menus	default setting	Contents
Off-timer function	Enable	Off-timer operation Enable/Disable.
Onscreen display	On	Enable/Disable to display input mode indication after power on and no signal indication.
Initial INPUT	Off	Sets the initial input mode when the power is turned on. Allow input mode selection while power is on.
Initial VOL level	Off	Sets the initial volume level when the power is turned on. Allow Volume control while power is on.
Maximum VOL Level	Off	Sets the maximum volume to desired level. Volume cannot exceed this level.
INPUT lock	Off	Fixes the input mode to AV, Component/RGB or PC. Can not change input mode by input selection key.
Studio W/B	Off	Set warm mode color temperature to 3,200 Kelvin.
Advanced PIP	Off	Off: Sets normal two screen display mode. On: Sets Advanced PIP mode.
Display size	Off	Adjusts the image display size on screen. On: Sets the image display size approximately 95% of the normal image display.
Button lock	Off	Enable/Disable bottom operation buttons (Input, Menu, Enter and/or volume up/down)
Remocon User Level	Off	Remote key invalidation. Off: Valid key is all key of remote. User1: Valid key are only Stand-by (ON/OFF), Input, Direct input, Status, Surround, Sound mute On/Off, and volume adjustment. User2: Valid key is only Stand-by (ON/OFF). User3: All keys are null and void
ID select	0	Set ID number from 0 to 100.
Remote ID	Off	Remote ID function On/Off. (While the Remote ID on, standard remote function can not control the unit.)
Serial ID	Off	Serial ID function On/Off
Slot power	Off	Sets the slot power mode while the power is turned on. Allow Optional Terminal Board insert Slots while power is on.
V. Installation	Off	V. Installation function On/Off (Not used)
Rotate	Off	The image rotates 180 degrees (up-down)
Serial Slot Select	Slot1	Selects the slot which communicates serial. Note: The setting of an external command can be set only from the fixed serial terminal.


Note:


When both main unit buttons and remote control are disabled due to the "Button lock", "Remocon User level" or "RemoteID" adjustments, set all the values "Off" so that all the buttons are enabled again.

Press the "Volume down" button on main unit together with "R" button on the remote control and hold for more than 5 seconds. The "SHIPPING" menu is displayed and the lock is released when it disappears.

14 Conduct Views

14.1. P-Board (37inch)

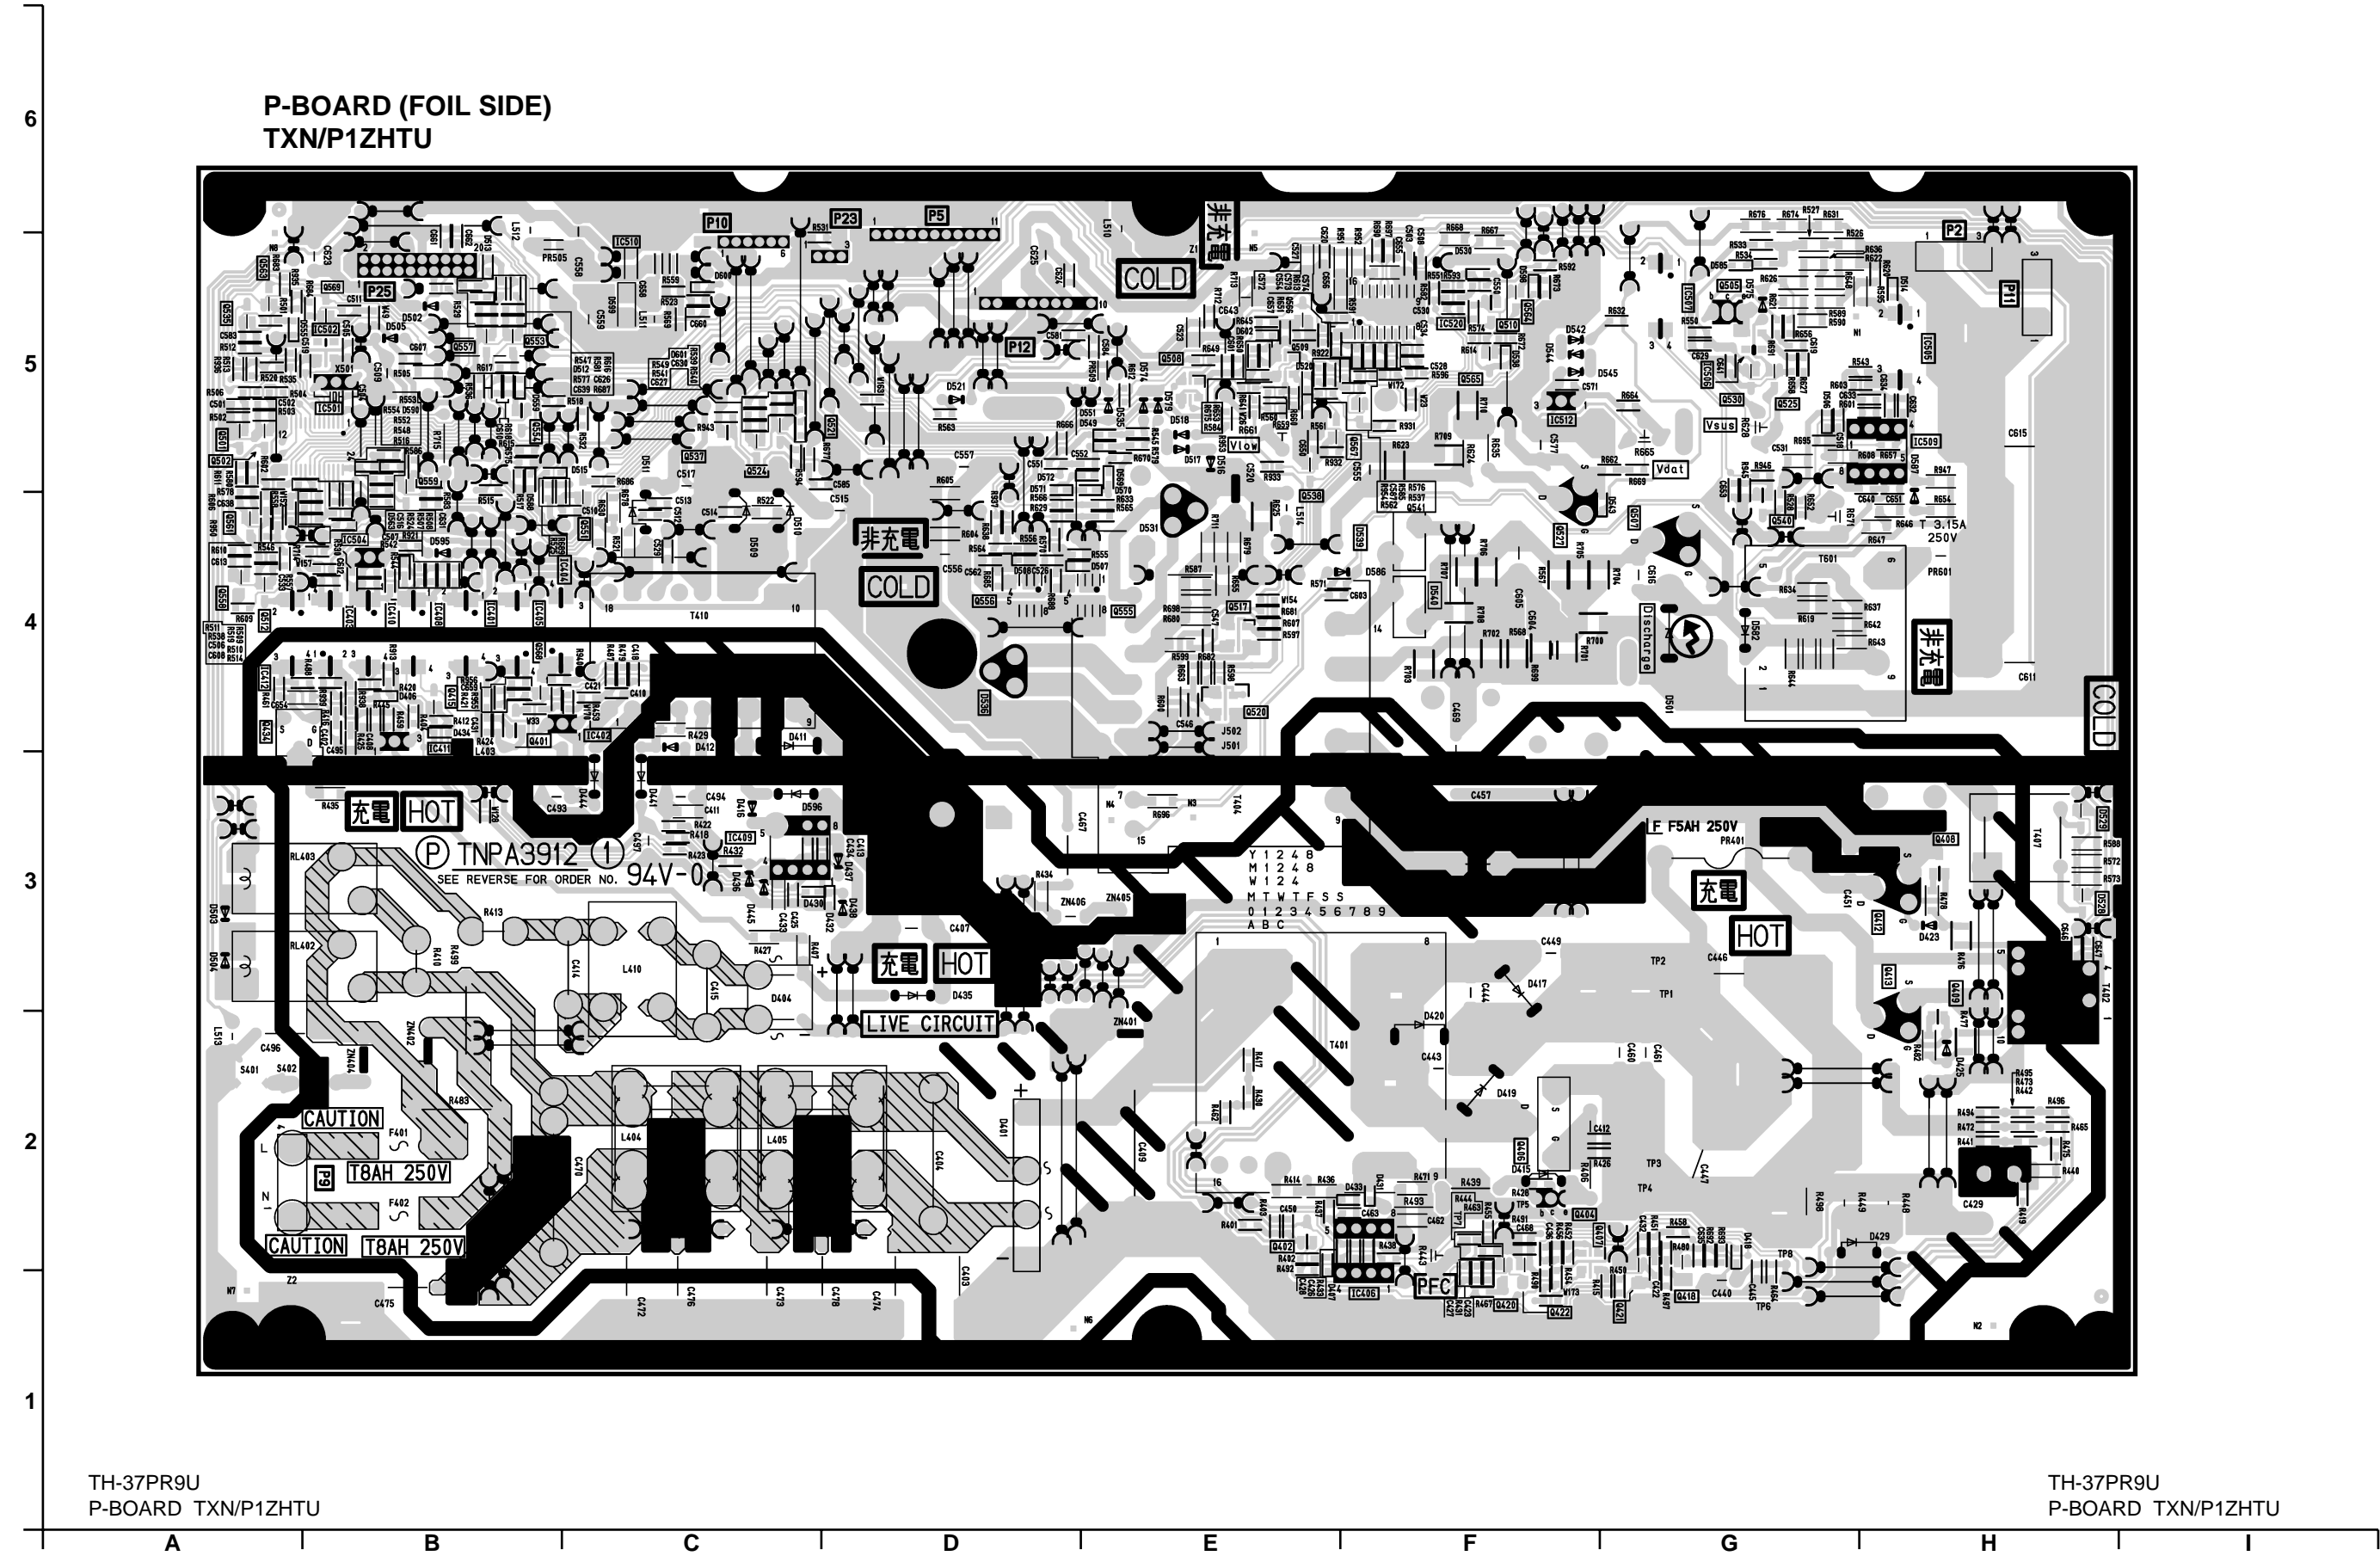

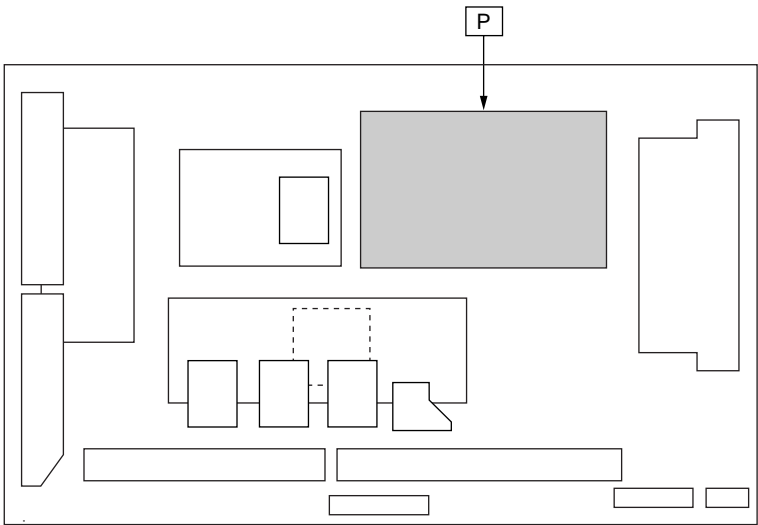

Parts Location

P-BOARD (FOIL SIDE)					
IC		TRANSISTOR			
IC401	B-4	Q401	B-4	Q535	A-5
IC402	C-4	Q402	E-2	Q537	C-5
IC403	B-4	Q404	F-1	Q538	E-4
IC404	C-4	Q406	F-2	Q540	G-4
IC405	B-4	Q407	F-1	Q541	F-5
IC406	F-1	Q408	H-3	Q551	C-4
IC408	B-4	Q409	H-3	Q553	B-5
IC409	C-3	Q412	H-3	Q554	B-5
IC410	B-4	Q413	H-3	Q555	E-4
IC411	B-4	Q415	B-4	Q556	D-4
IC412	A-4	Q418	G-1	Q557	B-5
IC501	B-5	Q420	F-1	Q558	A-4
IC502	B-5	Q421	G-1	Q559	B-5
IC504	B-4	Q422	F-1	Q561	A-4
IC505	H-5	Q434	A-4	Q563	A-5
IC506	G-5	Q501	A-5	Q564	F-5
IC507	G-5	Q502	A-5	Q565	F-5
IC509	H-5	Q505	G-5	Q566	E-5
IC510	C-5	Q507	G-4	Q567	F-5
IC512	F-5	Q508	E-5	Q568	B-4
IC520	F-5	Q509	E-5	Q569	B-5
		Q510	F-5	VOLUME	
		Q512	A-4		
		Q517	E-4	R443	F-2
		Q520	E-4	R628	G-5
		Q521	D-5	R661	E-5
		Q524	C-5	R665	G-5
		Q525	G-5	R671	G-4
		Q527	F-4		
		Q530	G-5		

Parts Location

P-BOARD (COMPONENT SIDE)					
IC		TRANSITOR		VOLUME	
IC402	G-4	Q404	C-2	R443	D-2
IC406	D-1	Q406	D-2	R628	C-5
IC409	F-3	Q412	B-3	R661	D-5
IC411	H-4	Q413	B-3	R665	C-5
IC504	H-4	Q434	H-4	R671	B-4
IC509	B-5	Q505	C-5		
IC512	C-5	Q507	C-4		
		Q527	C-5		

6

P-BOARD (COMPONENT SIDE)
TXN/P1ZHTU


5

4

3


2

1

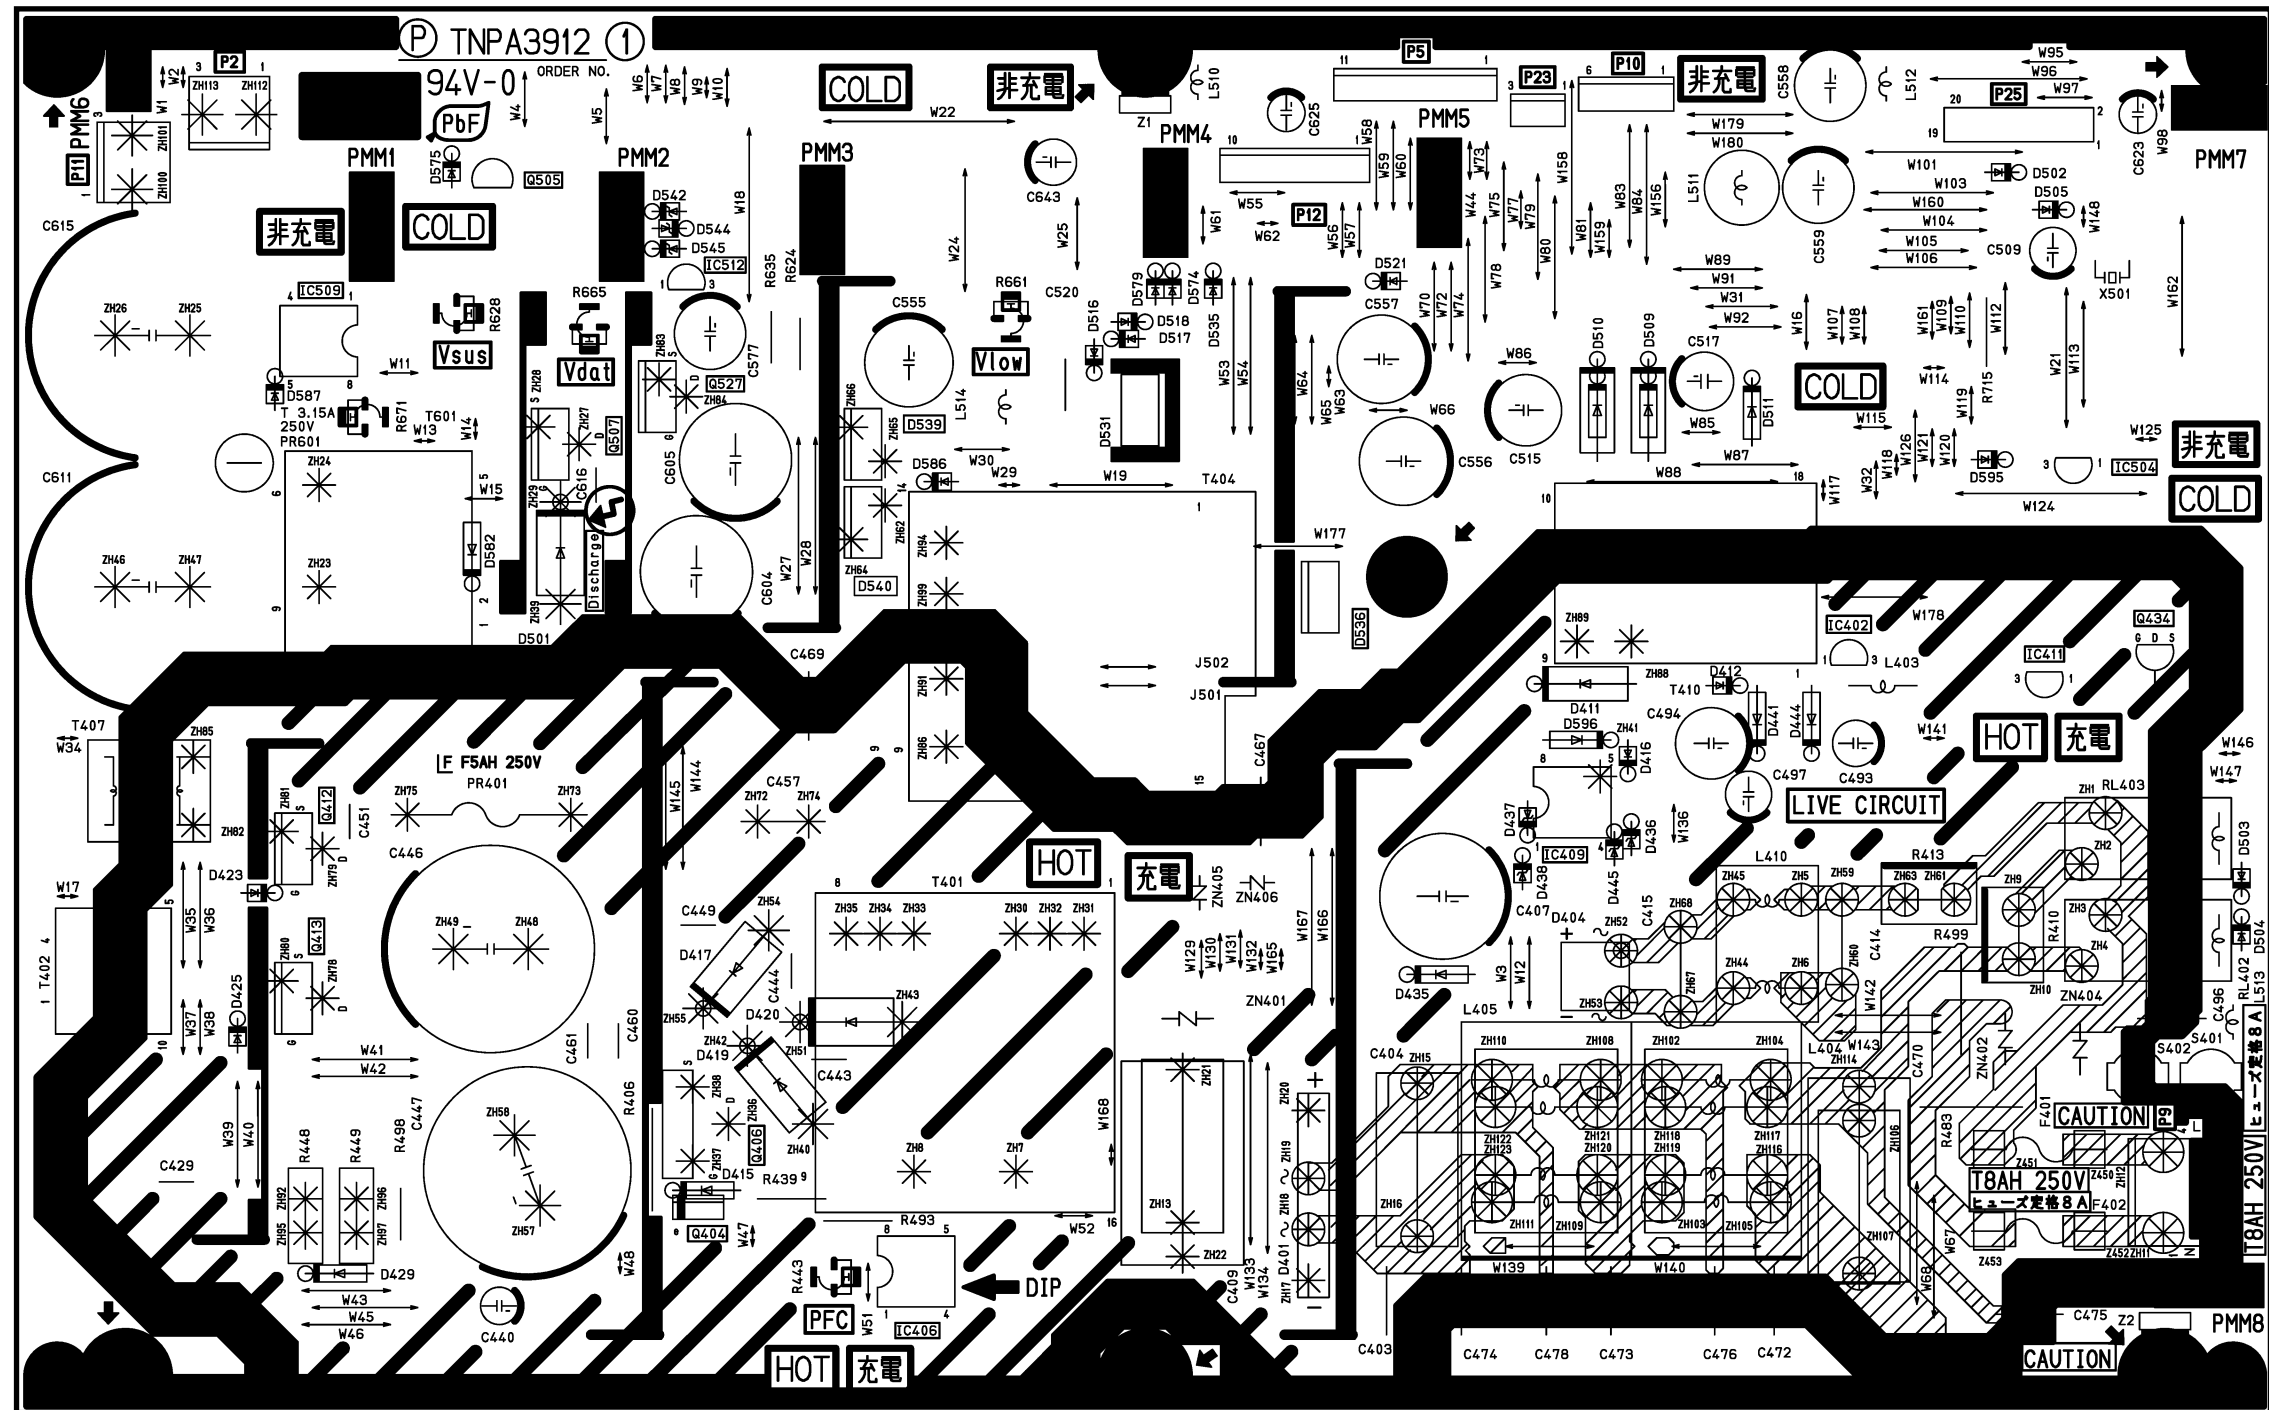


14.2. P-Board (42inch)

P-BOARD (FOIL SIDE)
TXN/P1ZKTU

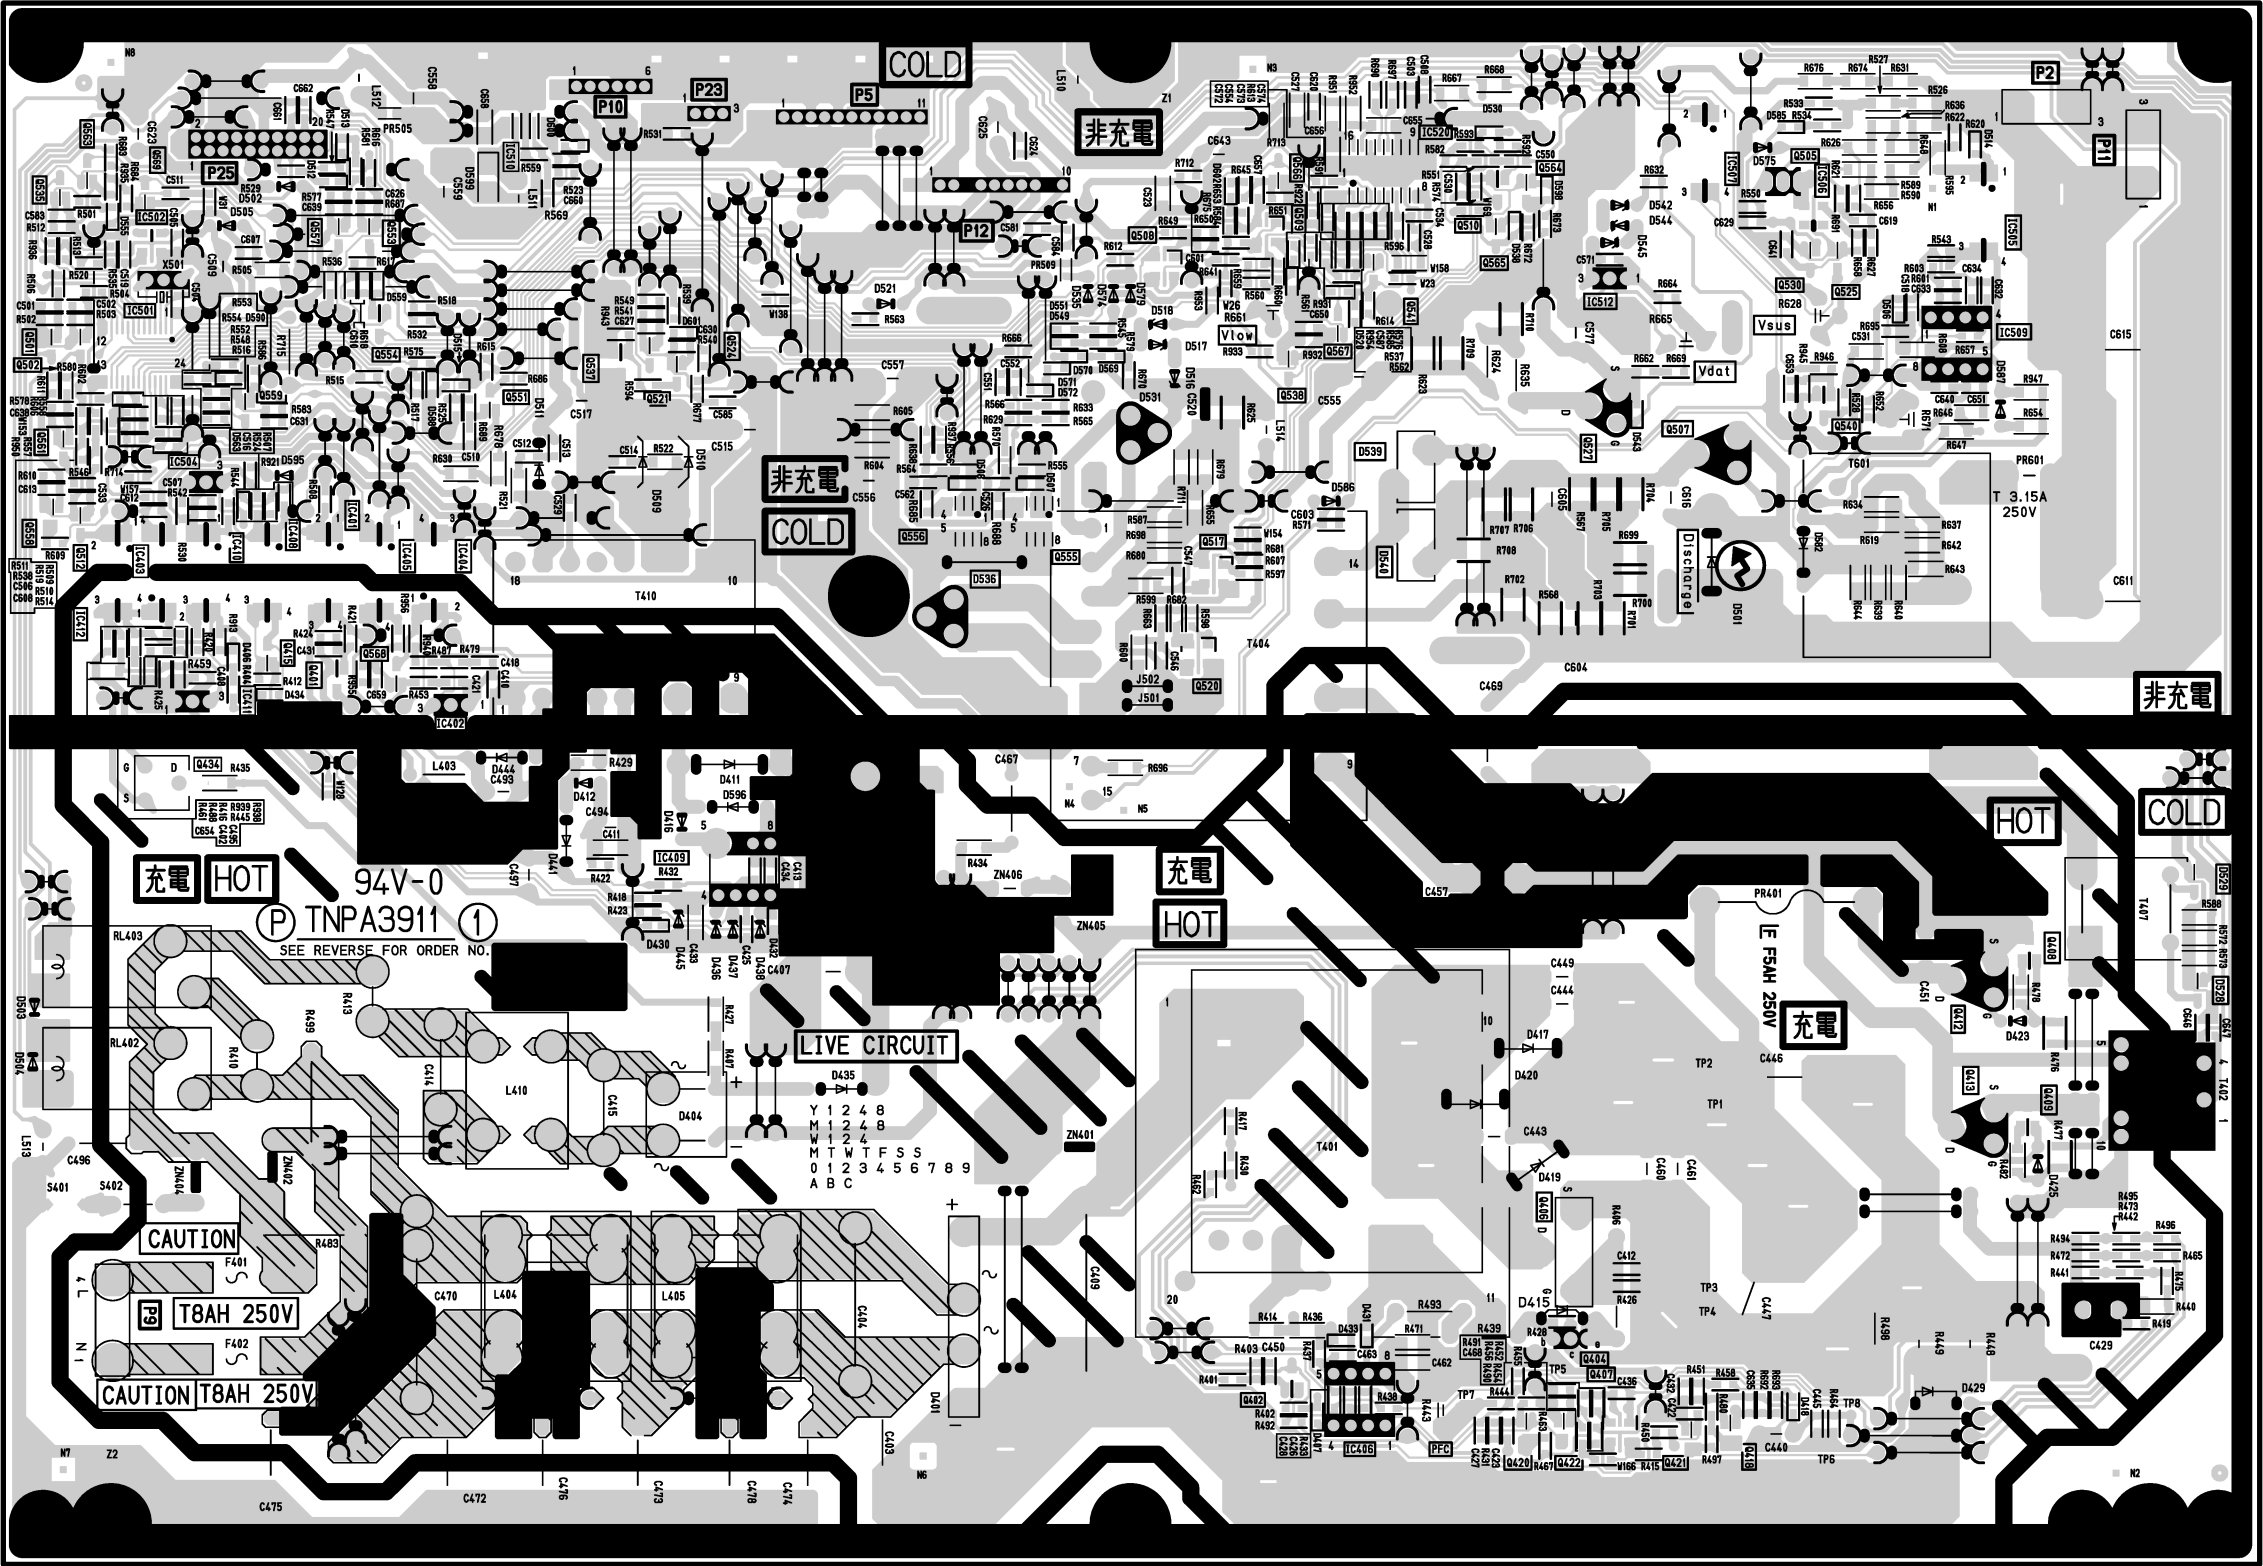

TH-42PR9U
P-BOARD TXN/P1ZKTU

TH-42PR9U
P-BOARD TXN/P1ZKTU

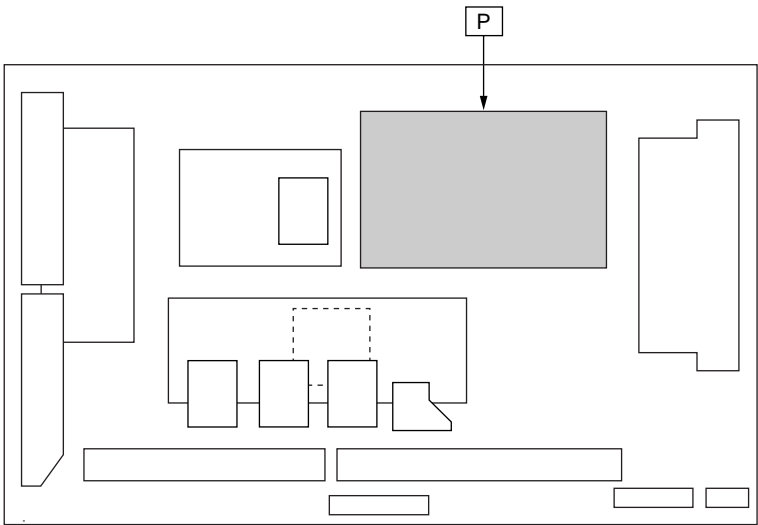

Parts Location

P-BOARD (FOIL SIDE)					
IC		TRANSISTOR			
IC401	B-4	Q401	B-4	Q535	A-5
IC402	C-4	Q402	E-1	Q537	C-5
IC403	B-4	Q404	F-1	Q538	E-5
IC404	C-4	Q406	F-2	Q540	G-5
IC405	C-4	Q407	F-1	Q541	F-5
IC406	F-1	Q408	H-3	Q551	C-5
IC408	B-4	Q409	H-2	Q553	B-5
IC409	C-3	Q412	H-3	Q554	B-5
IC410	B-4	Q413	H-2	Q555	E-4
IC411	B-4	Q415	B-4	Q556	D-4
IC412	A-4	Q418	G-1	Q557	B-5
IC501	B-5	Q420	F-1	Q558	A-4
IC502	B-5	Q421	G-1	Q559	B-5
IC504	B-4	Q422	F-1	Q561	A-5
IC505	H-5	Q434	B-4	Q563	A-6
IC506	G-5	Q501	A-5	Q564	F-6
IC507	G-6	Q502	A-5	Q565	F-5
IC509	H-5	Q505	G-6	Q566	E-6
IC510	C-6	Q507	G-5	Q567	F-5
IC512	F-5	Q508	E-5	Q568	B-4
IC520	F-6	Q509	E-5	Q569	B-6
		Q510	F-5	VOLUME	
		Q512	A-4		
		Q517	E-4	R443	F-1
		Q520	E-4	R628	G-5
		Q521	C-5	R661	E-5
		Q524	D-5	R665	G-5
		Q525	G-5	R671	H-4
		Q527	F-5		
		Q530	G-5		

TH-42PR9U
P-BOARD PARTS LOCATION


Parts Location

P-BOARD (COMPONENT SIDE)					
IC		TRANSITOR		VOLUME	
IC402	G-4	Q404	C-2	R443	D-1
IC406	D-1	Q406	D-2	R628	C-5
IC409	F-3	Q412	B-3	R661	D-5
IC411	H-4	Q413	B-2	R665	C-5
IC504	H-4	Q434	H-3	R671	B-5
IC509	B-5	Q505	C-5		
IC512	C-5	Q507	C-5		
		Q527	C-5		


TH-42PR9U
P-BOARD PARTS LOCATION

TH-42PR9U
P-BOARD TXN/P1ZKTU

14.4. HX-Board

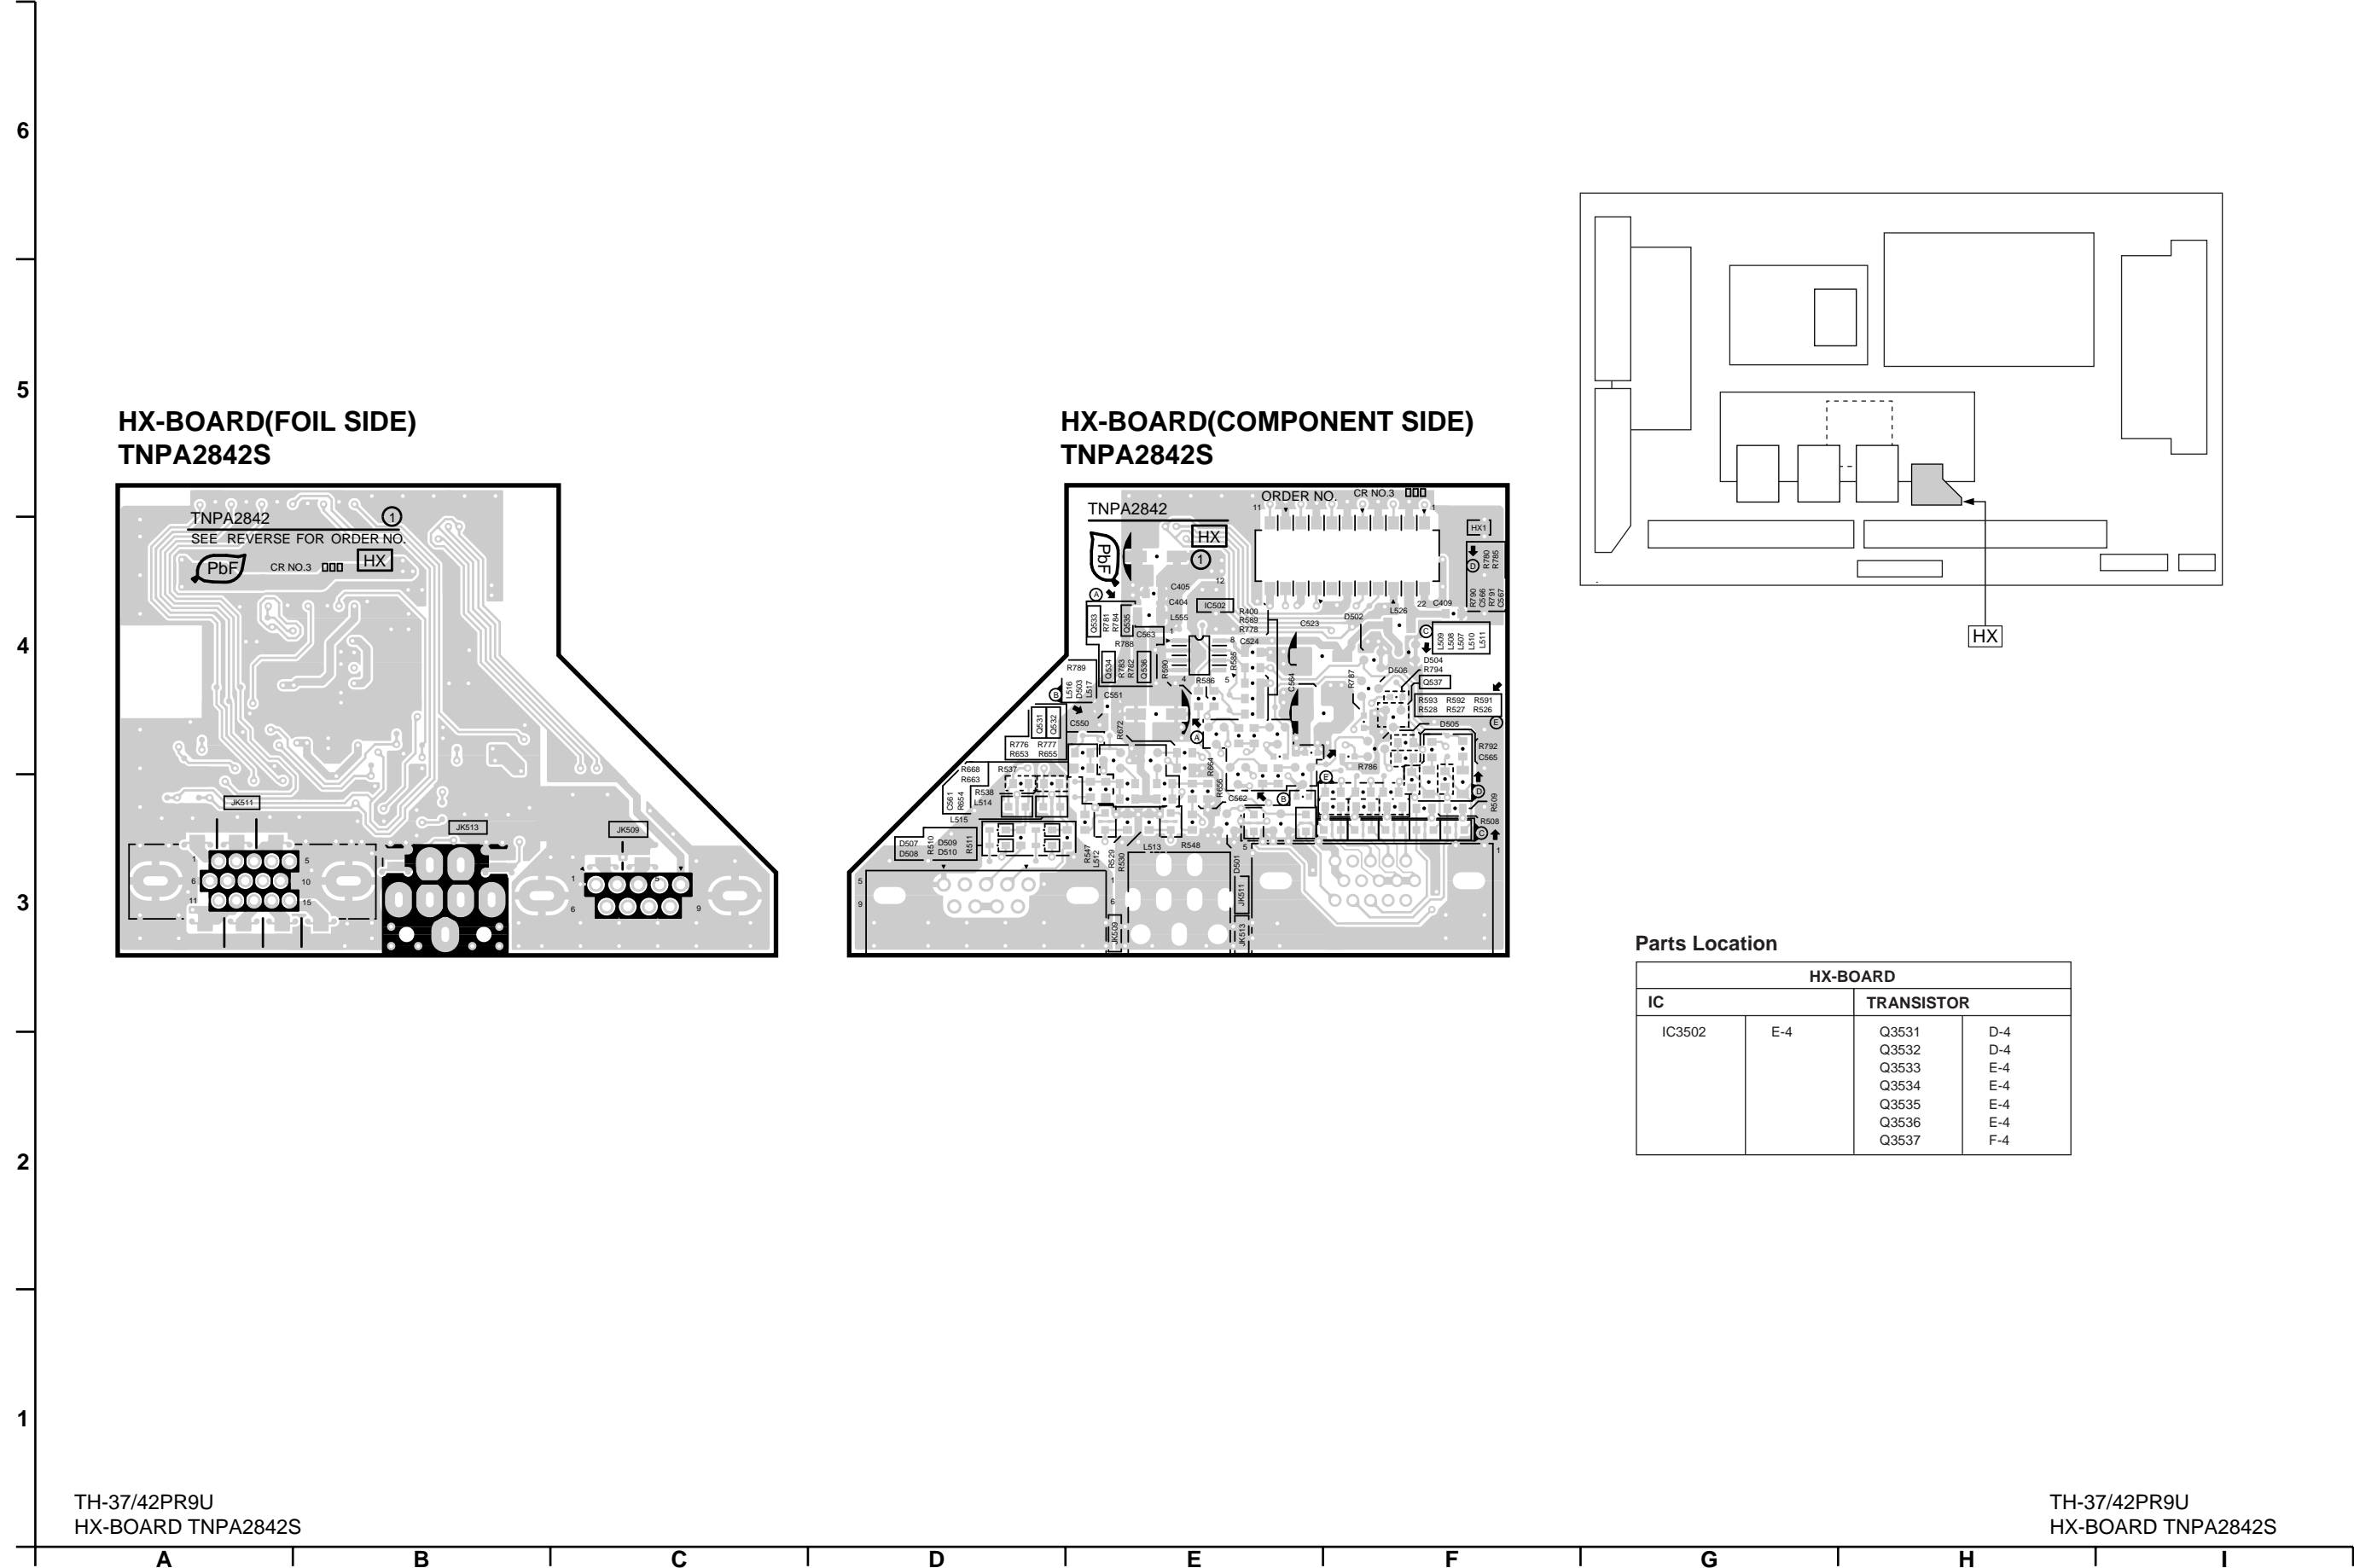

14.5. GK, K and S-Board

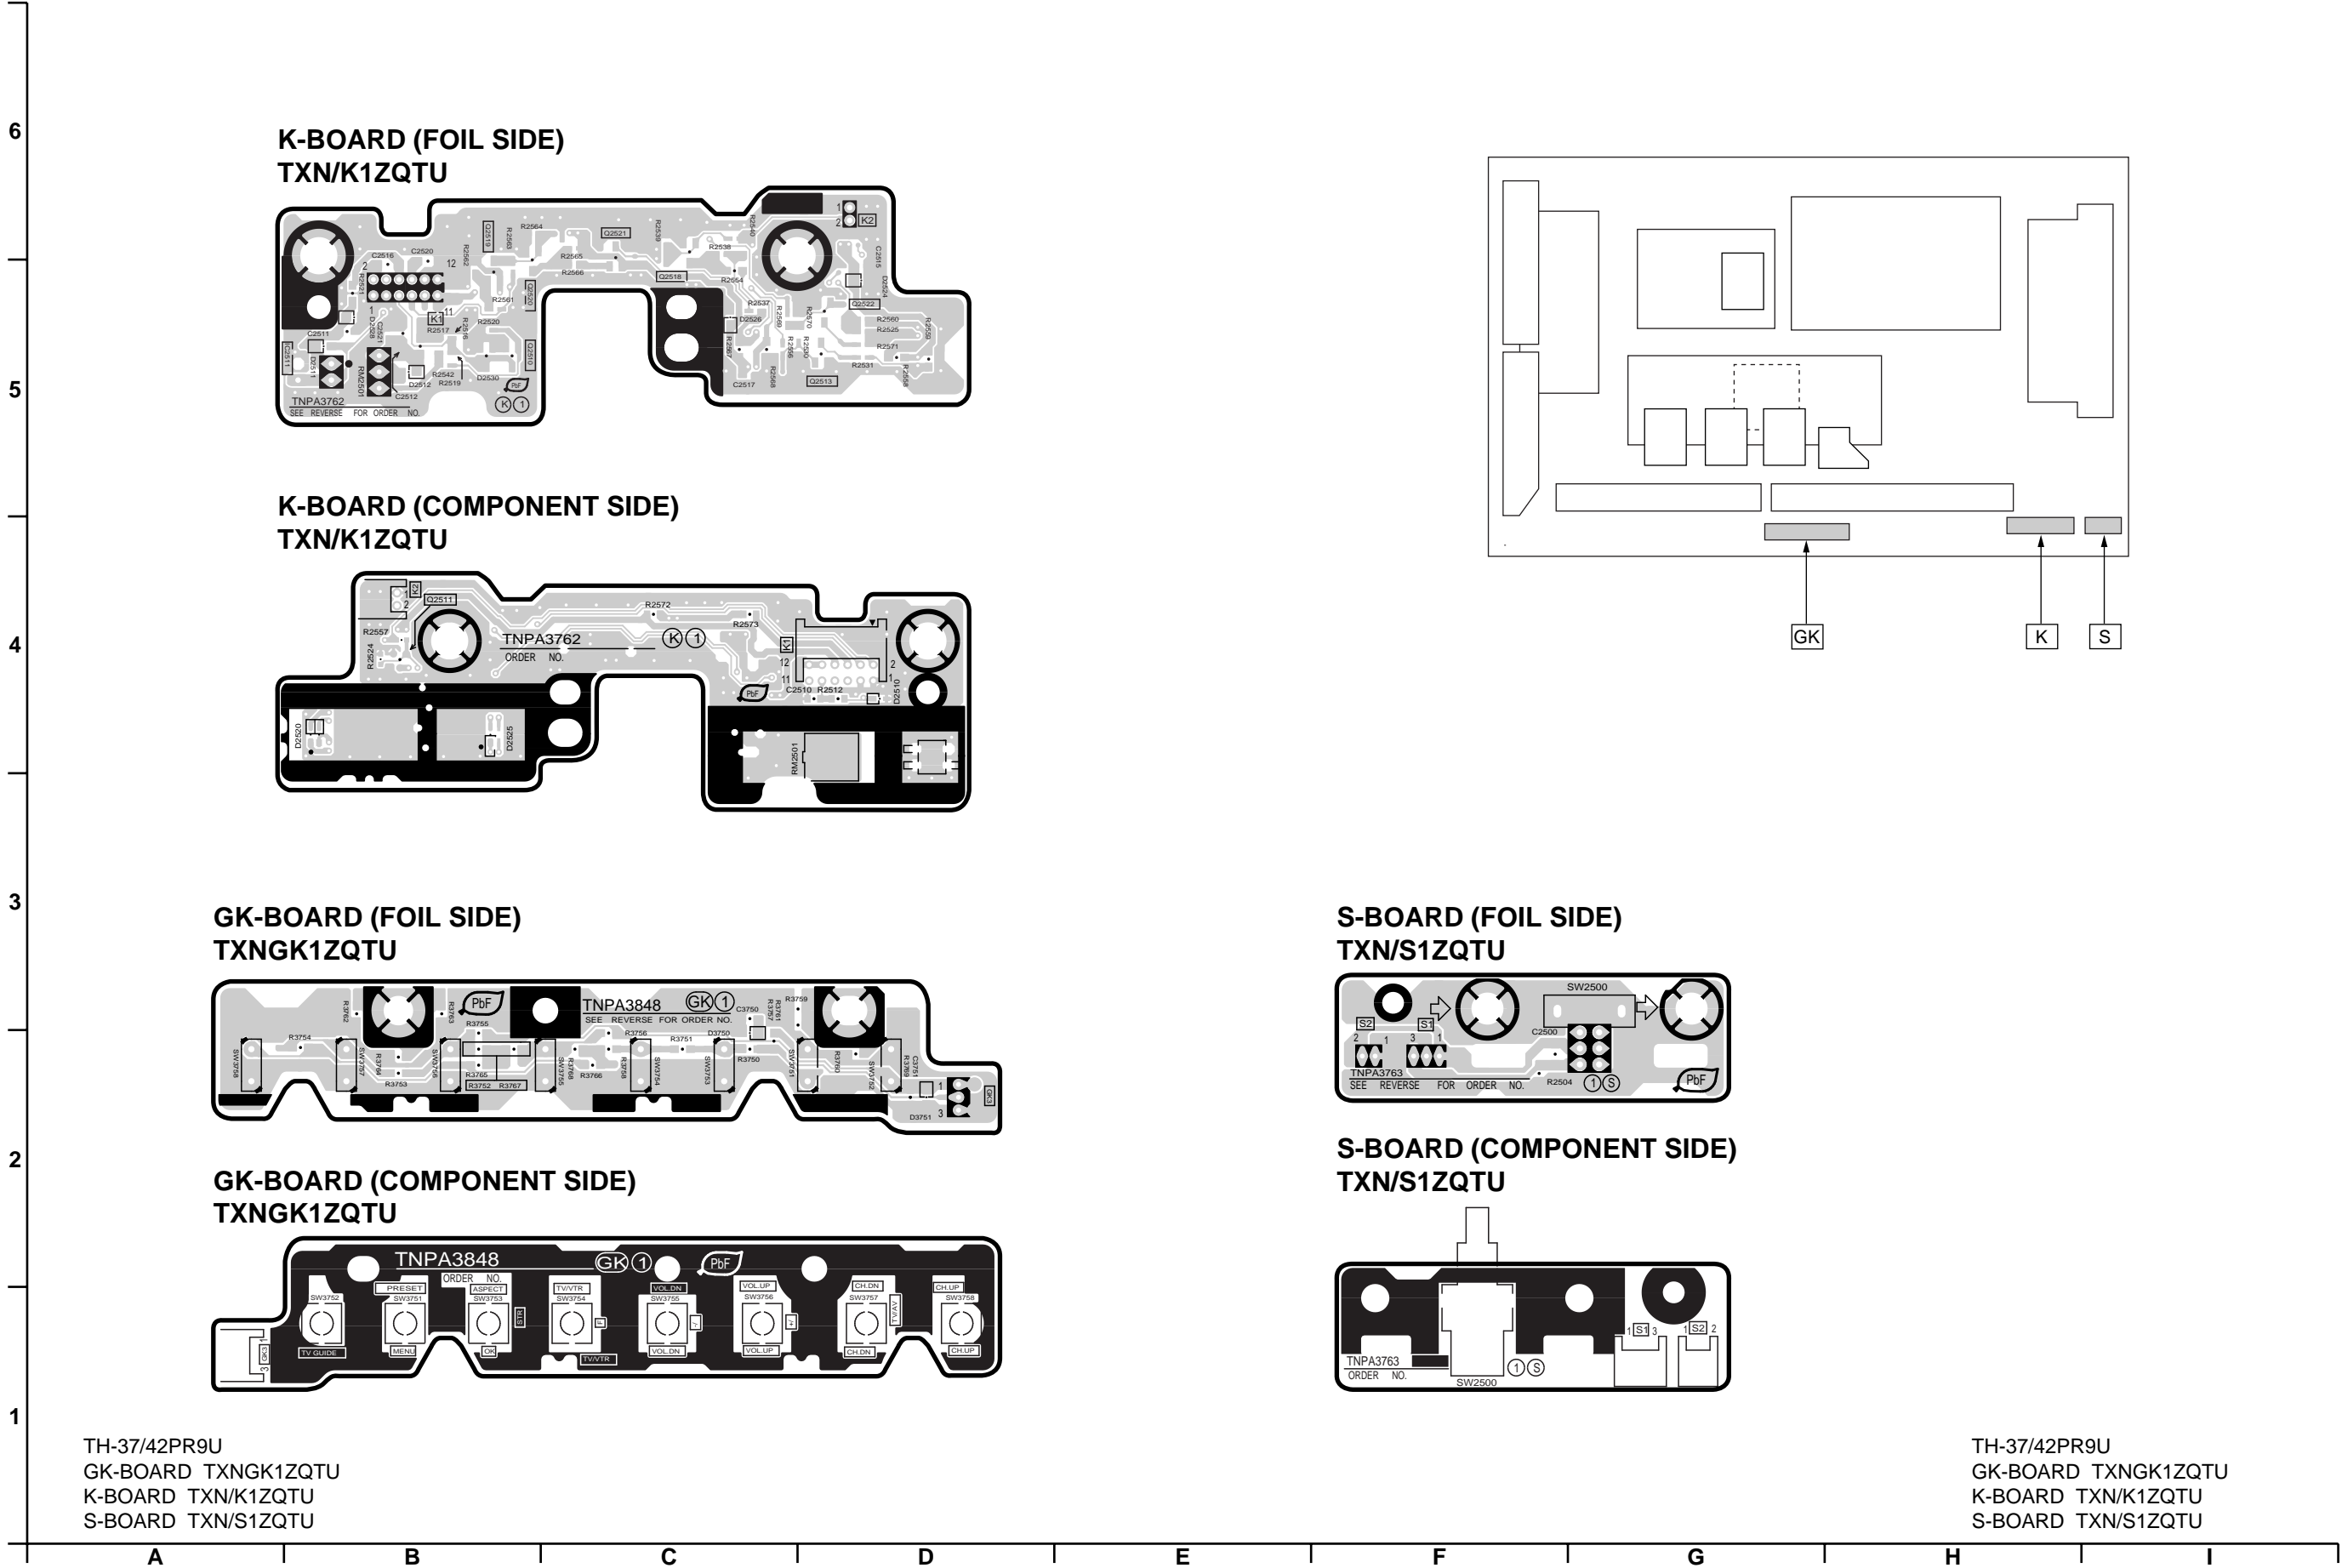

14.6. J-Board

6

5

4


3

2


1

Parts Location

J-BOARD (FOIL SIDE)	
IC	
IC801	E-2
IC802	E-2
IC8003	I-1

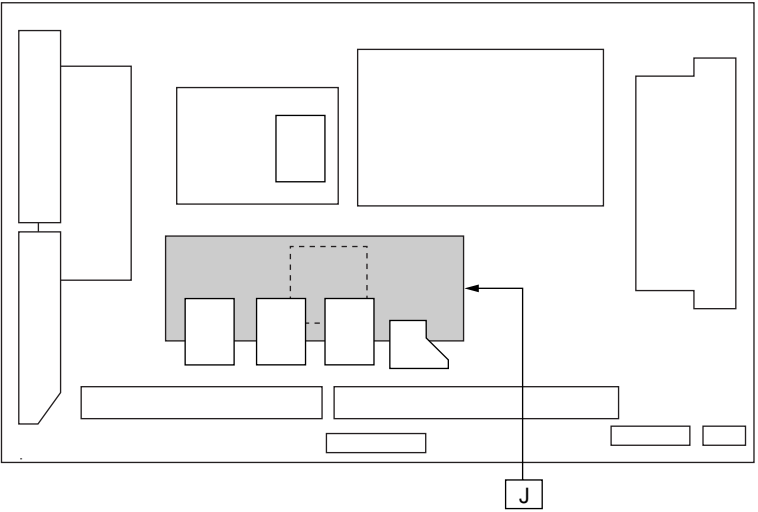

J-BOARD (FOIL SIDE)
TNPA3896ABS

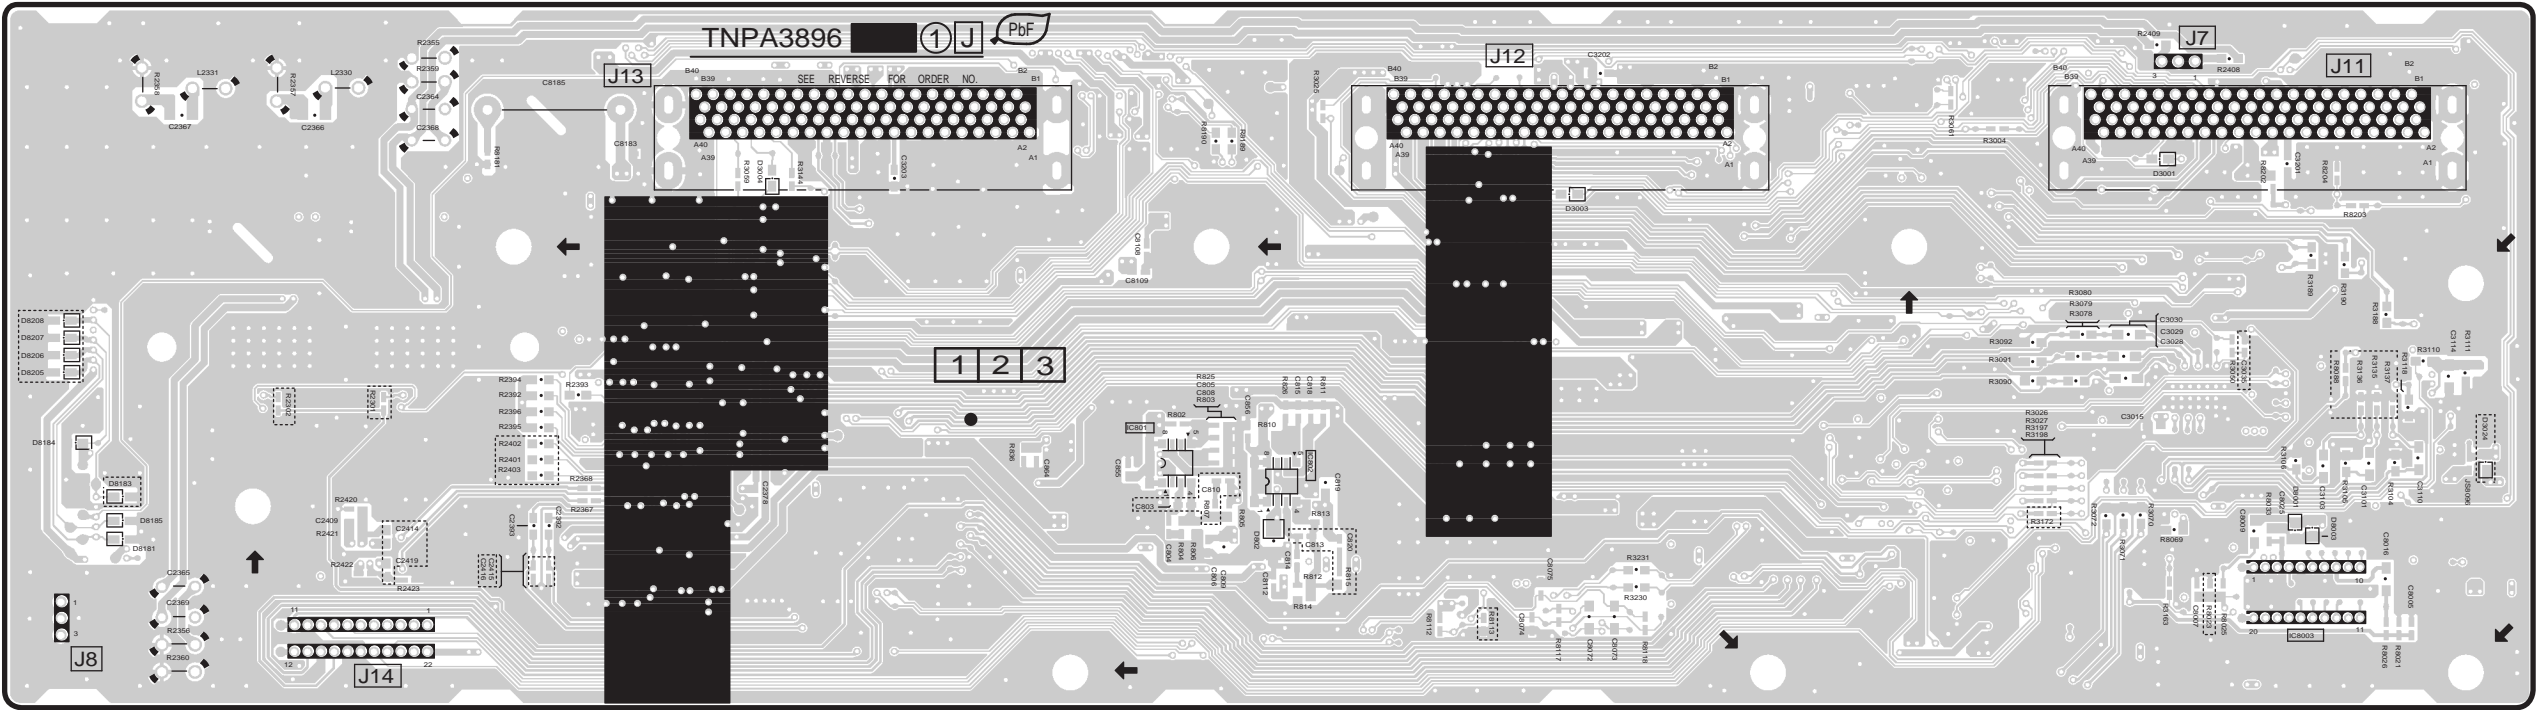

TH-37/42PR9U
J-BOARD TNPA3896ABS

TH-37/42PR9U
J-BOARD TNPA3896ABS

6

5


4

3

2

1

J-BOARD (COMPONENT SIDE)
TNPA3896ABS

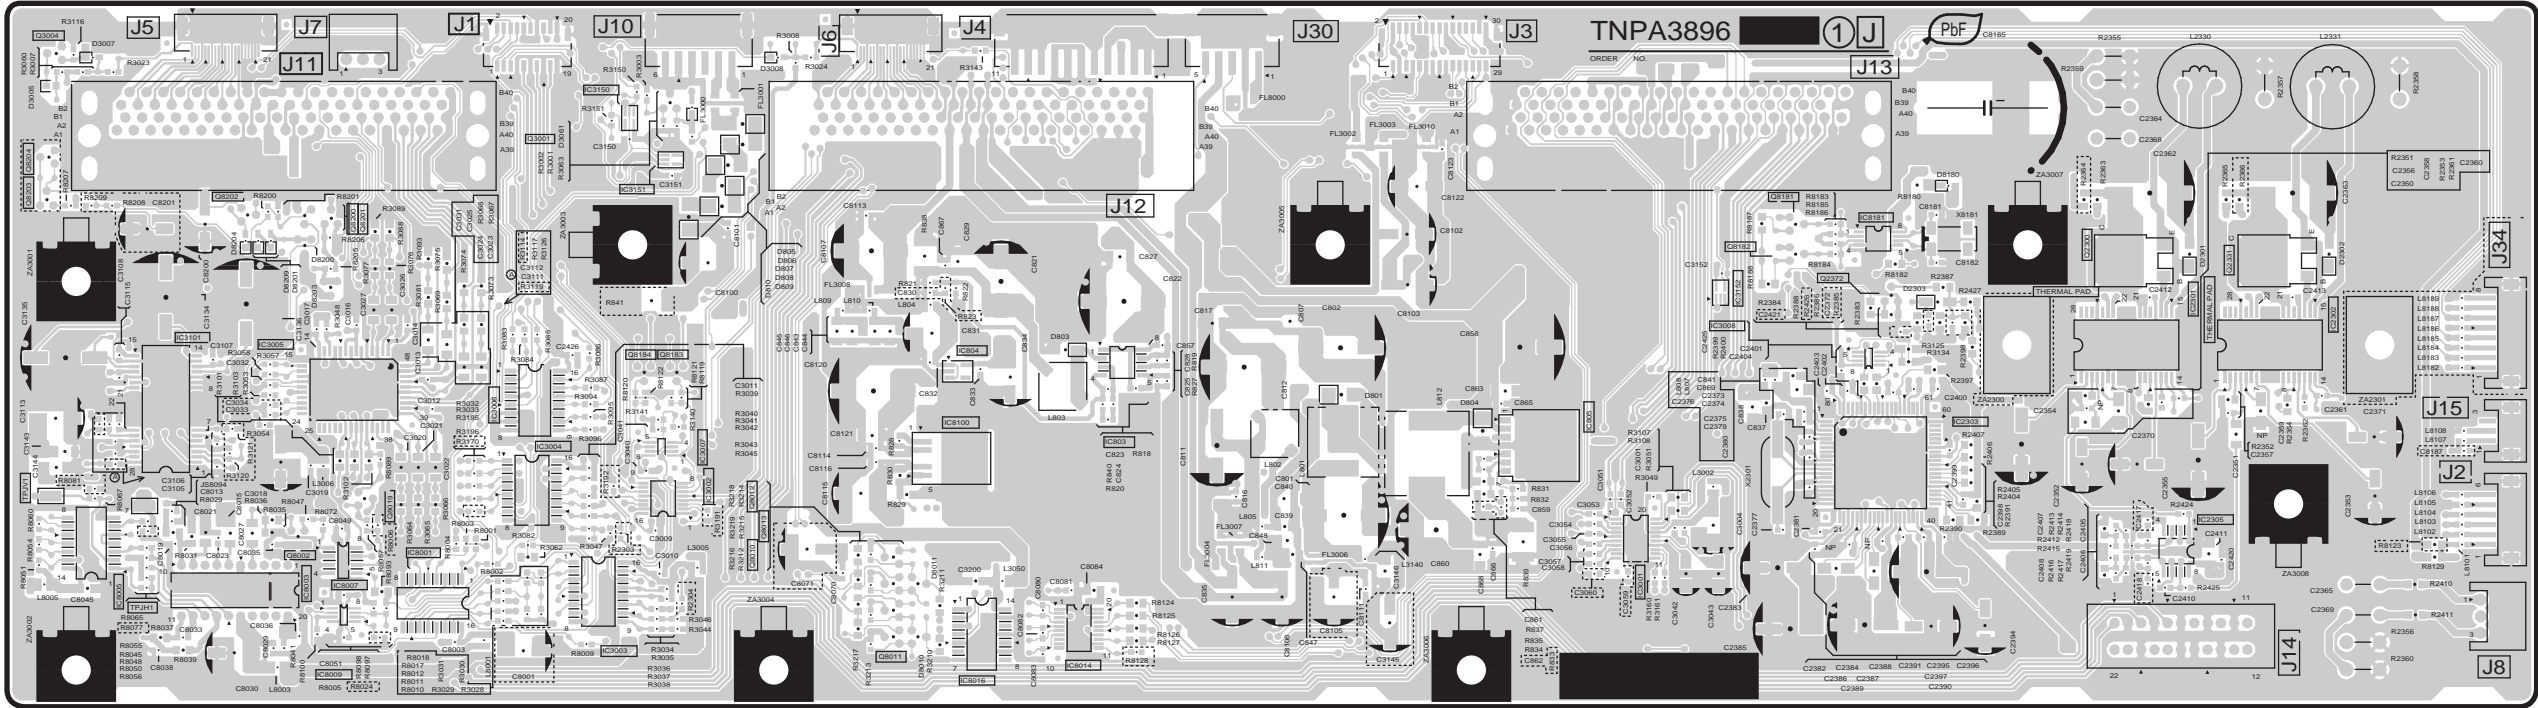


TH-37/42PR9U
J-BOARD TNPA3896ABS

TH-37/42PR9U
J-BOARD TNPA3896ABS



Parts Location

J-BOARD (COMPONENT SIDE)					
IC		TRANSISTOR		TP	
IC803	E-2	Q2300	H-2	TPJH1	A-2
IC804	D-2	Q2331	H-2	TPJV1	A-2
IC805	F-2	Q2372	G-2		
IC2301	H-2	Q3001	C-3		
IC2302	H-2	Q3004	A-3		
IC2303	G-2	Q8002	B-2		
IC2305	H-1	Q8010	D-1		
IC3001	F-1	Q8011	D-1		
IC3002	C-2	Q8012	D-1		
IC3003	C-1	Q8013	D-1		
IC3004	C-2	Q8019	B-2		
IC3005	B-2	Q8181	G-3		
IC3006	C-2	Q8182	G-2		
IC3007	C-2	Q8183	C-2		
IC3008	G-2	Q8184	C-2		
IC3101	A-2	Q8200	B-3		
IC3150	C-3	Q8201	B-3		
IC3151	C-3	Q8202	B-3		
IC3152	G-2	Q8203	A-3		
IC8001	B-1	Q8204	A-3		
IC8003	B-1				
IC8005	A-1				
IC8007	B-1				
IC8009	B-1				
IC8014	D-1				
IC8016	D-1				
IC8100	D-2				
IC8181	G-3				

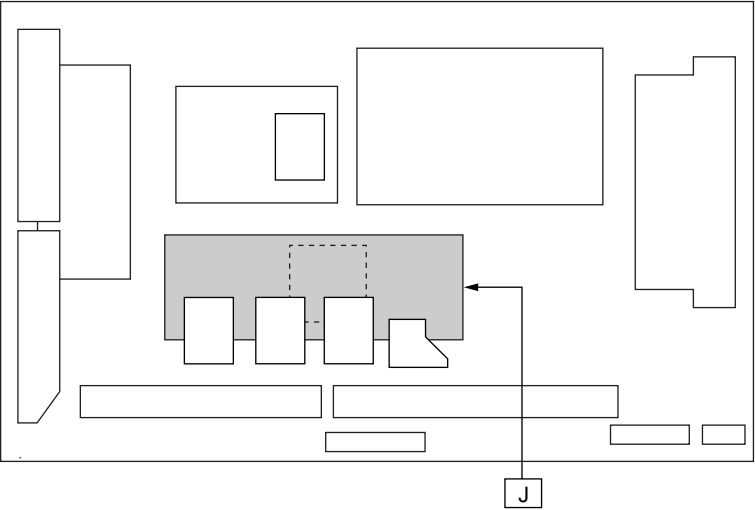

14.7. DA-Board

DA-BOARD (FOIL SIDE)
TXNDA1ZHTU (37inch)
TXNDA1ZKTU (42inch)

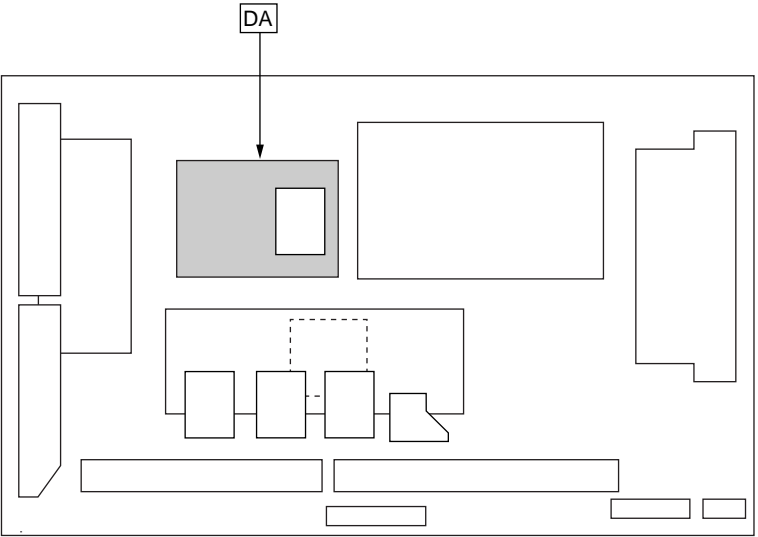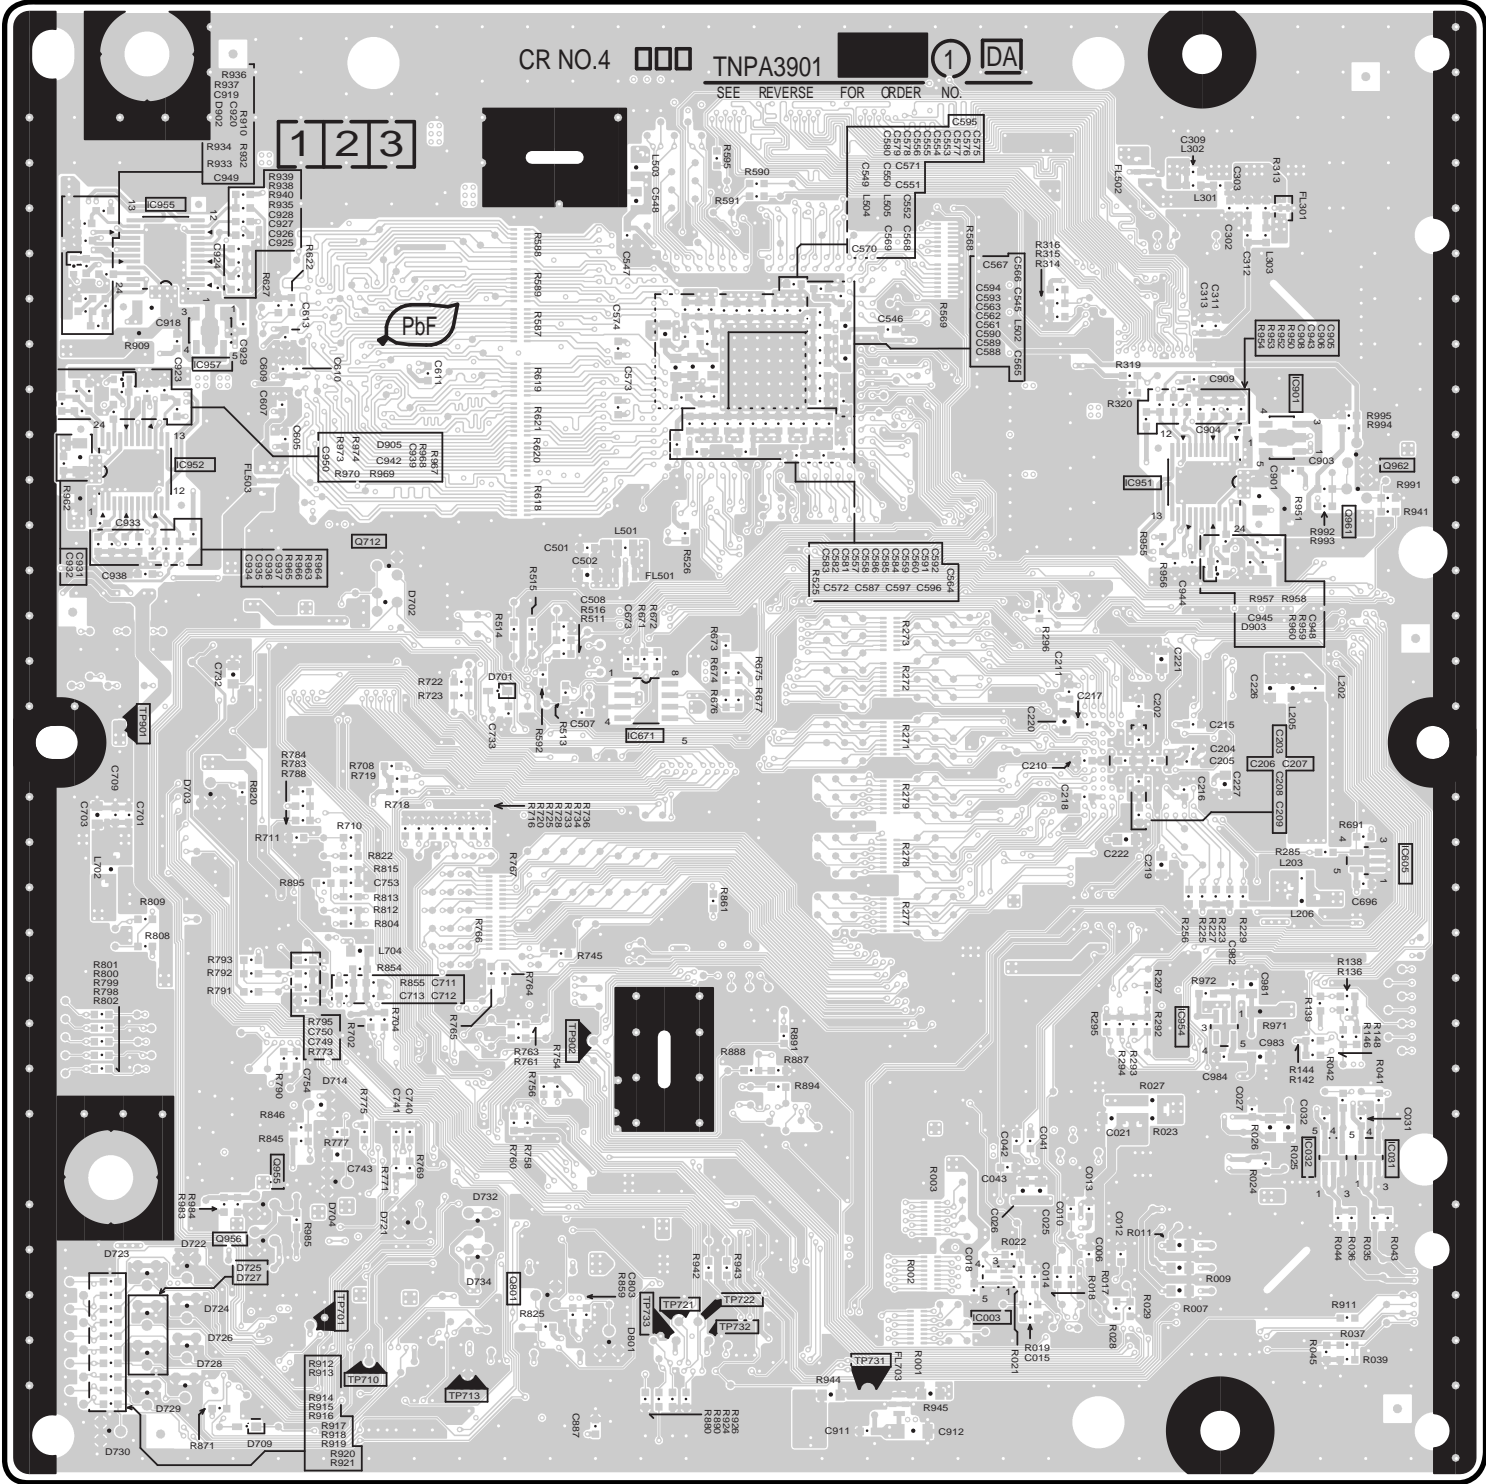

Parts Location


DA-BOARD (FOIL SIDE)					
IC	TRANSISTOR		TP		
IC4003	D-2	Q4712	B-4	TP4701	B-1
IC4031	E-2	Q4801	C-1	TP4710	B-1
IC4032	E-2	Q4955	B-2	TP4713	B-1
IC4605	E-3	Q4956	B-2	TP4721	C-1
IC4671	C-3	Q4961	E-4	TP4722	C-1
IC4901	E-4	Q4962	E-4	TP4731	D-1
IC4951	E-4			TP4732	C-1
IC4952	A-4			TP4733	C-1
IC4954	E-2			TP4901	A-3
IC4955	A-5			TP4902	C-2
IC4957	B-5				


TH-37PR9U
DA-BOARD TXNDA1ZHTU

TH-42PR9U
DA-BOARD TXNDA1ZKTU

TH-37PR9U
DA-BOARD TXNDA1ZHTU

TH-42PR9U
DA-BOARD TXNDA1ZKTU


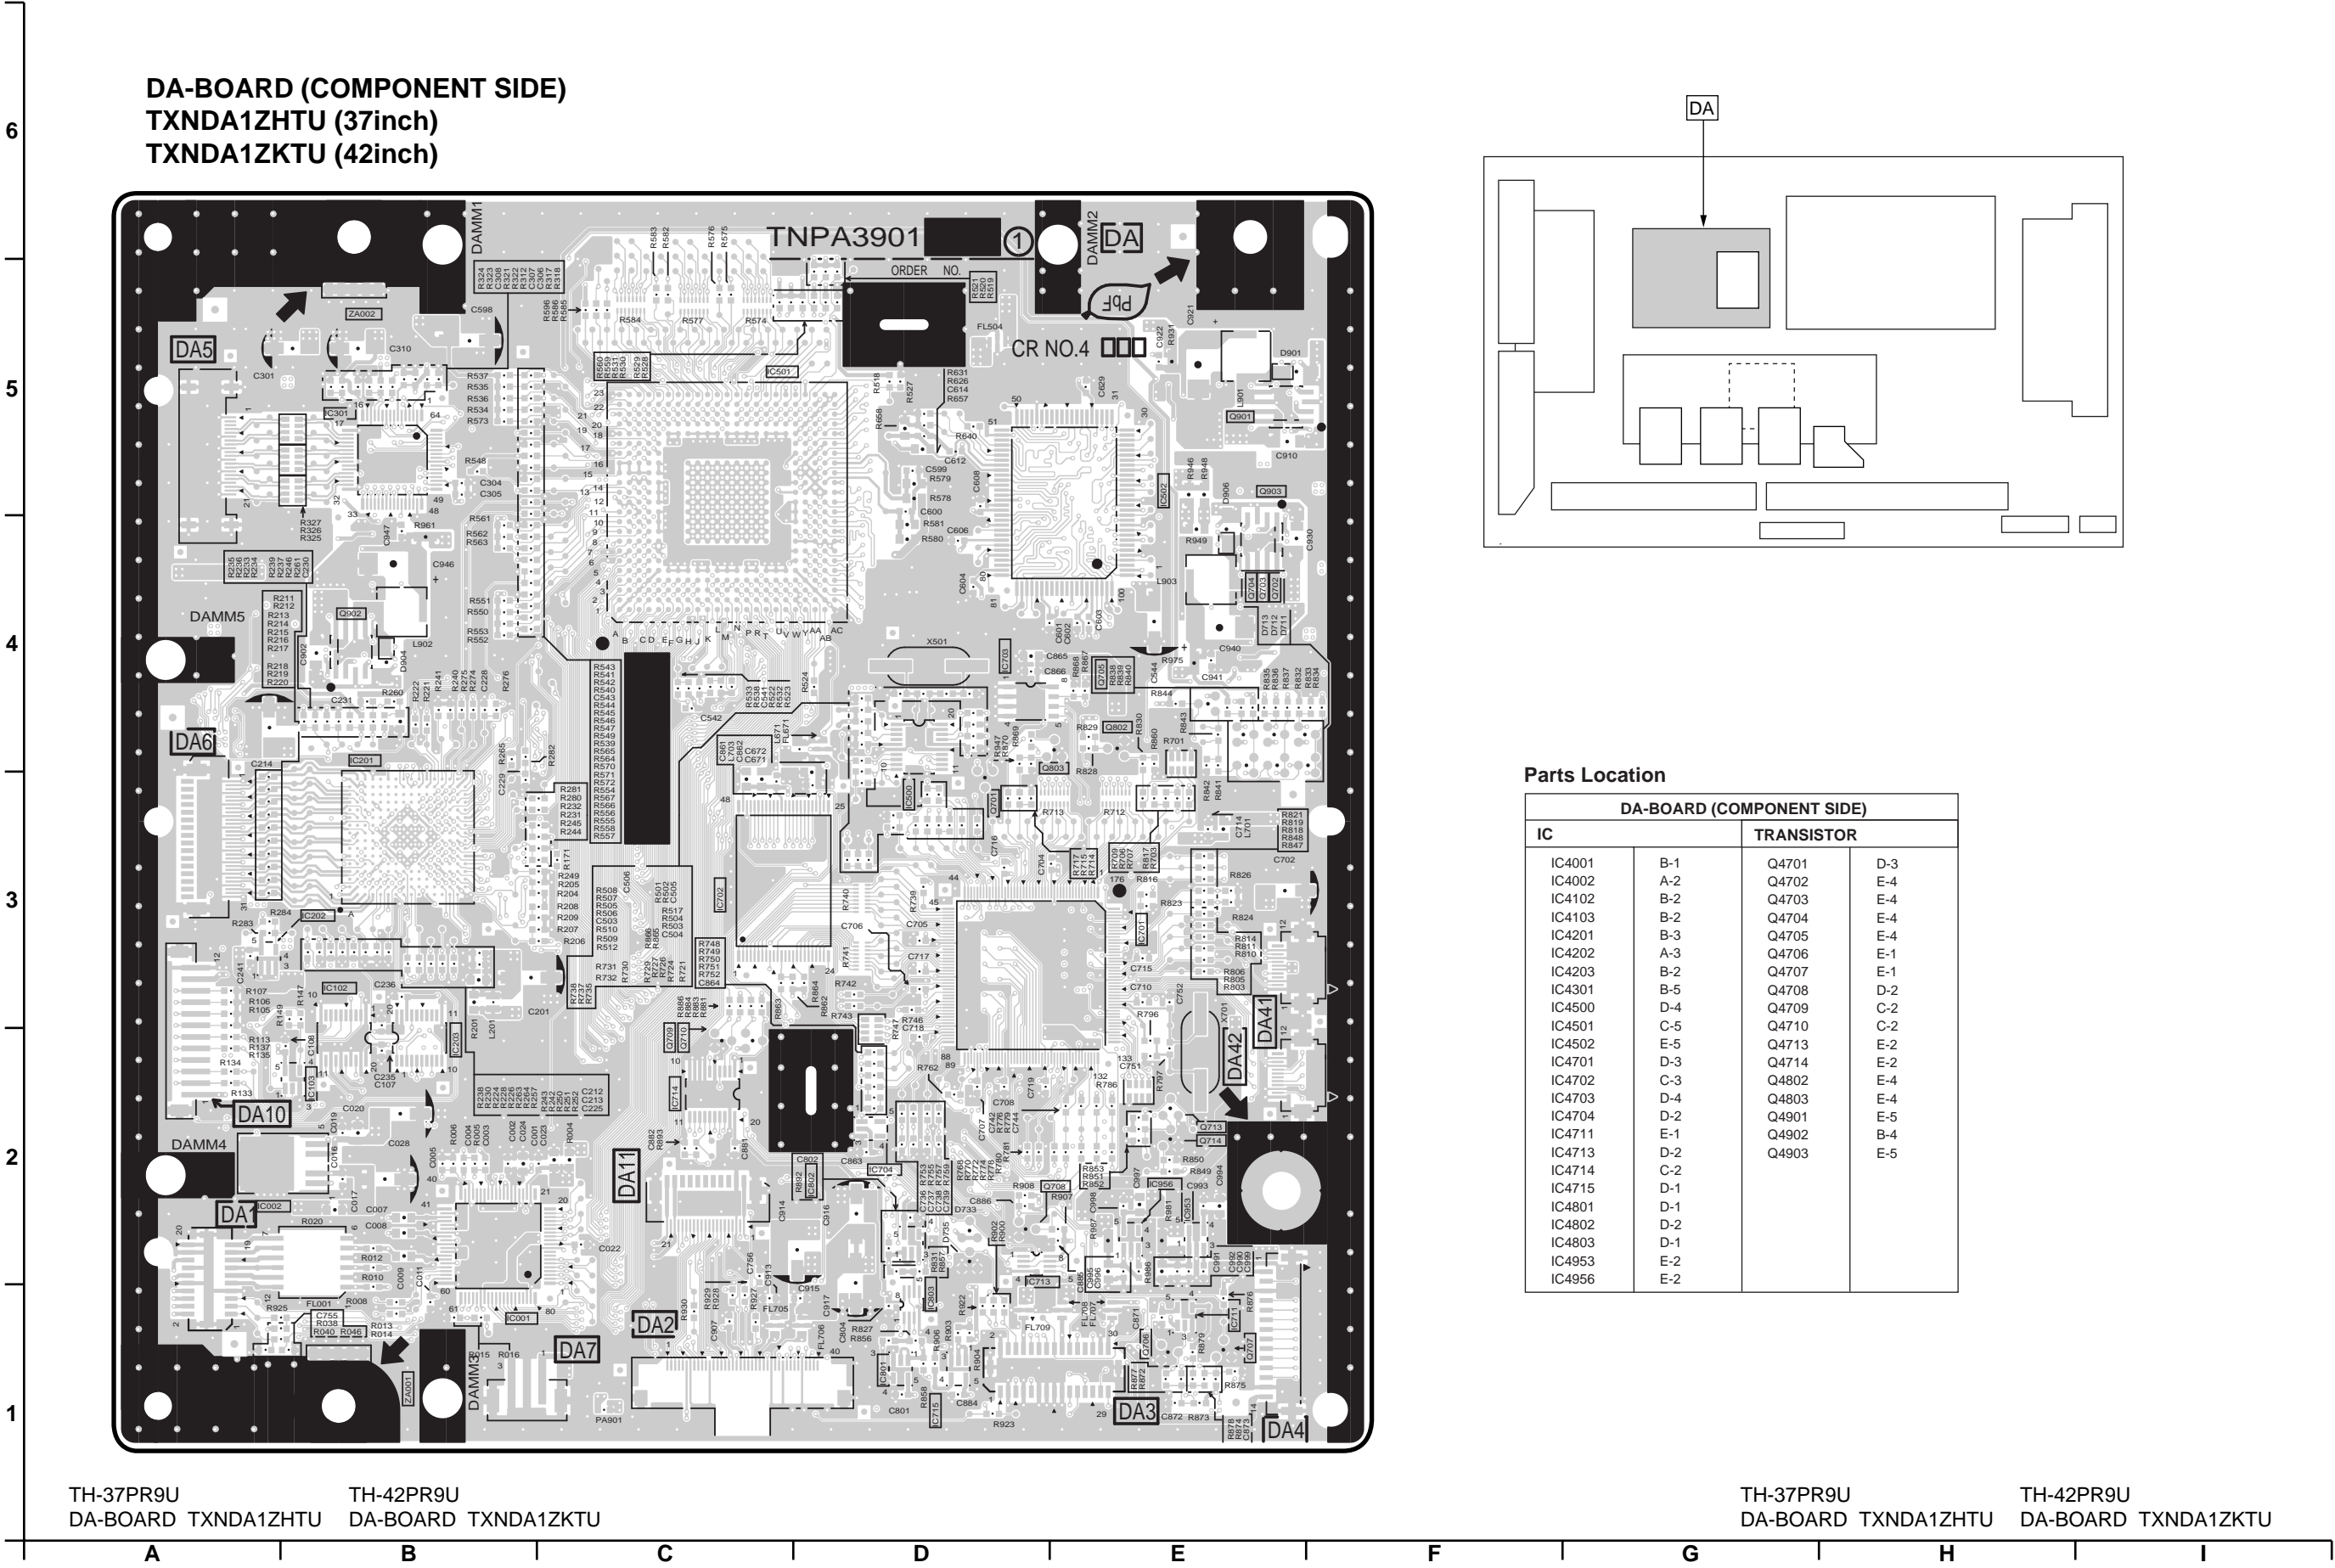




D-BOARD (FOIL SIDE)			
IC		TRANSISTOR	
IC9002	E-4	Q9010	D-5
IC9011	E-4	Q9044	E-3
IC9502	A-3	Q9045	E-3
IC9800	B-2	Q9046	E-3
IC9801	B-4	Q9047	E-3
IC9806	A-5	Q9048	E-3
IC9807	B-5	Q9049	D-3
IC9809	B-4	Q9055	D-5
		Q9056	D-5
		Q9057	E-4
		Q9058	E-4
		Q9060	D-5
		Q9300	D-2
		Q9301	E-2
		Q9302	E-2
		Q9500	C-4
		Q9805	B-5
		Q9806	C-5

TH-37PR9U	TH-42PR9U
D-BOARD TNPA3810AJS	D-BOARD TNPA3810AKS


D-BBOARD (COMPONENT SIDE)
TNPA3810AJS (37inch)
TNPA3810AKS (42inch)

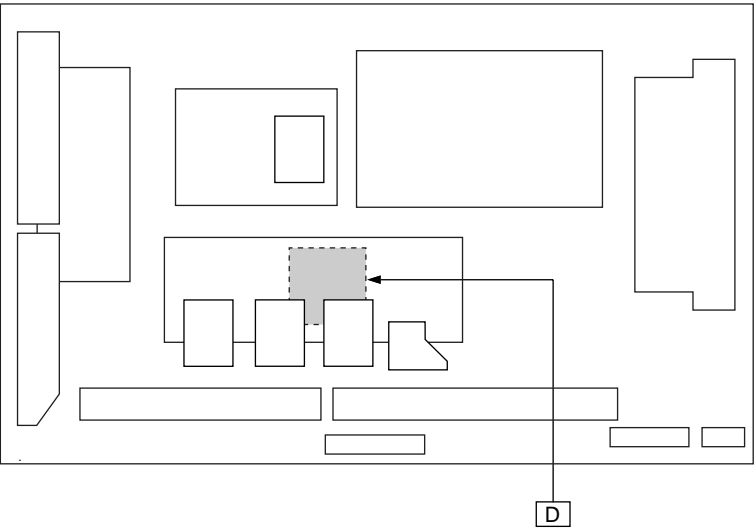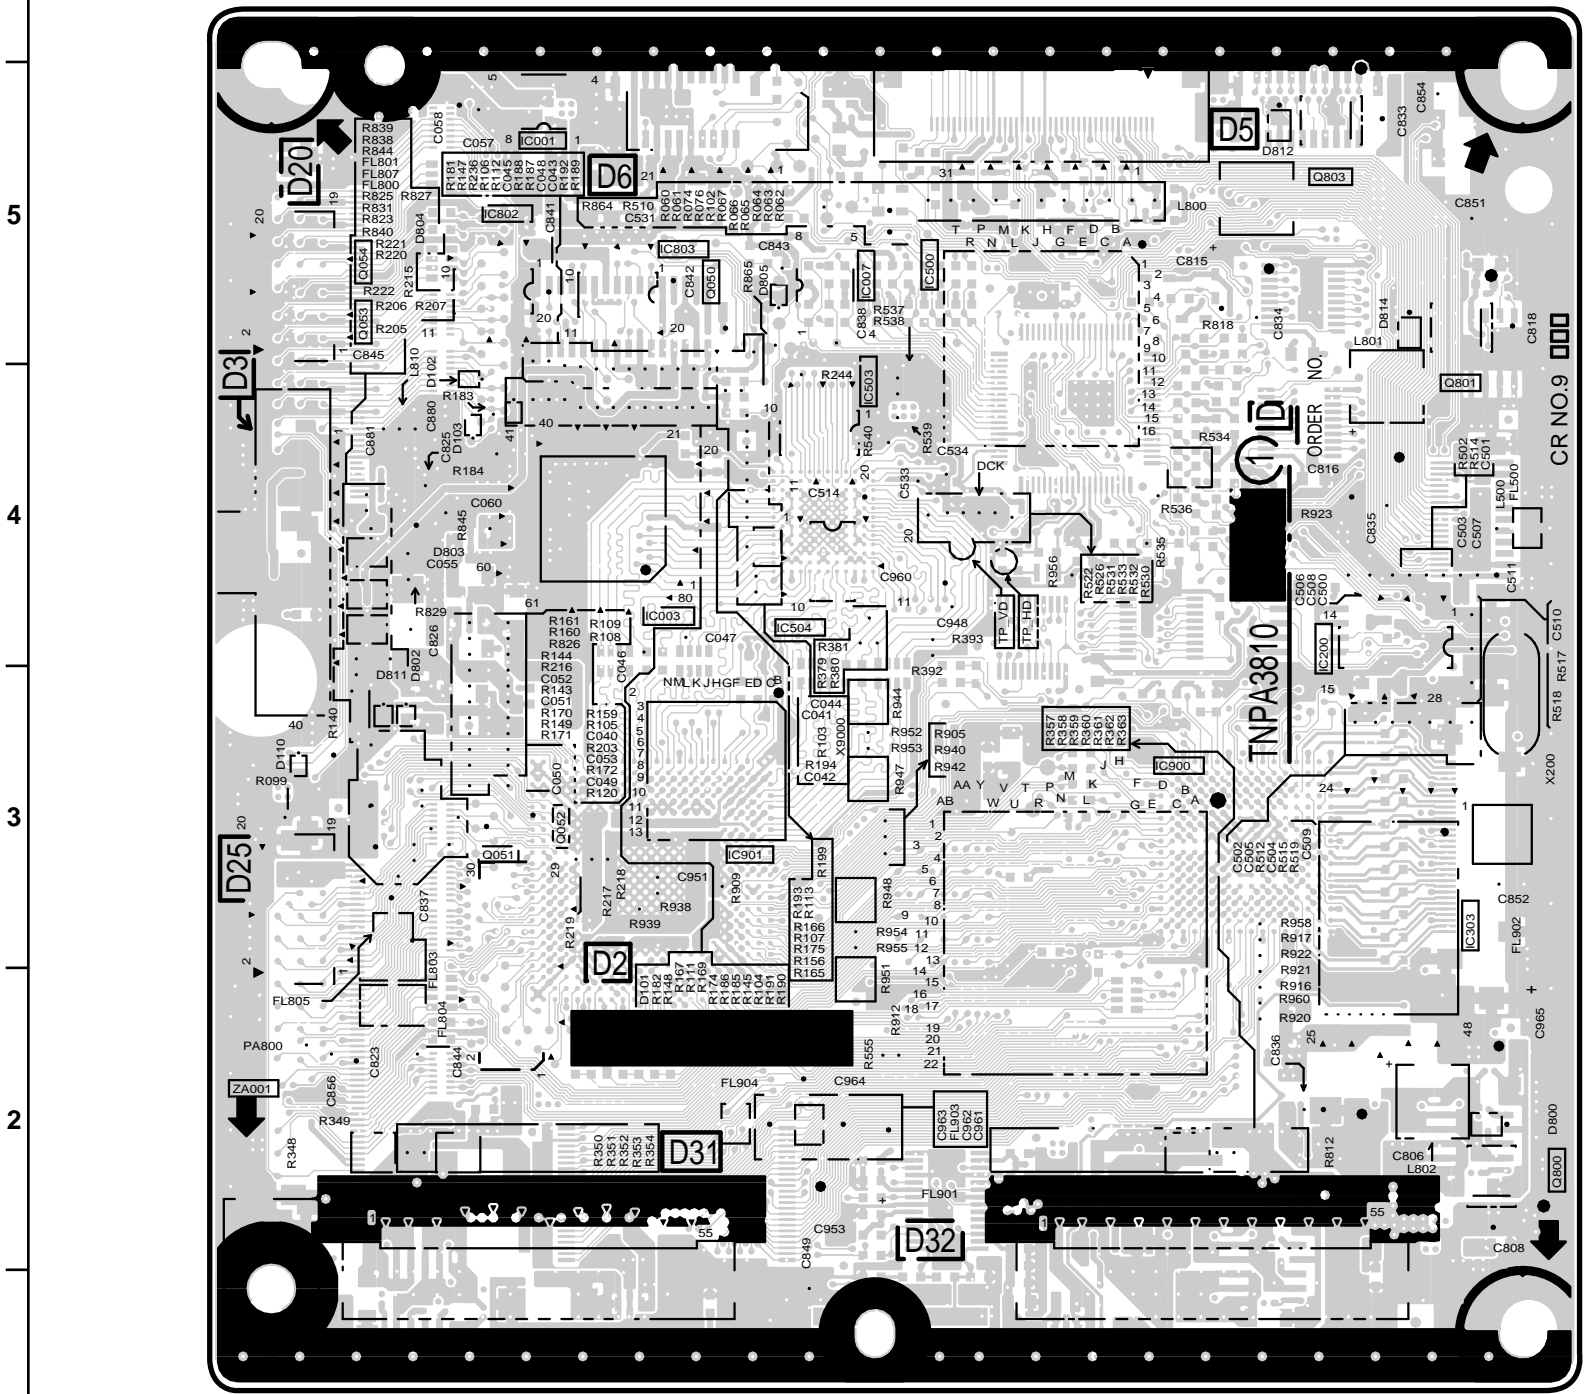

Parts Location

D-BBOARD (COMPONENT SIDE)			
IC		TRANSISTOR	
IC9001	B-5	Q9050	C-5
IC9003	C-4	Q9051	B-3
IC9007	C-5	Q9052	B-3
IC9200	E-4	Q9053	B-5
IC9303	E-3	Q9054	B-5
IC9500	D-5	Q9800	F-2
IC9503	C-4	Q9801	E-4
IC9504	C-4	Q9803	E-5
IC9802	B-5	TP	
IC9803	C-5		
IC9900	D-3		
IC9901	C-3	TP-HD	D-4
		TP-VD	D-4

14.9. C1-Board (37inch)

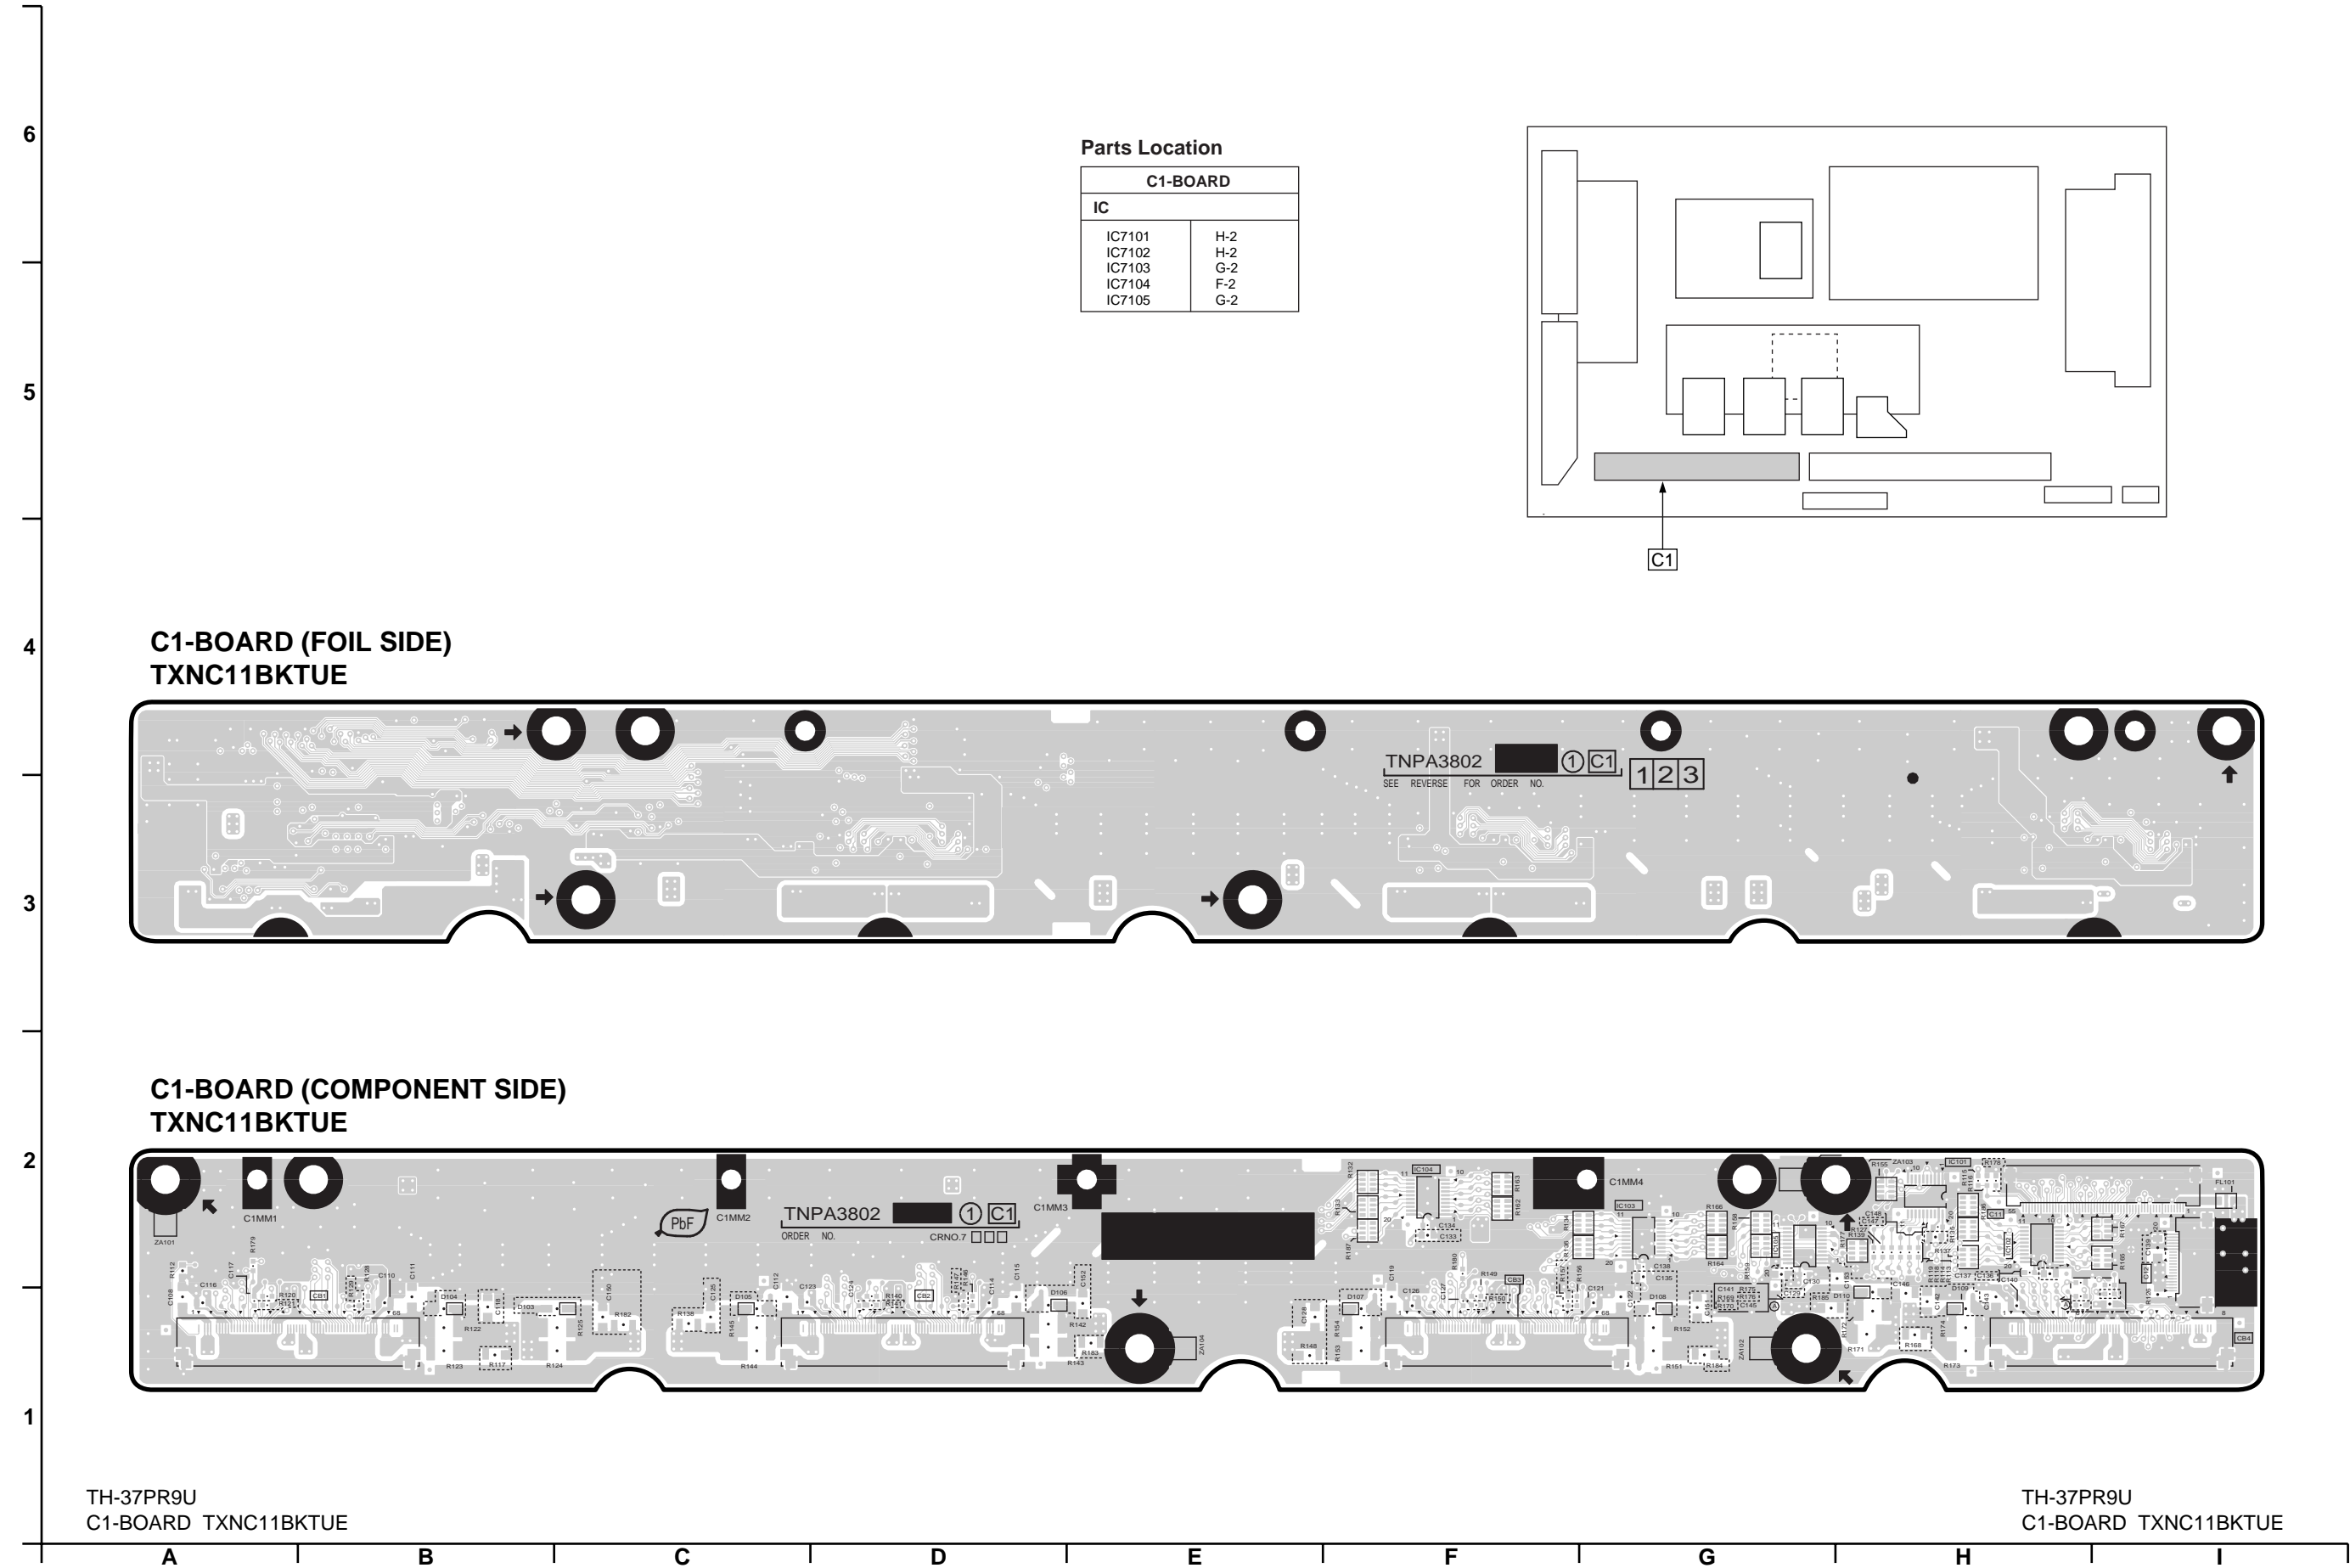


14.10. C1-Board (42inch)


6
5
4
3
2
1

Parts Location


C1-BOARD	
IC	
IC7101	H-2
IC7102	I-2
IC7103	G-2
IC7104	F-1
IC7105	H-2

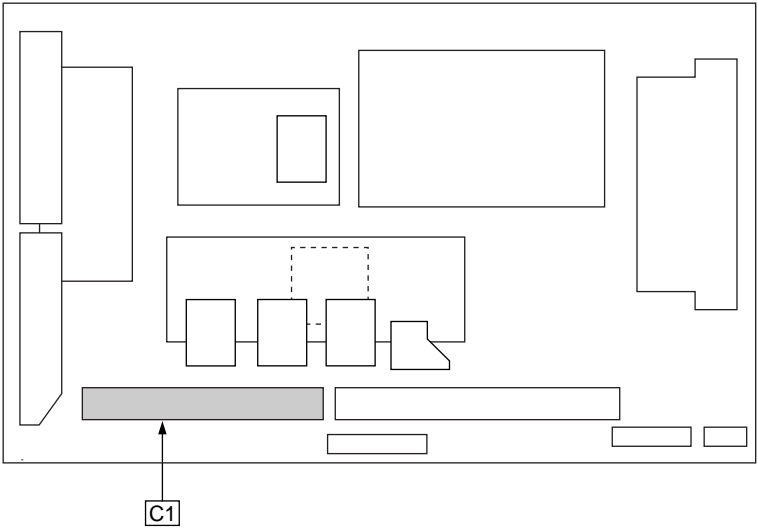

C1-BOARD (FOIL SIDE)
TXNC11BJTUE

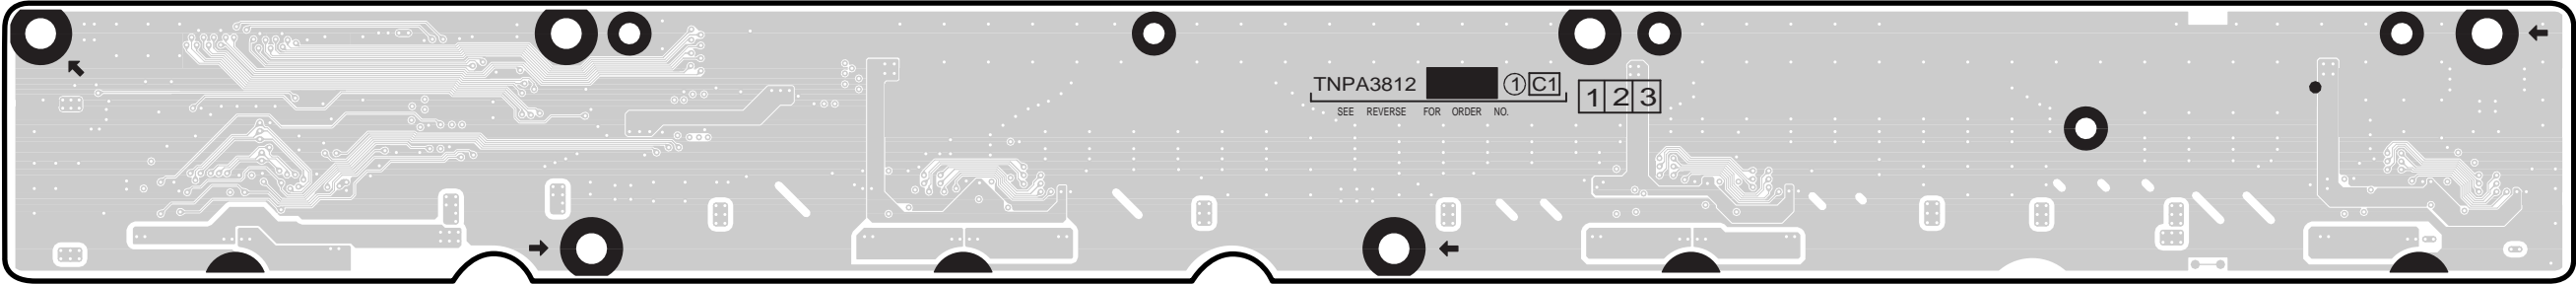

C1-BOARD (COMPONENT SIDE)
TXNC11BJTUE

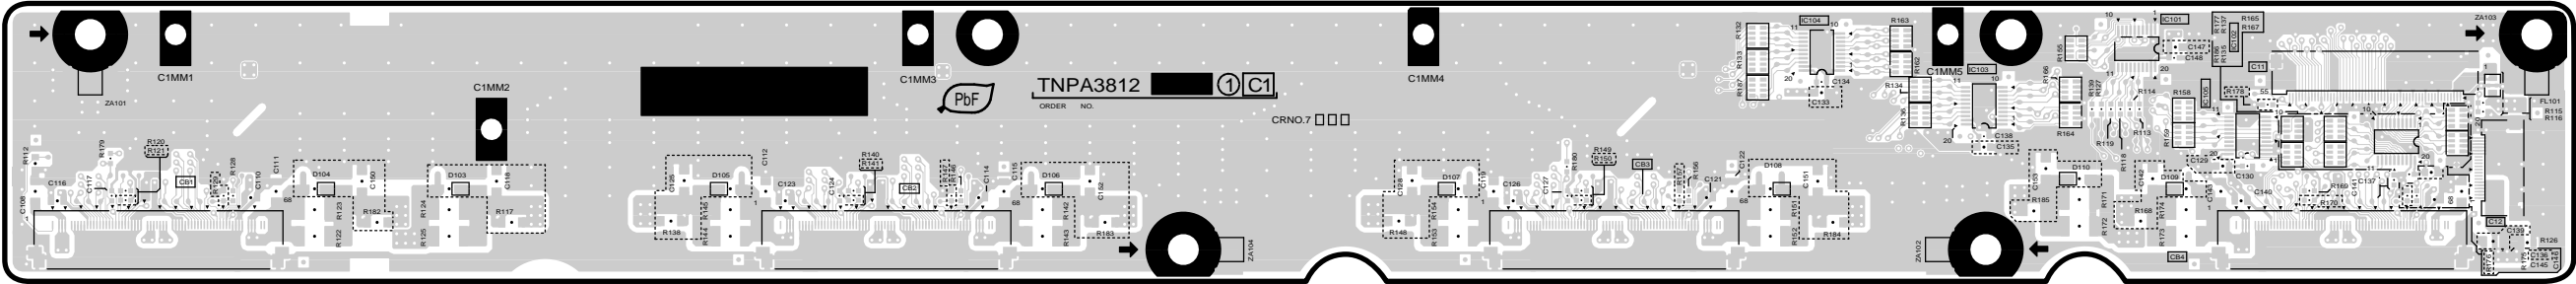

TH-42PR9U
C1-BOARD TXNC11BJTUE

TH-42PR9U
C1-BOARD TXNC11BJTUE

A B C D E F G H I

14.11. C2-Board (37inch)

6

5

4


3

2


1

Parts Location


C2-BOARD	
IC	
IC7201	B-2
IC7202	A-1
IC7203	C-2
IC7204	C-2
IC7205	B-2

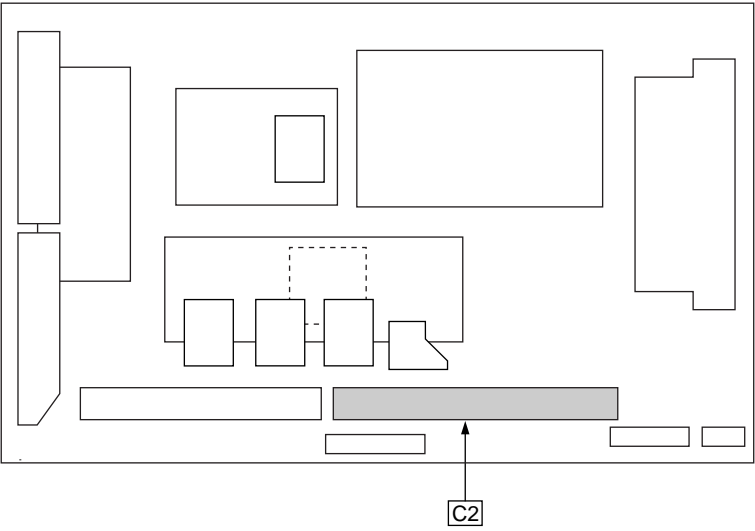

C2-BOARD (FOIL SIDE)
TXNC21BKTUE

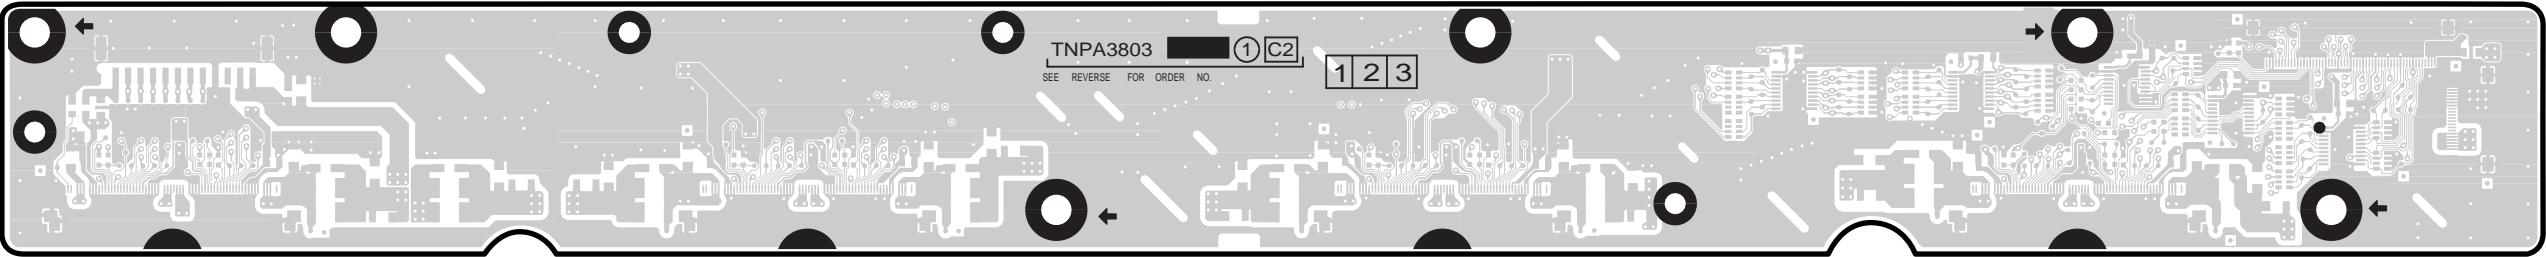

C2-BOARD (COMPONENT SIDE)
TXNC21BKTUE

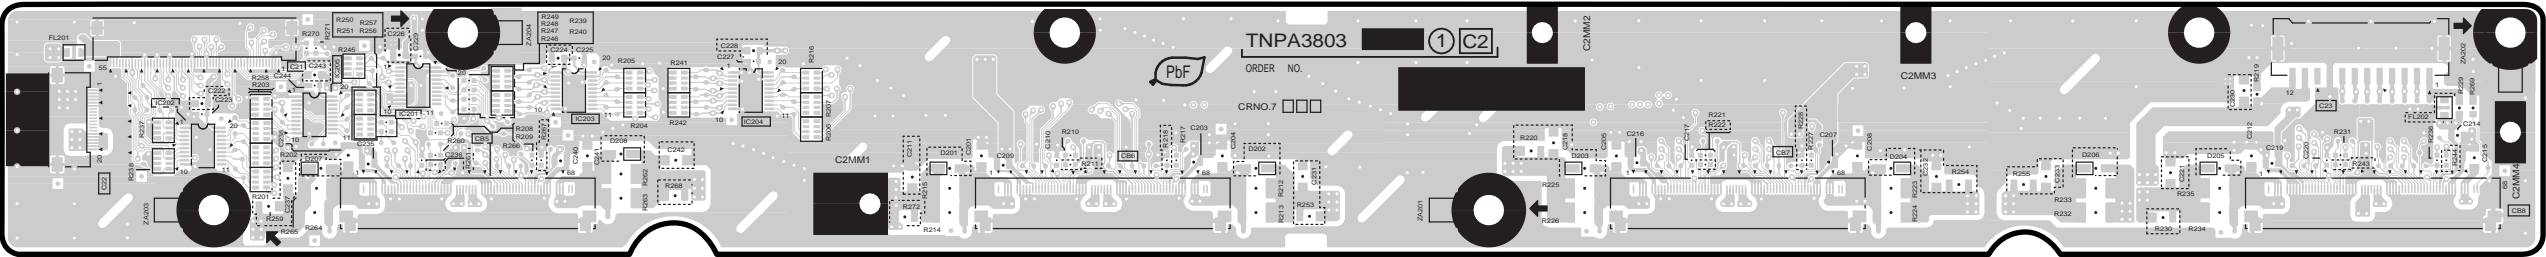

TH-37PR9U
C2-BOARD TXNC21BKTUE

TH-37PR9U
C2-BOARD TXNC21BKTUE

A

B

C

D

E

F

G


H

I


14.12. C2-Board (42inch)

6
5
4
3
2
1


C2-BOARD	
IC	
IC7201	B-2
IC7202	A-1
IC7203	B-2
IC7204	C-2
IC7205	B-1

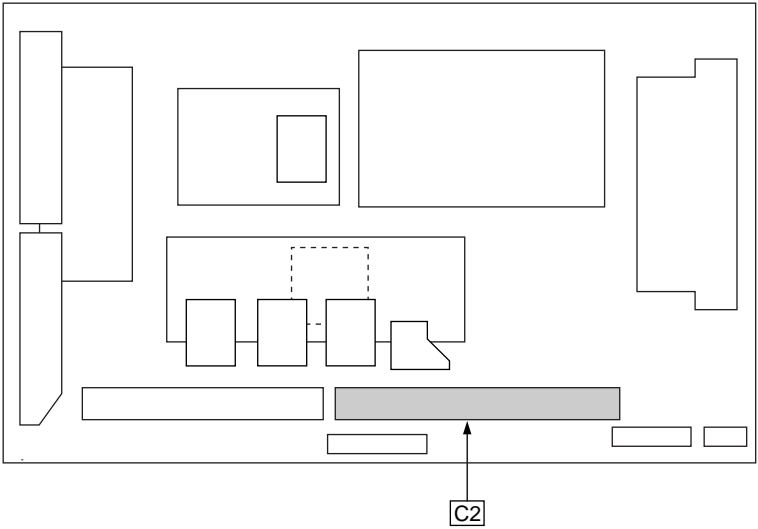

C2-BOARD (FOIL SIDE)
TXNC21BJTUE

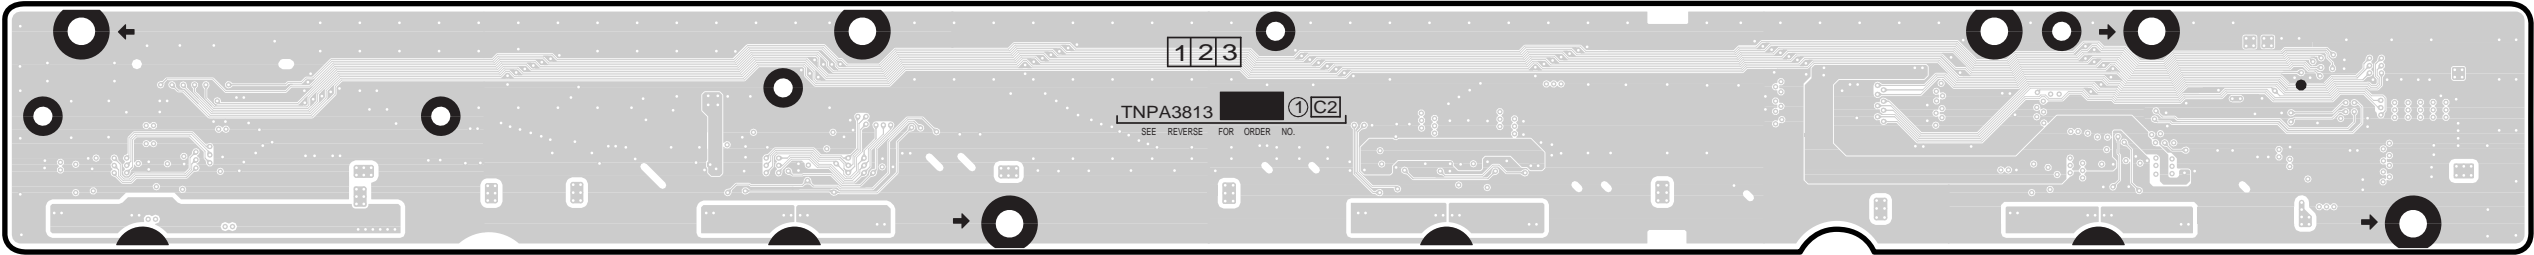

C2-BOARD (COMPONENT SIDE)
TXNC21BJTUE

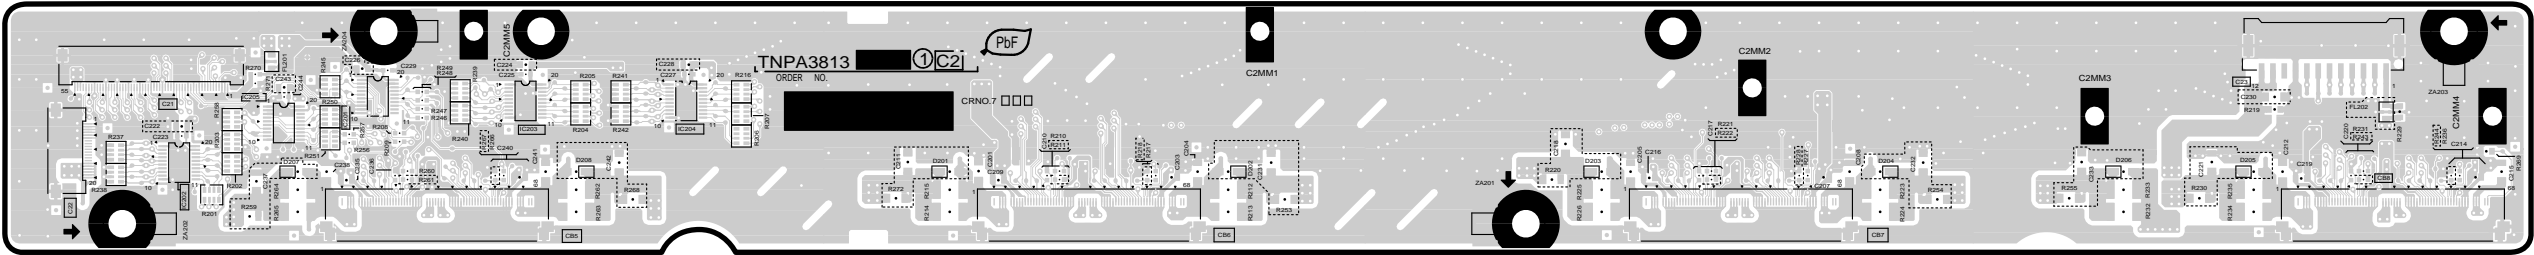


TH-42PR9U
C2-BOARD TXNC21BJTUE

TH-42PR9U
C2-BOARD TXNC21BJTUE

A B C D E F G H I



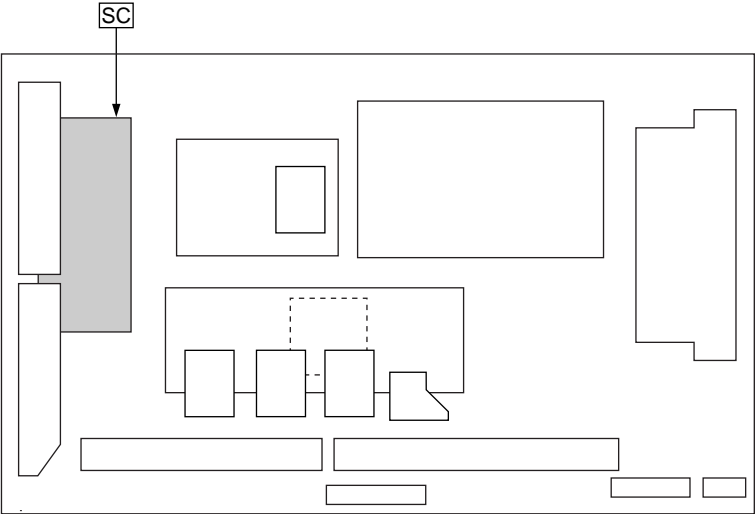

Parts Location

SC-BOARD (FOIL SIDE)					
TRANSISTOR		TP			
Q6401	B-4	TP1	A-1	TP41	D-5
Q6402	B-4	TP2	B-1	TP42	C-5
Q6403	C-4	TP4	B-2	TP43	C-5
Q6421	D-4	TP5	B-2	TP44	B-6
Q6422	D-4	TP6	C-1	TP45	C-5
Q6423	D-4	TP7	C-1	TP46	F-5
Q6441	E-2	TP8	B-2	TP47	F-5
Q6442	D-2	TP9	B-2	TP48	F-6
Q6451	C-2	TP10	F-2	TP49	F-6
Q6452	C-2	TP11	F-2	TP50	H-6
Q6661	F-4	TP12	G-1	TP51	G-6
Q6801	H-1	TP13	G-1	TP52	E-1
Q6821	E-3	TP14	E-2	TP53	G-4
Q6822	F-3	TP15	F-2	TP54	C-6
Q6841	H-3	TP16	G-1	TP55	C-6
Q6842	H-3	TP17	G-1	TP56	C-6
		TP18	F-2	TP57	B-6
		TP19	F-1	TP58	B-6
		TP20	F-2	TP59	G-6
		TP21	E-1	TP60	G-6
		TP22	F-2	TP61	G-6
		TP23	F-1	TP62	G-6
		TP24	F-1	TP63	G-6
		TP25	F-1	TP64	F-3
		TP26	E-1	VOLUME	
		TP27	F-1	VR6600	G-2
		TP28	H-2	VR6601	E-5
		TP29	H-5	VR6602	F-5
		TP30	A-5		
		TP31	H-4		
		TP32	E-5		
		TP33	B-3		
		TP34	E-1		
		TP35	E-3		
		TP38	F-1		
		TP39	E-1		
		TP40	D-5		


TH-37/42PR9U
SC-BOARD PARTS LOCATION

Parts Location

SC-BOARD (COMPONENT SIDE)							
IC		PHOTO COUPLER				TP	
IC6471	B-4	PC6480	A-4	Q6641	F-5	TP15V	G-1
IC6472	B-4	PC6701	A-4	Q6642	F-5	TPSC1	D-6
IC6501	G-4	PC6702	A-4	Q6643	F-5	TPSOS6	F-1
IC6521	F-2	PC6703	A-4	Q6644	G-5	TPSOS7	D-2
IC6561	C-1	PC6704	C-4	Q6645	G-5	TPVAD	C-4
IC6562	D-2	PC6705	B-4	Q6646	G-5	TPVSCN	C-4
IC6581	F-1	PC6760	C-4	Q6647	H-5	TPVSET	C-3
IC6601	E-5	PC6801	B-2	Q6648	H-5	TPVSET2	B-4
IC6602	A-4	PC6861	B-3	Q6661	D-4	TPVSUS	H-1
IC6610	B-5	PC6871	C-1	Q6662	C-5	VOLUME	
IC6671	D-4	TRANSISTOR		Q6663	C-4	VR6600	C-2
IC6681	D-5	Q6401	H-4	Q6671	E-4	VR6601	D-4
IC6682	A-4	Q6402	H-4	Q6672	F-4	VR6602	D-5
IC6721	A-5	Q6403	G-4	Q6680	E-4		
IC6722	A-4	Q6421	F-4	Q6681	D-5		
IC6724	C-5	Q6422	F-4	Q6682	D-5		
IC6725	C-5	Q6423	E-4	Q6691	D-5		
IC6751	C-4	Q6441	E-2	Q6742	A-5		
IC6752	C-4	Q6442	E-2	Q6743	B-5		
IC6753	C-4	Q6451	G-2	Q6744	A-5		
IC6771	C-5	Q6452	G-2	Q6762	F-4		
IC6772	C-5	Q6471	B-3	Q6781	F-5		
IC6773	C-5	Q6511	G-4	Q6782	F-5		
IC6774	C-4	Q6512	G-4	Q6791	B-2		
IC6791	C-2	Q6516	F-4	Q6801	B-1		
IC6801	C-2	Q6517	F-4	Q6802	B-1		
IC6802	C-2	Q6531	F-2	Q6803	B-2		
IC6821	C-3	Q6532	F-2	Q6804	B-1		
IC6841	A-3	Q6551	F-2	Q6821	D-3		
IC6861	B-5	Q6552	G-2	Q6822	D-3		
IC6871	B-2	Q6581	F-1	Q6824	C-3		
		Q6601	E-5	Q6841	B-3		
		Q6602	D-5	Q6842	A-3		
		Q6621	F-4				
		Q6622	G-4				

TH-37/42PR9U
SC-BOARD PARTS LOCATION

SC-BEARD (COMPONENT SIDE)
TXNSC1BKTUE (37inch)
TXNSC1BJTUE (42inch)

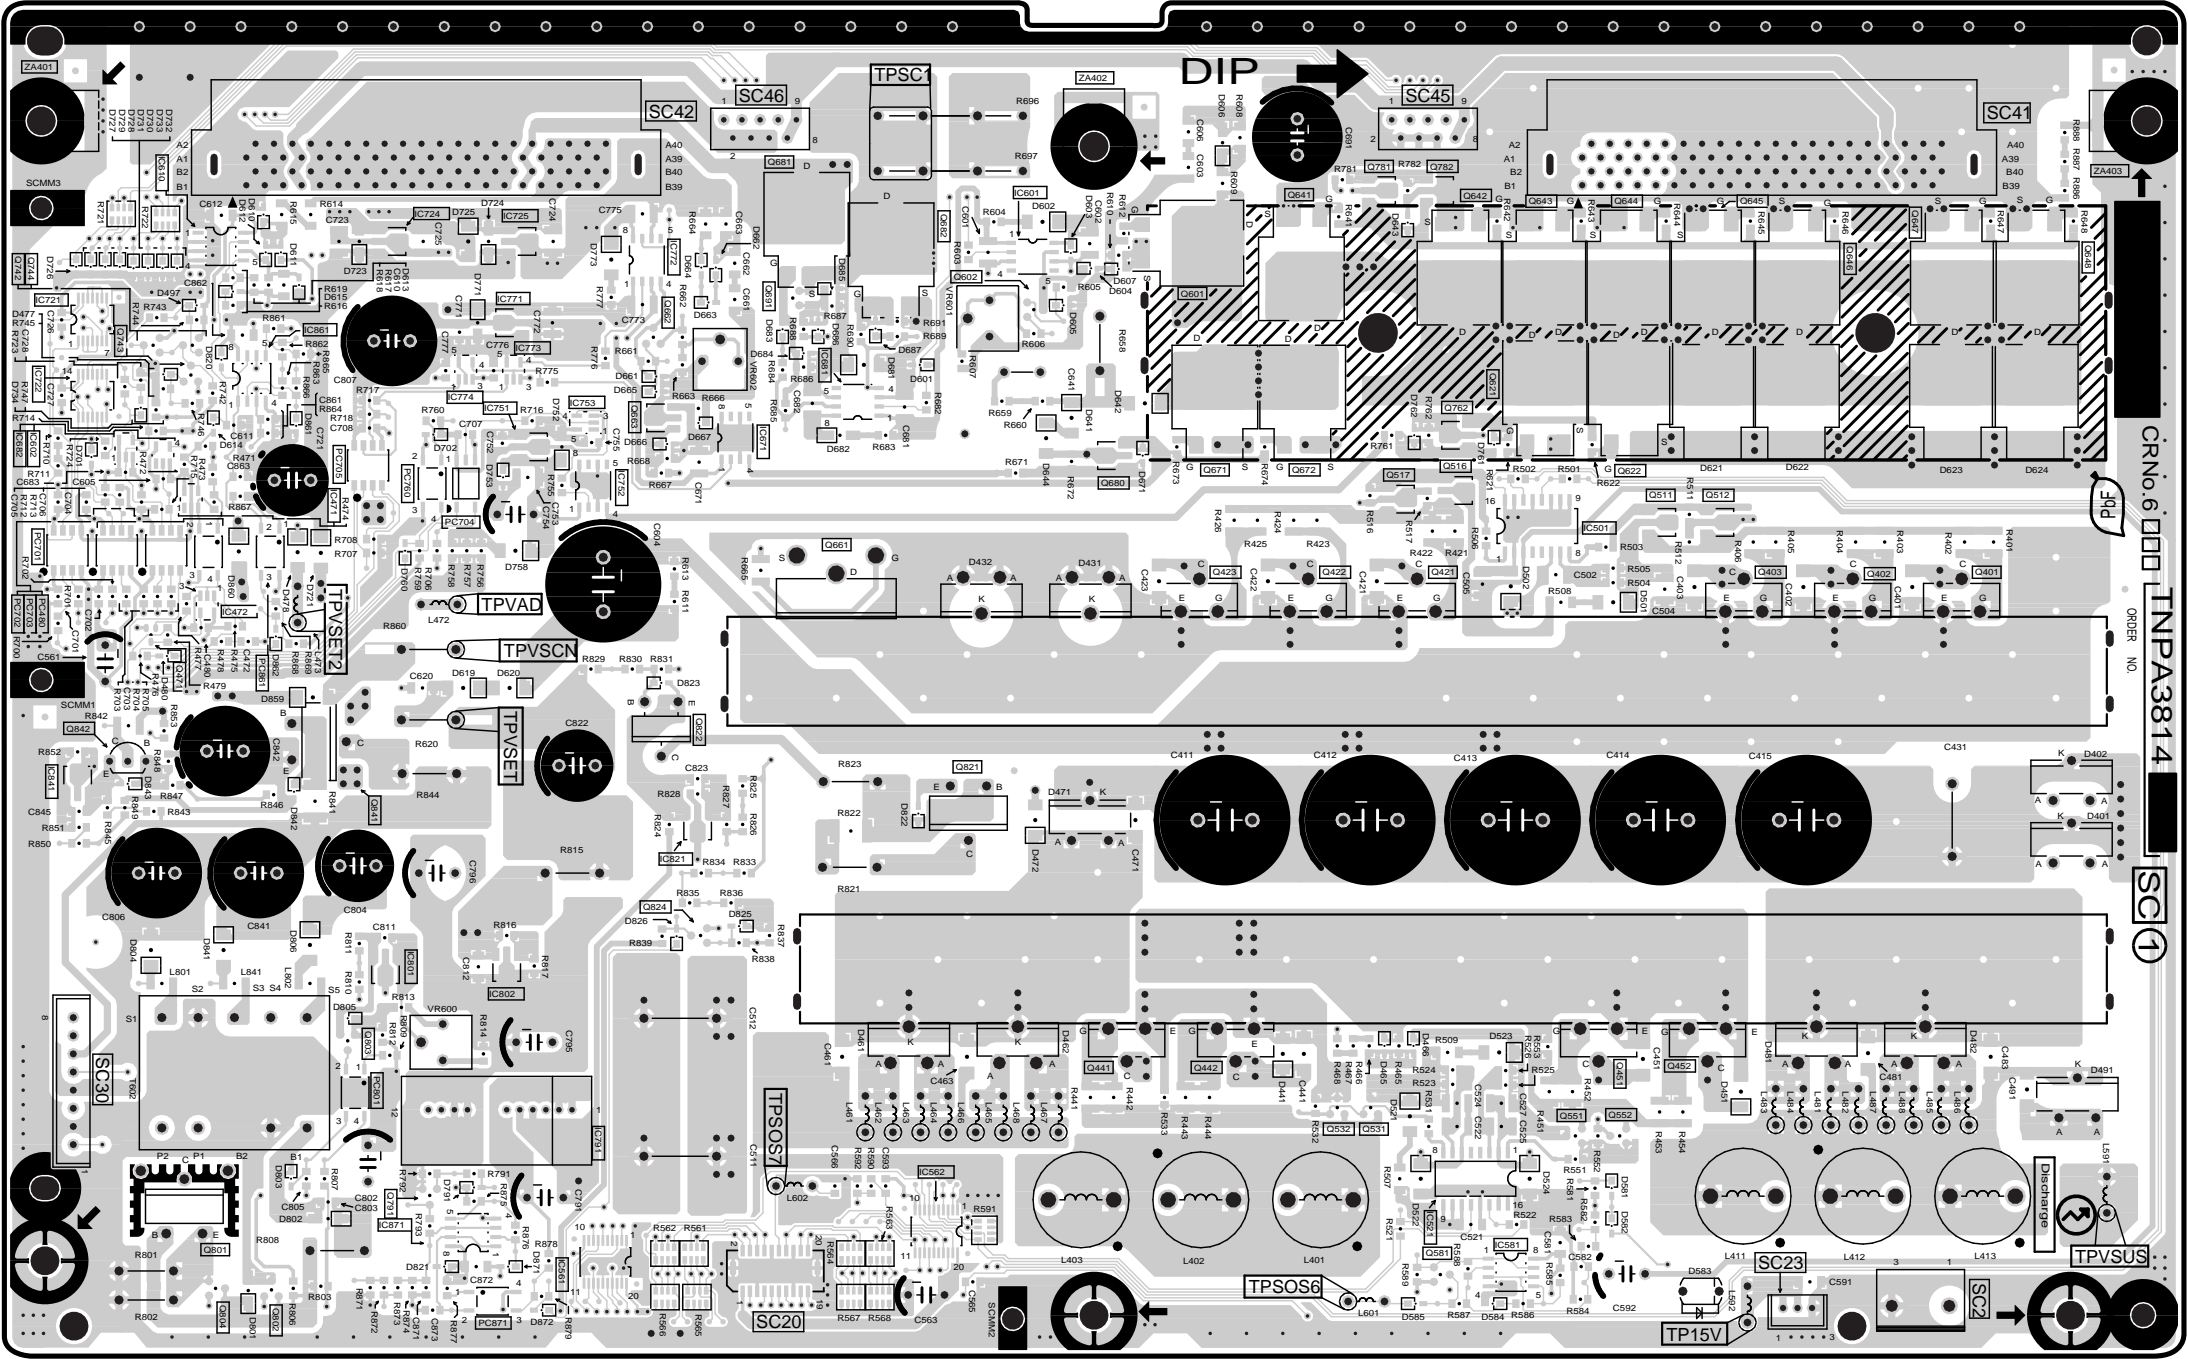


CRN0.6 INPA3814 SC1

TH-37PR9U	TH-42PR9U	TH-37PR9U	TH-42PR9U
SC-BEARD TXNSC1BKTUE	SC-BEARD TXNSC1BJTUE	SC-BEARD TXNSC1BKTUE	SC-BEARD TXNSC1BJTUE
A	B	C	D
E	F	G	H
I			

The diagram shows a floor plan with several rooms and a central corridor. A label 'SU' with an arrow points to a room on the left side of the plan. The plan includes a large central room, a smaller room to its left, and a long narrow room on the right. There are also several smaller rooms and a central corridor area.

14.15. SU-Board (42inch)

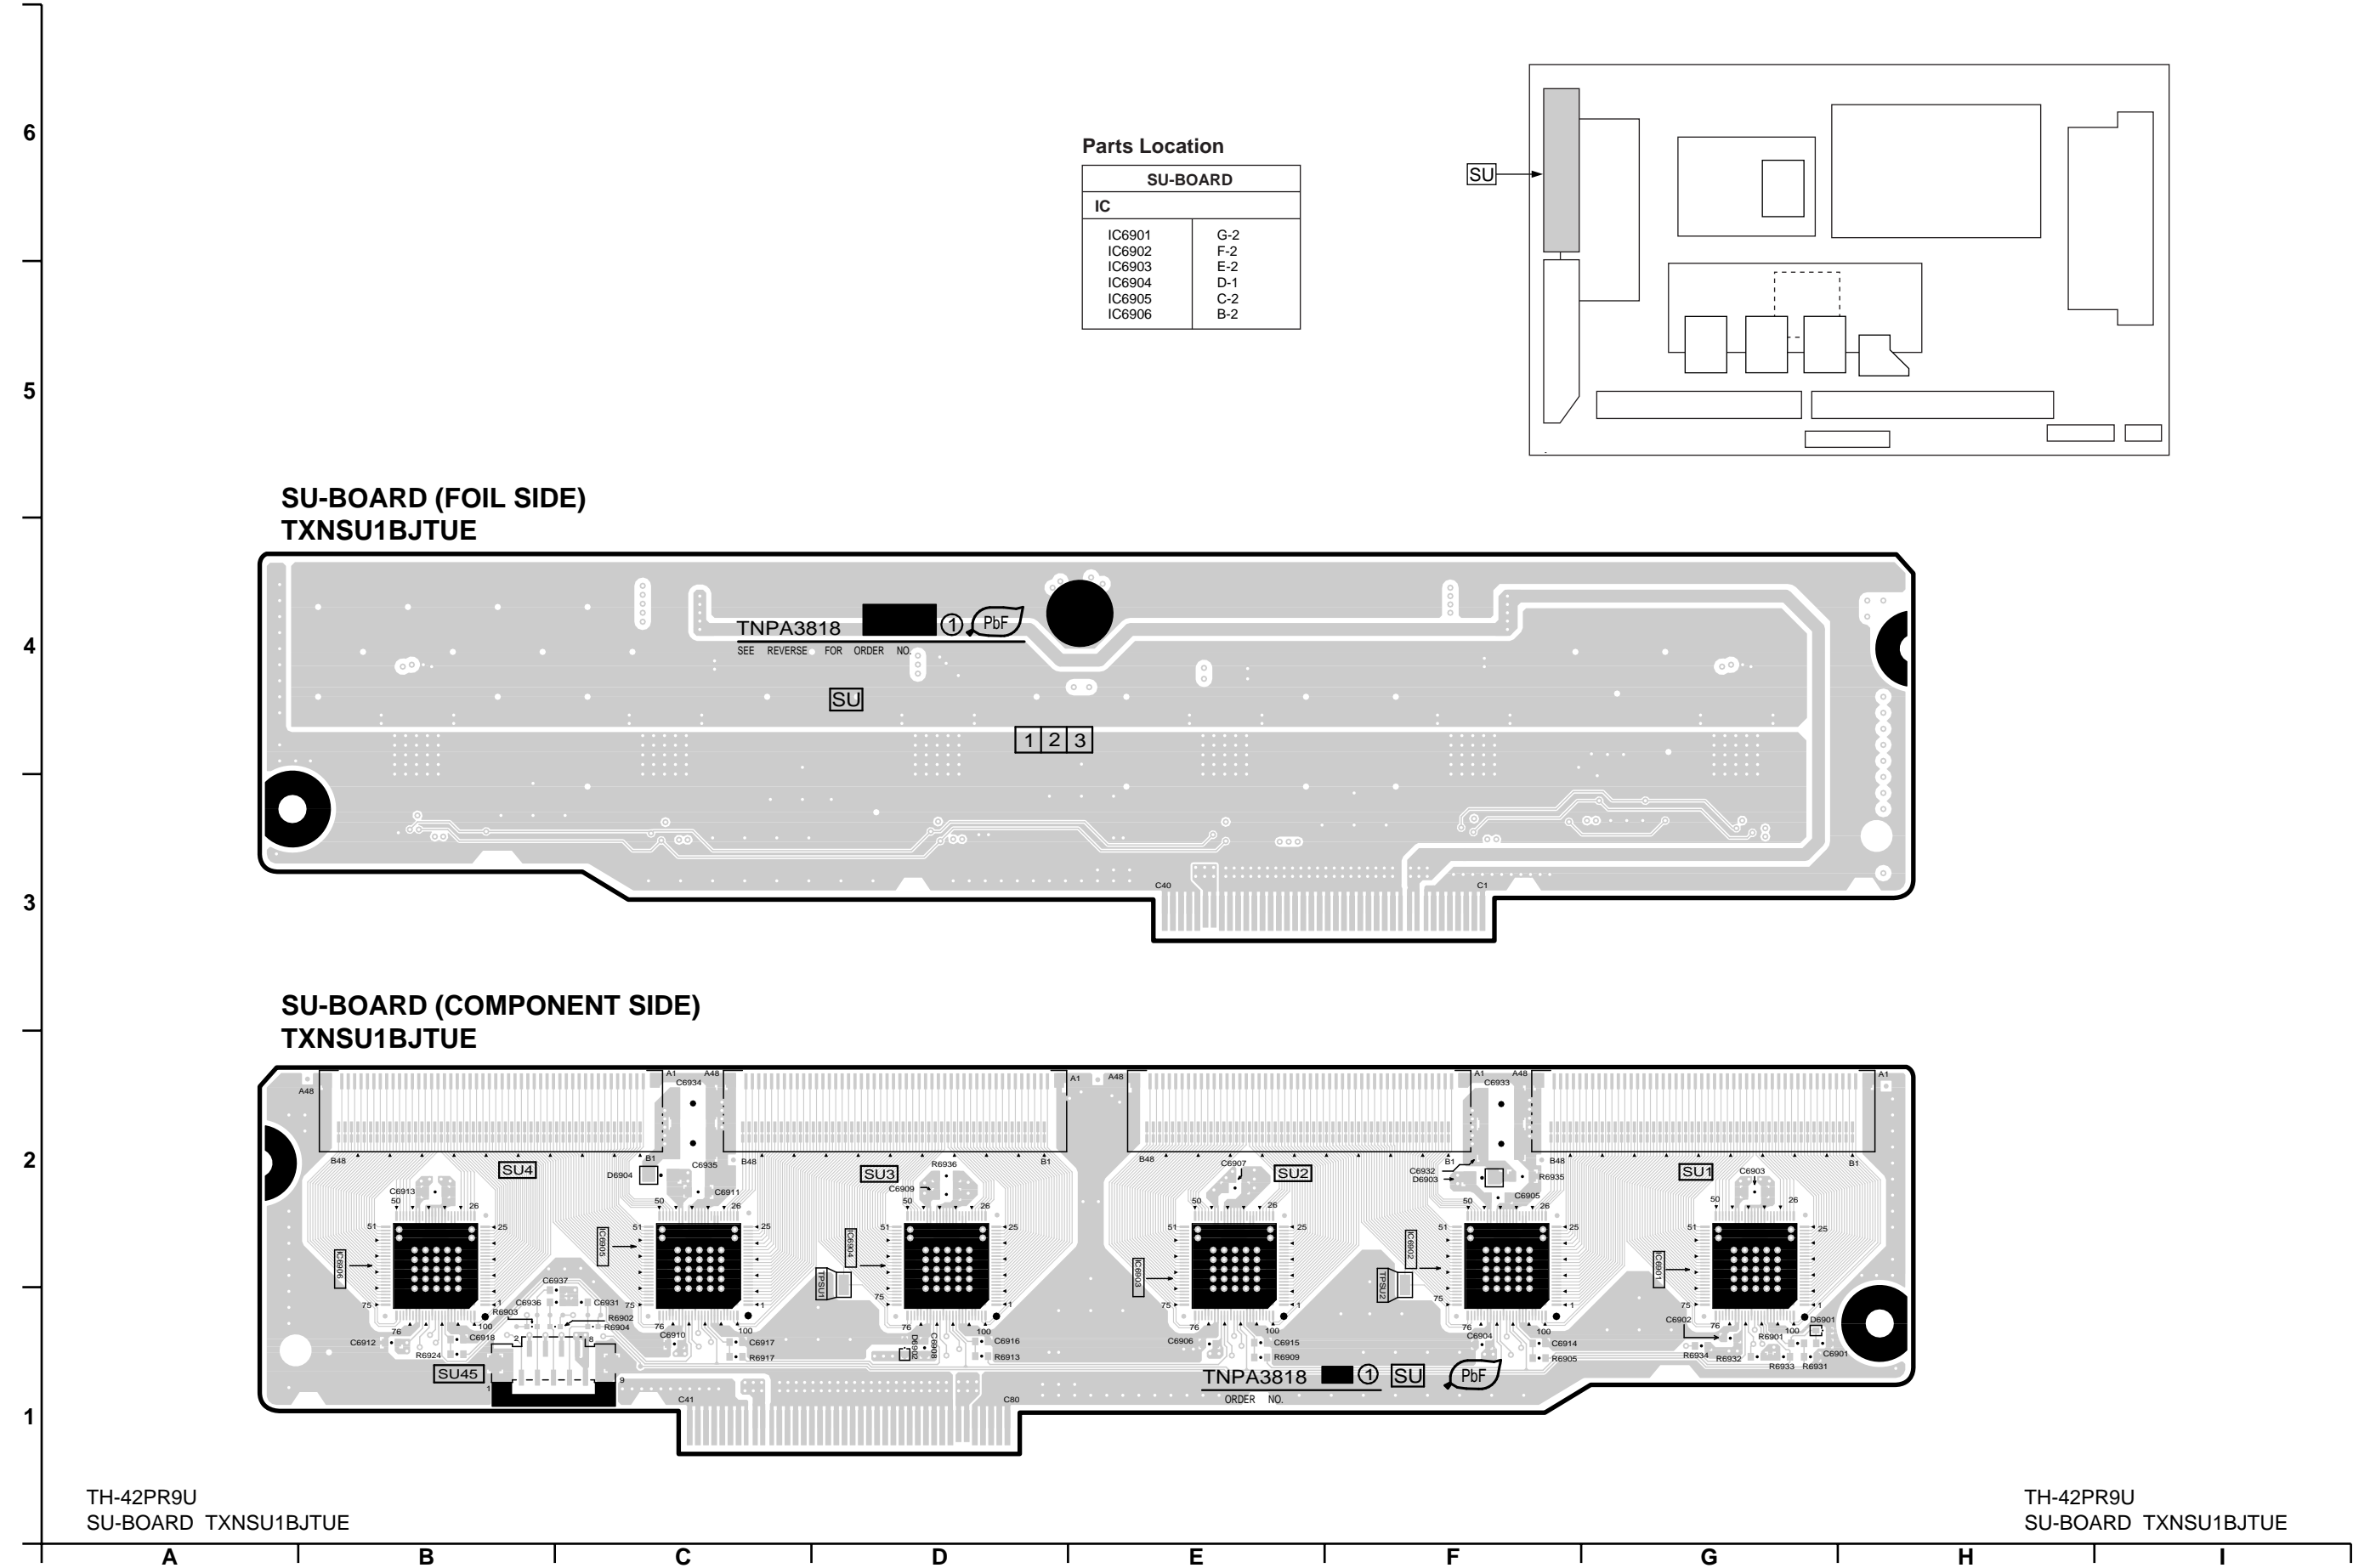

14.16. SD-Board (37inch)

6

5

4


3

2


1

Parts Location


SD-BOARD	
IC	
IC6951	G-2
IC6952	C-4
IC6953	E-2
IC6954	E-4
IC6955	C-2
IC6956	G-4

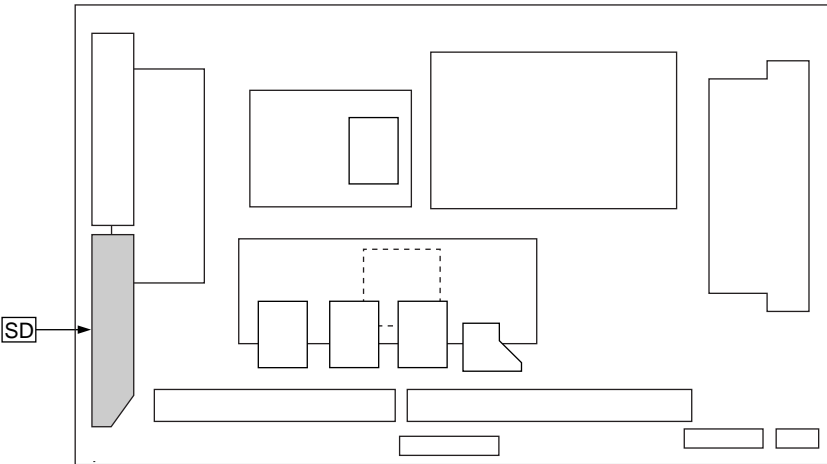

SD-BOARD (FOIL SIDE)
TXNSD1BKTUE

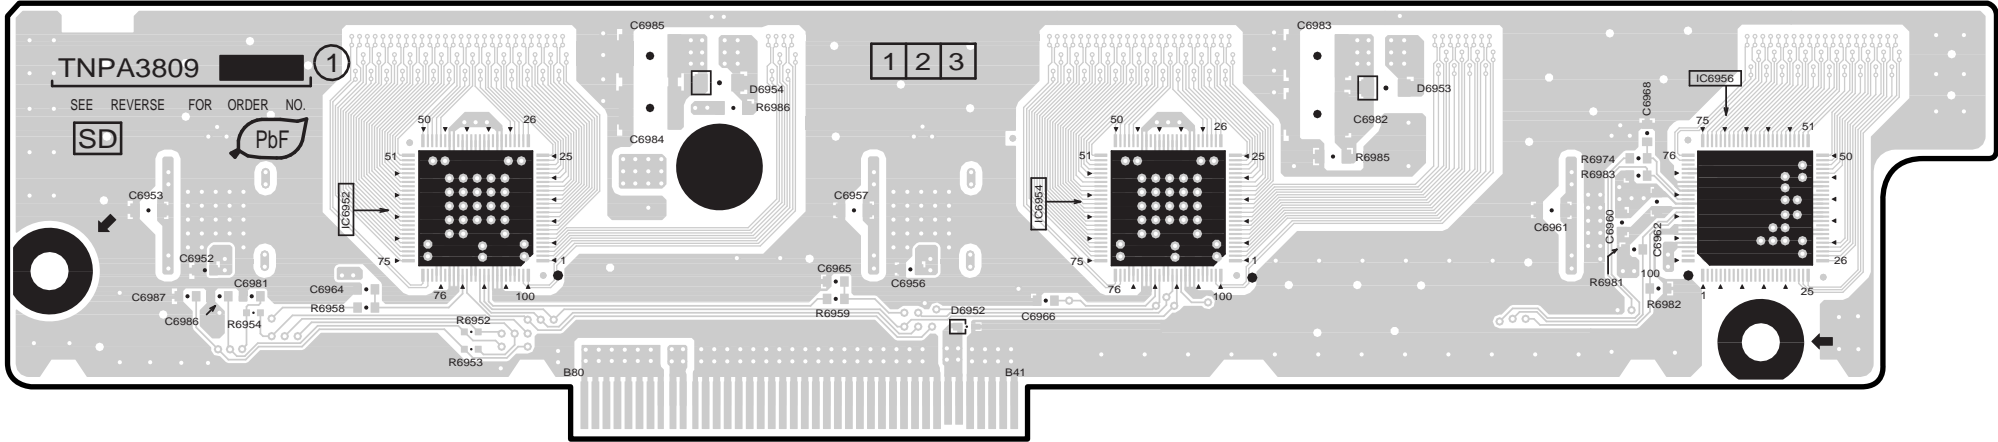

SD-BOARD (COMPONENT SIDE)
TXNSD1BKTUE

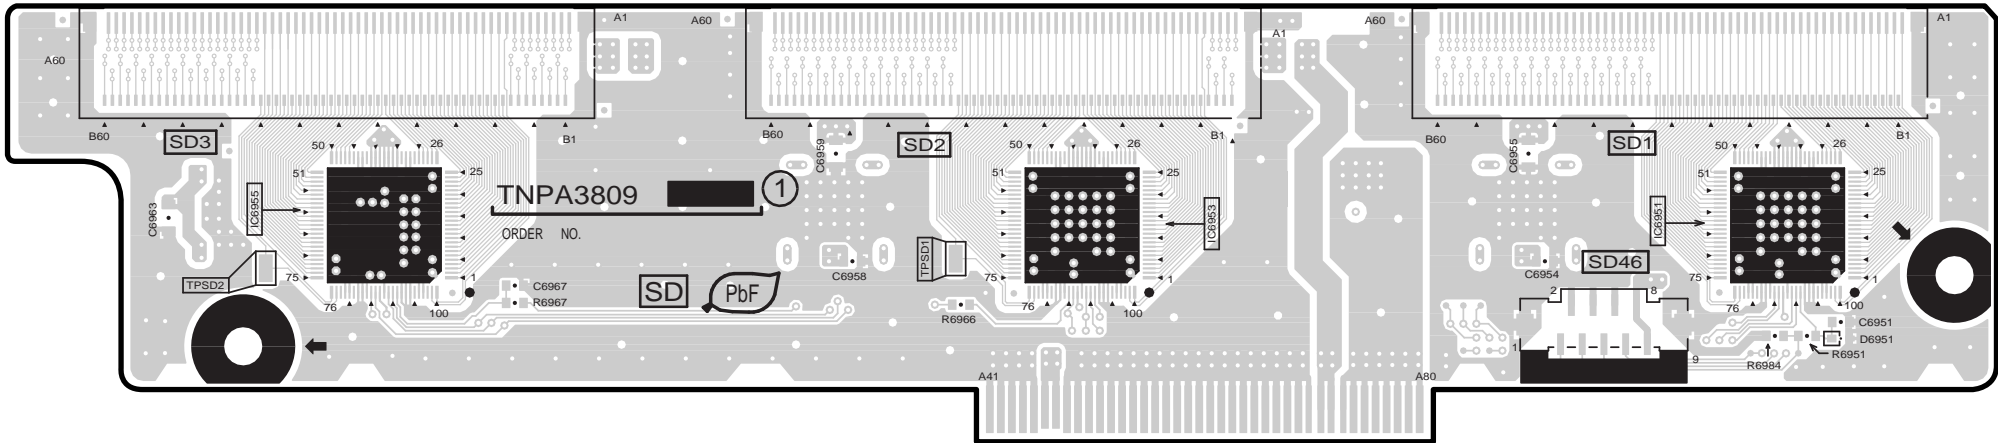

TH-37PR9U
SD-BOARD TXNSD1BKTUE

TH-37PR9U
SD-BOARD TXNSD1BKTUE

A

B

C

D

E


F

G

H

I

14.17. SD-Board (42inch)

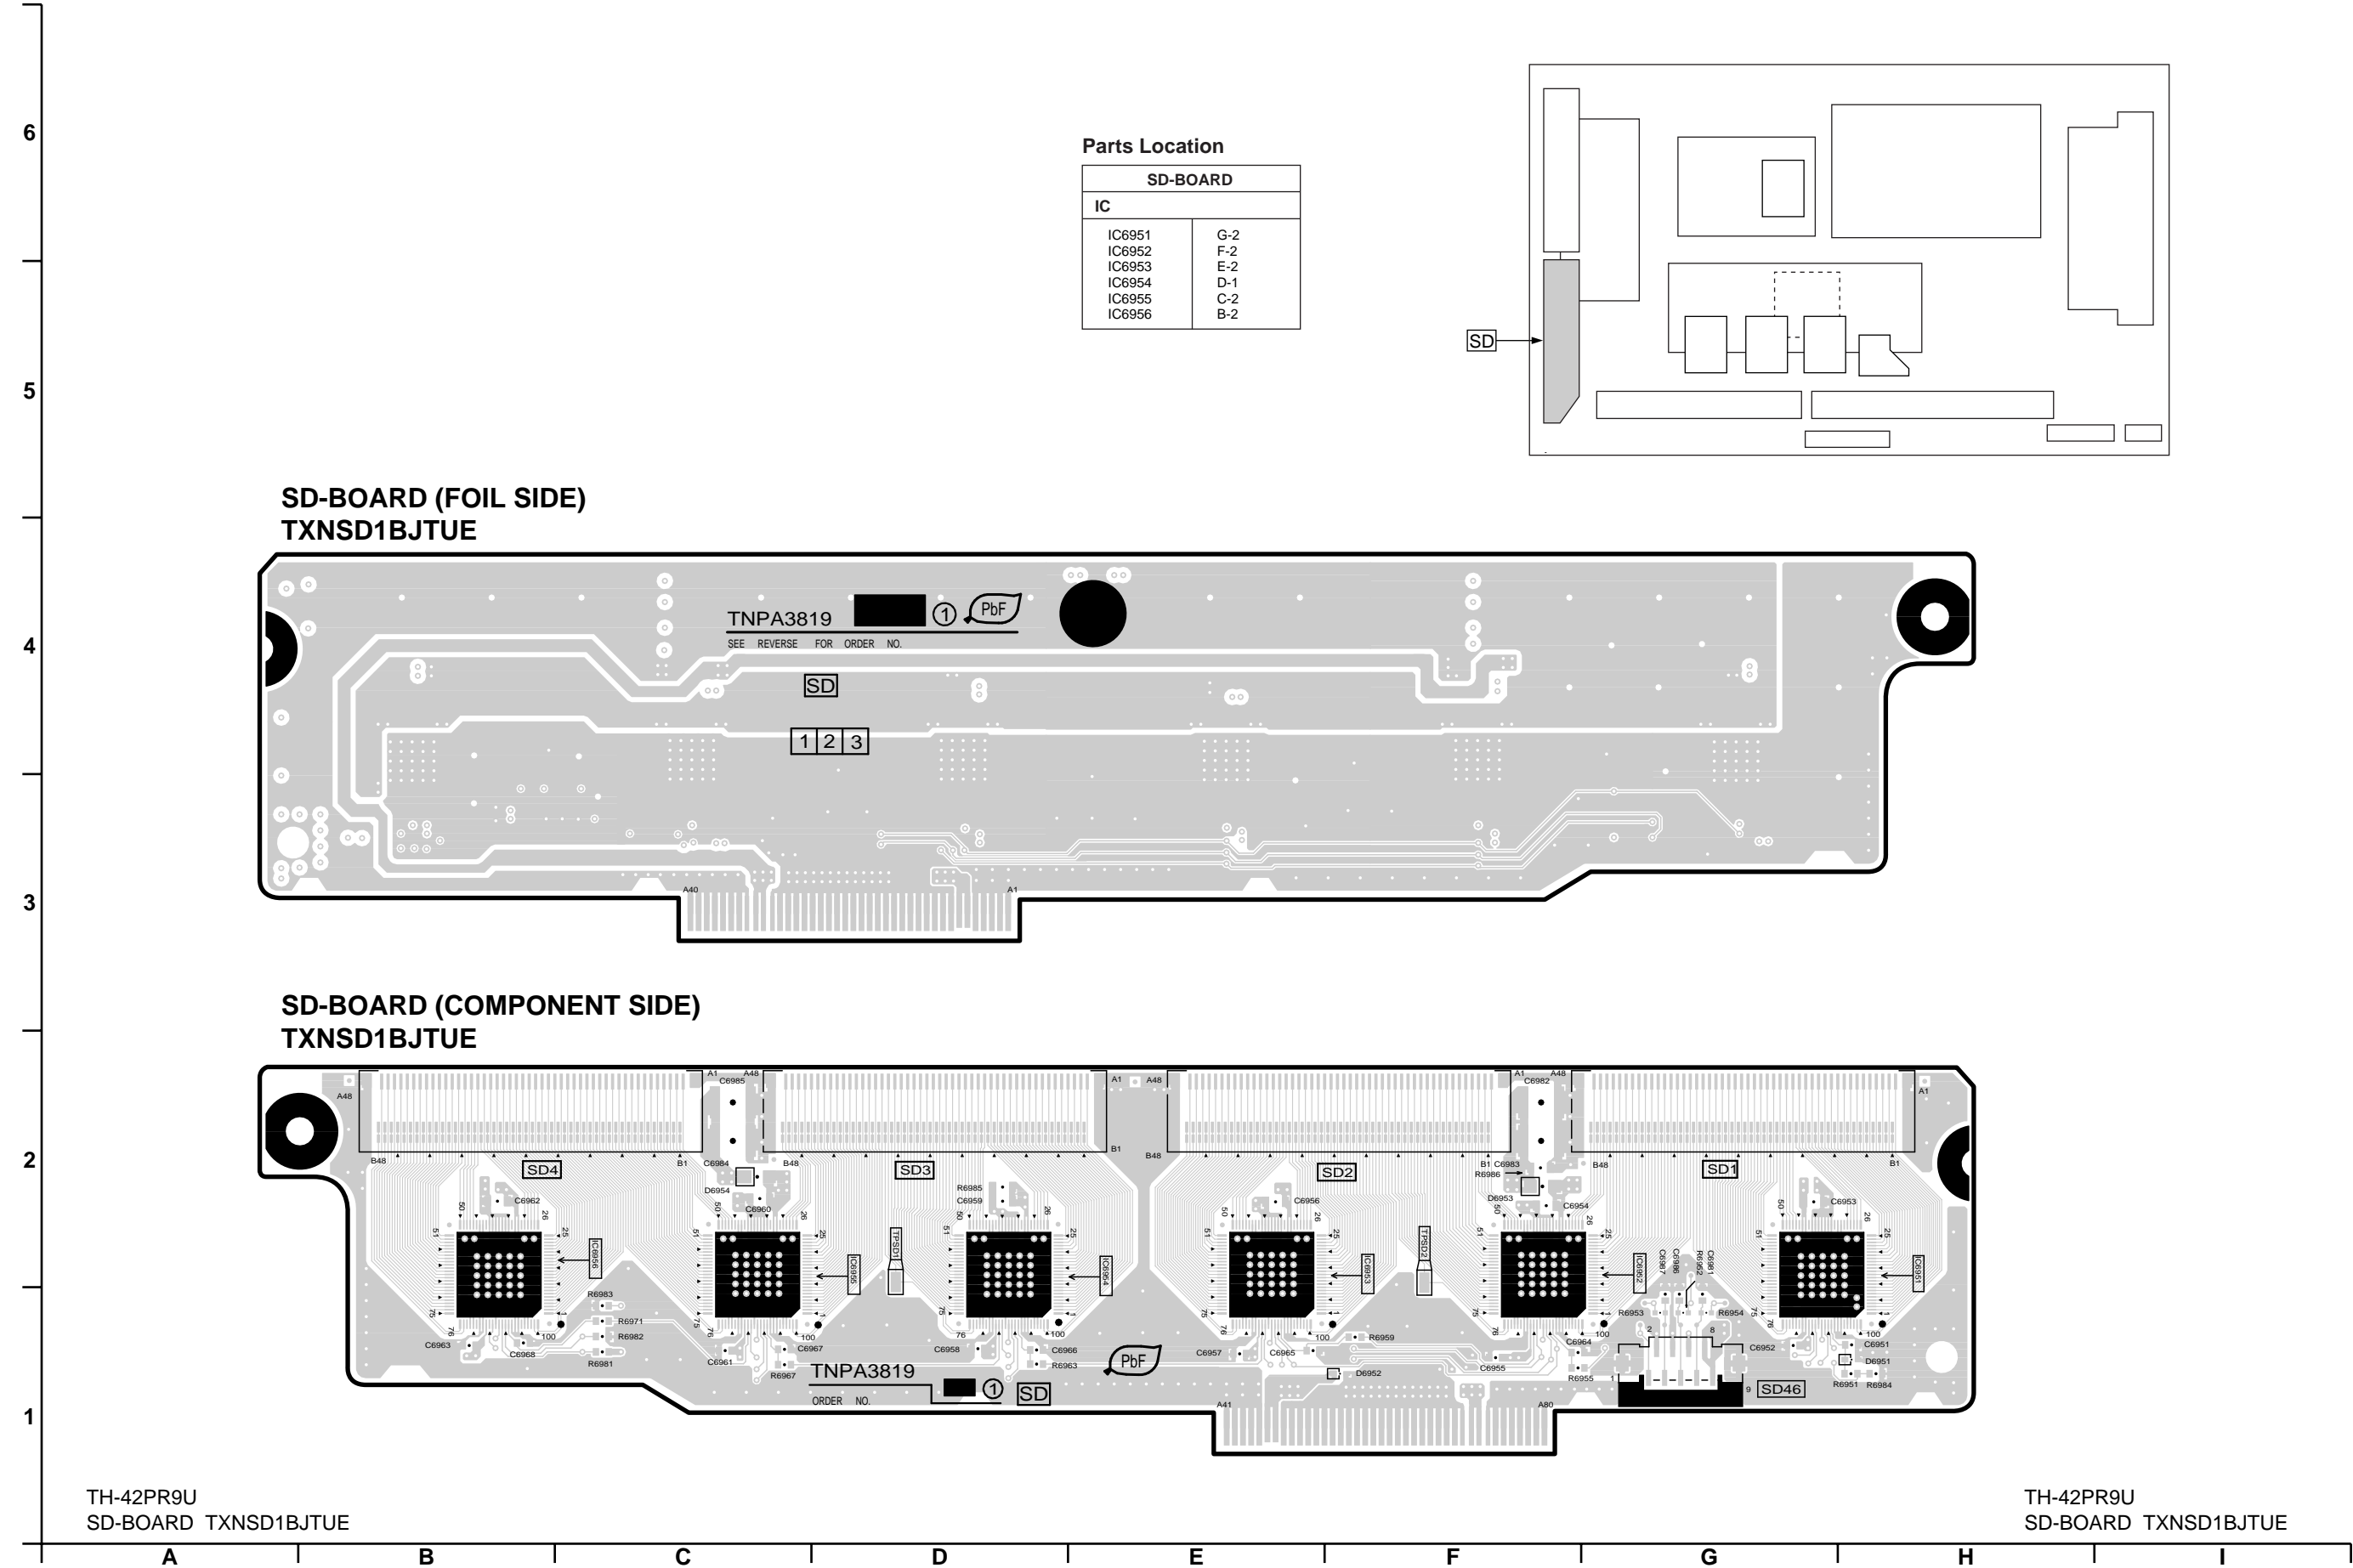

6

5

4


3

2


1

Parts Location

SS-BOARD (COMPONENT SIDE)							
IC		TRANSISTOR		Q6111 Q6112 Q6114 Q6141 Q6142 Q6146 Q6147 Q6171 Q6172 Q6181 Q6182 Q6221 Q6222 Q6251	G-2 G-2 G-2 C-3 C-3 C-2 C-3 F-3 F-3 E-3 F-3 F-2 F-1 H-3	TP	
IC6131	B-3	Q6001	A-3			TP15V	B-2
IC6151	E-2	Q6002	B-3			TPSS1	H-4
IC6191	H-3	Q6003	B-3			TPVDA	A-2
IC6211	F-2	Q6021	C-3			TPVe	F-2
IC6221	F-2	Q6022	C-3			TPVSUS	A-2
IC6241	H-2	Q6023	D-3			VOLUME	
IC6251	I-3	Q6041	F-3				
		Q6042	F-3			VR6000	F-2
		Q6051	E-3				
		Q6052	E-3				
		Q6101	H-3				
		Q6102	H-3				
		Q6103	H-2				
		Q6104	G-3				
		Q6105	G-3				
		Q6106	G-2				

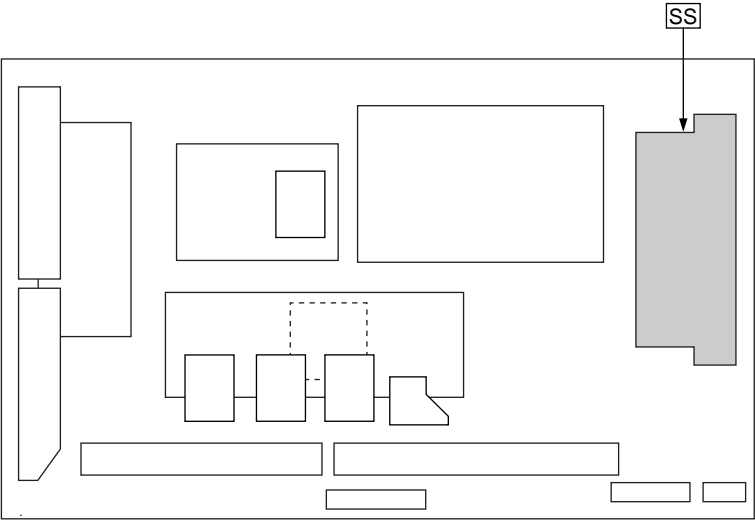

SS-BOARD (COMPONENT SIDE)
TXNSS1BKTUE (37inch)
TXNSS1BJTUE (42inch)

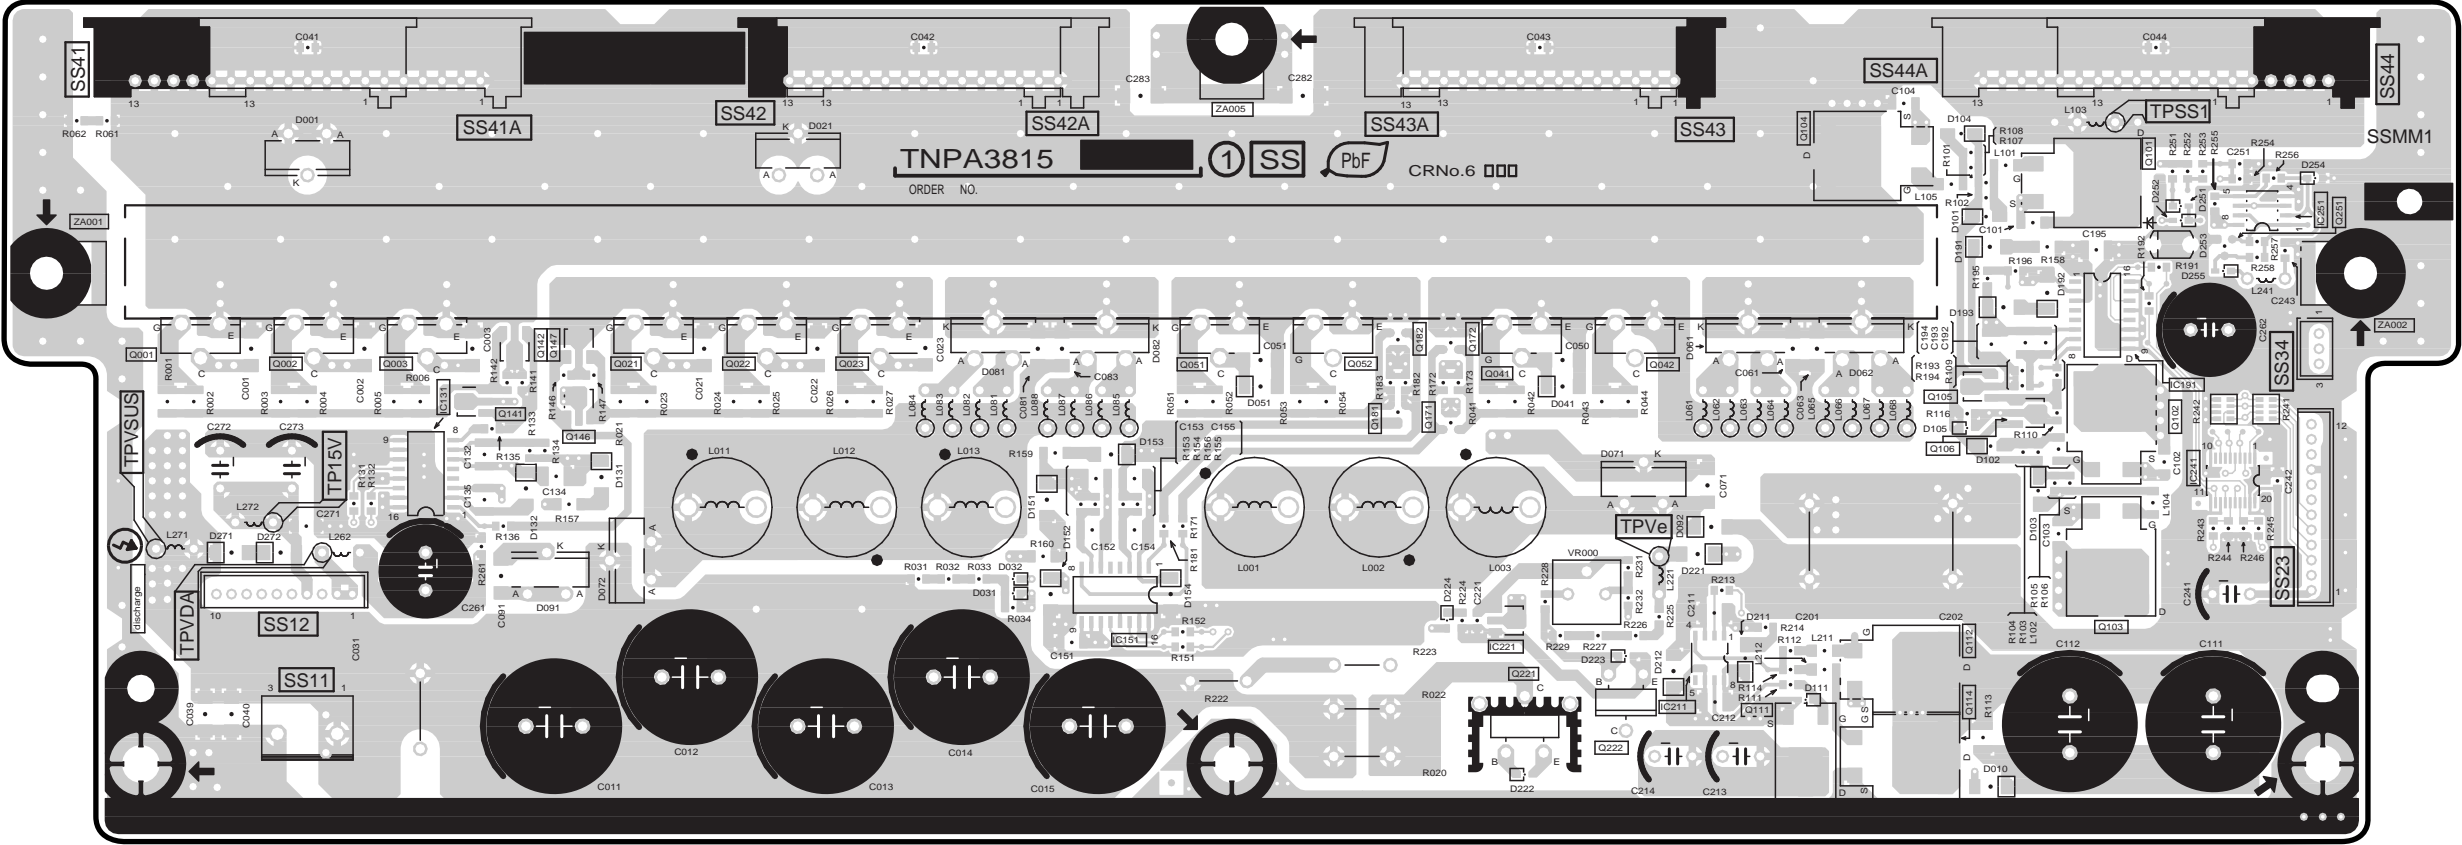

TH-37PR9U
SS-BOARD TXNSS1BKTUE

TH-42PR9U
SS-BOARD TXNSS1BJTUE

TH-37PR9U
SS-BOARD TXNSS1BKTUE

TH-42PR9U
SS-BOARD TXNSS1BJTUE







15 Block and Schematic Diagram

15.1. Schematic Diagram Notes

Important Safety Notice


Components identified by \triangle mark have special characteristics important for safety.
When replacing any of these components, use only manufacture's specified parts.

Notes:


- 1. **Resistor**
Unit of resistance is OHM [Ω] (K=1,000, M=1,000,000).
- 2. **Capacitor**
Unit of capacitance is μ F, unless otherwise noted.
- 3. Coil
Unit of inductance is H, unless otherwise noted.
- 4. Test Point
 : Test Point position
- 5. Earth Symbol
 : Chassis Earth (Cold)  : Line Earth (Hot)
- 6. Voltage Measurement
Voltage is measured by a DC voltmeter.
Conditions of the measurement are the following:
Power Source AC120V, 50/60Hz
Receiving Signal Colour Bar signal (RF)
All customer's controls Maximum positions
- 7. When arrow mark () is found, connection is easily found from the direction of arrow.
- 8. Indicates the major signal flow. : Video  Audio 
- 9. This schematic diagram is the latest at the time of printing and subject to change without notice.

Remarks:

- 1. The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection.
The circuit is defined by HOT and COLD indications in the schematic diagram. Take the following precautions.
All circuits, except the Power Circuit, are cold.
Precautions
 - a. Do not touch the hot part or the hot and cold parts at the same time or you may be shocked.
 - b. Do not short- circuit the hot and cold circuits or a fuse may blow and parts may break.
 - c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously or a fuse may blow.
Connect the earth of instruments to the earth connection of the circuit being measured.
 - d. Make sure to disconnect the power plug before removing the chassis.



15.3. Main Block Diagram (42 inch)

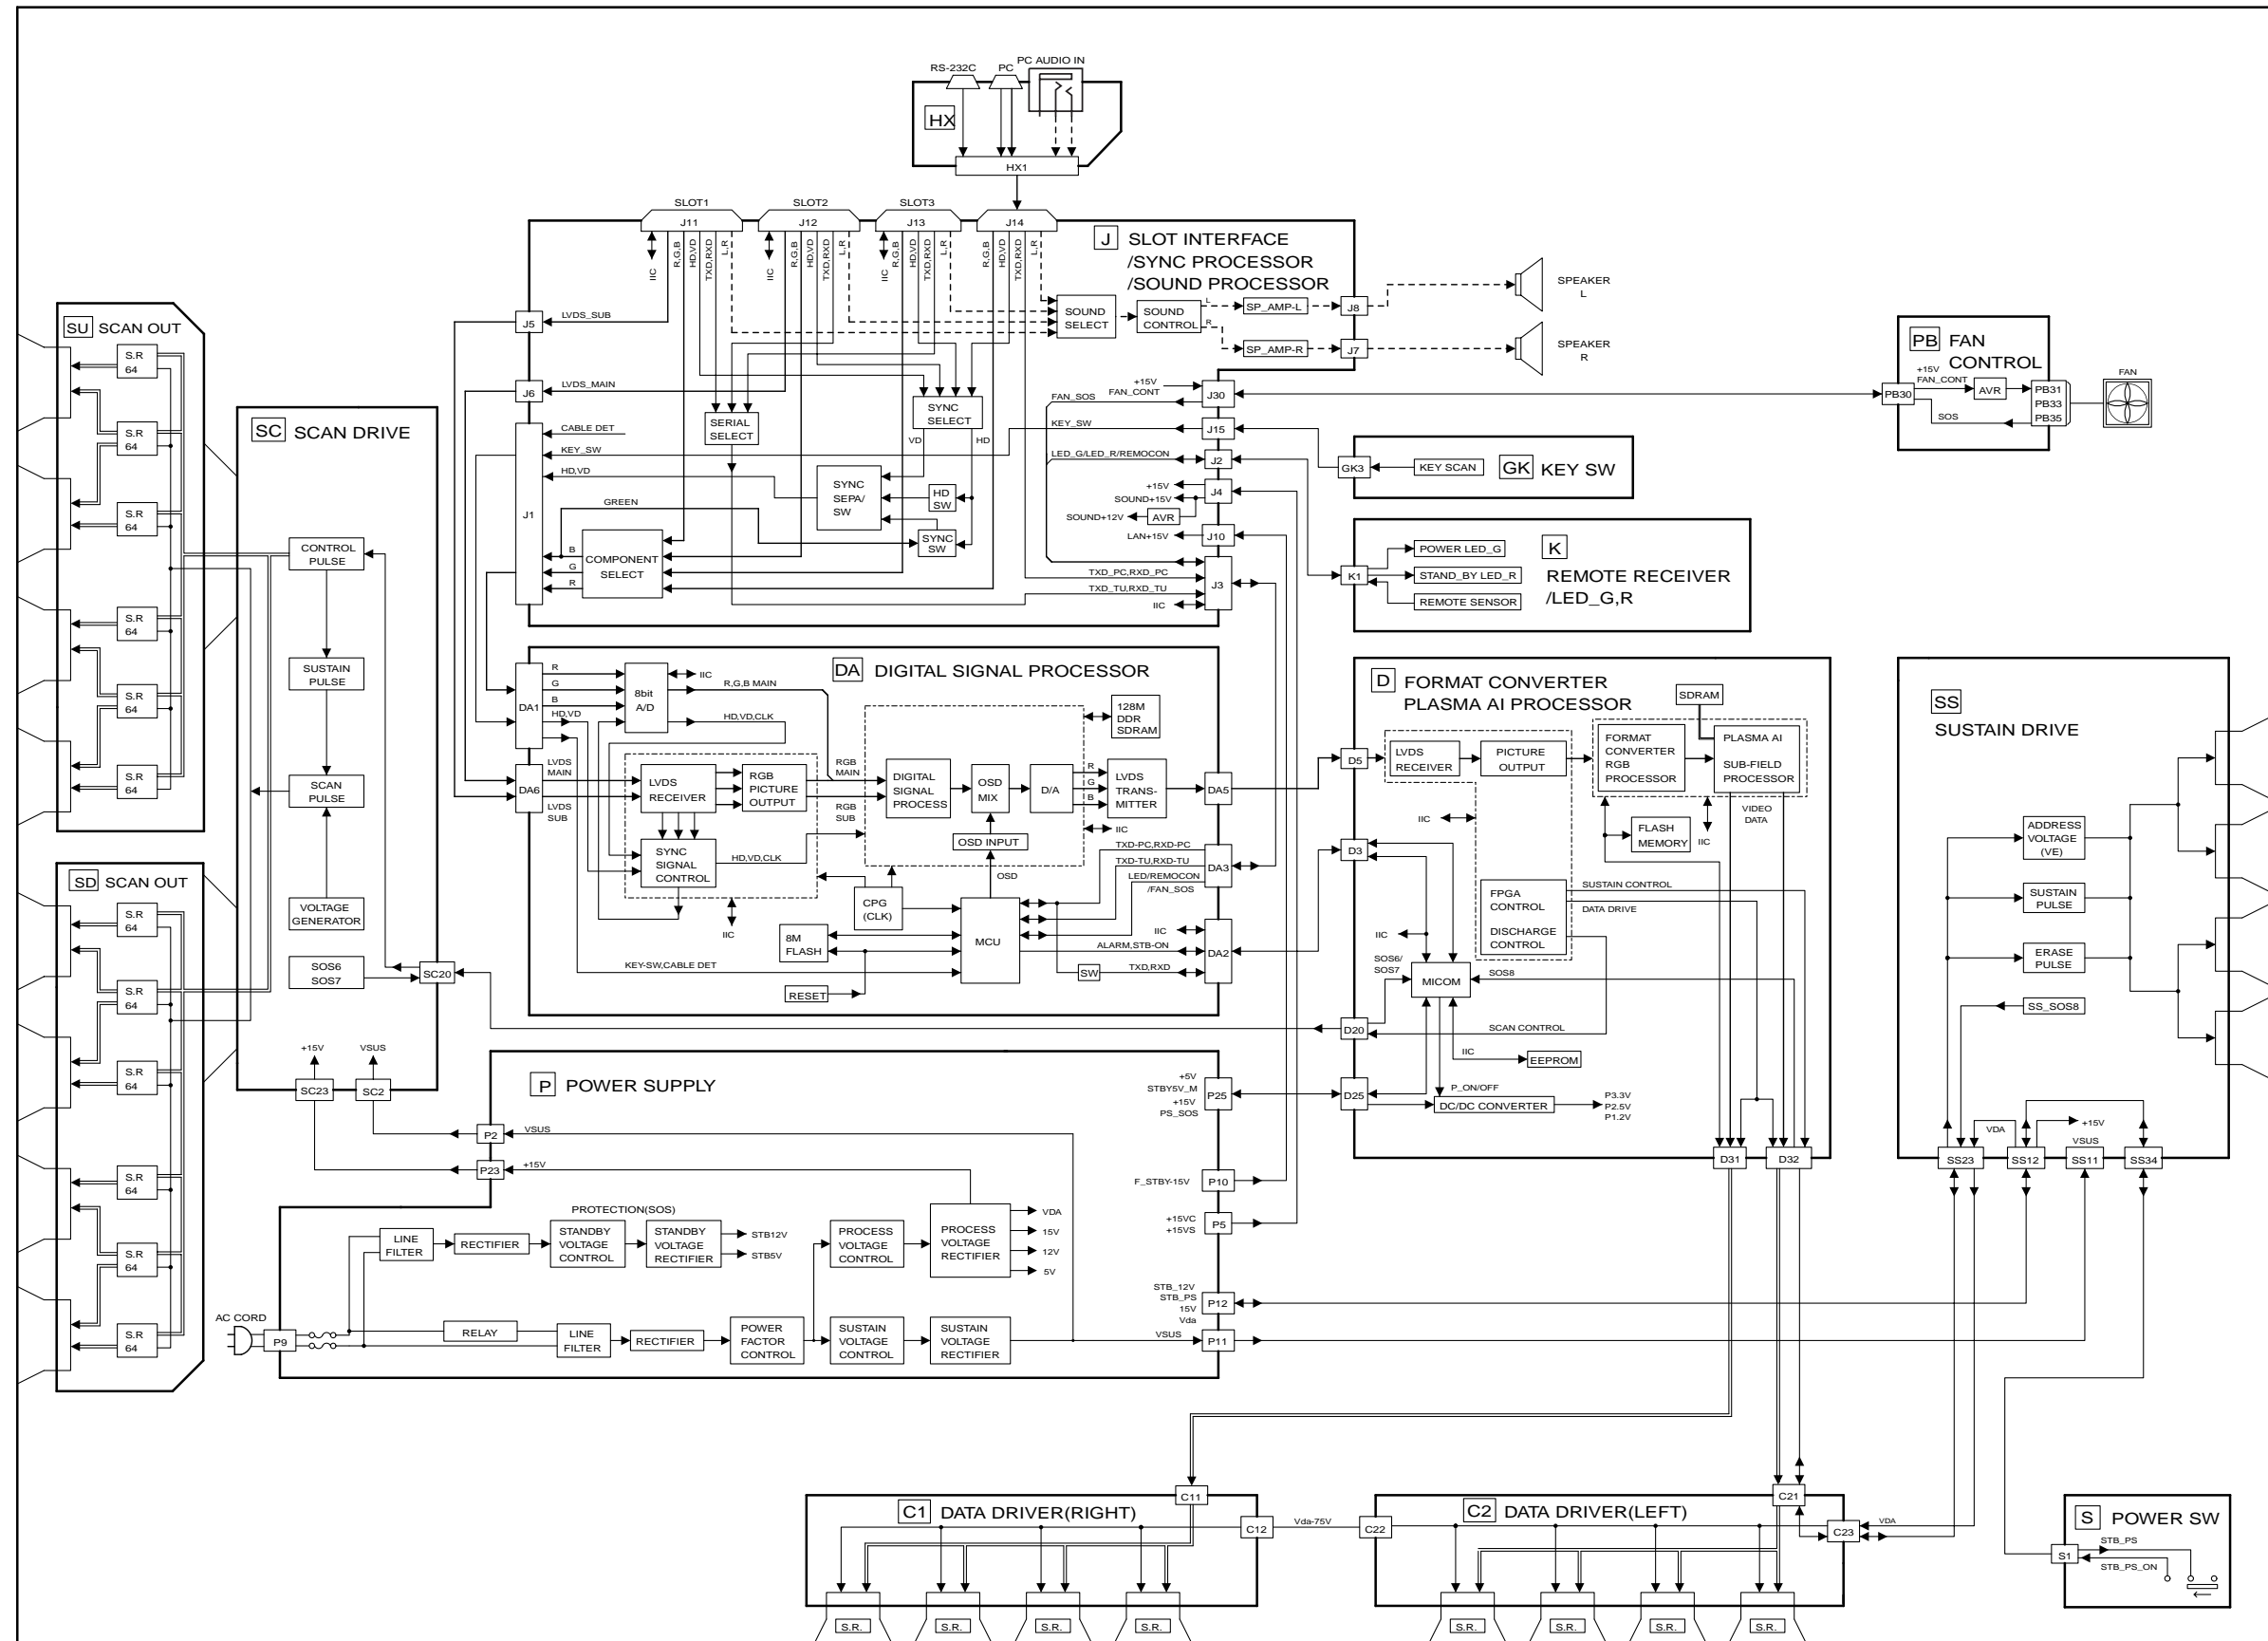


TH-42PR9U Main Block Diagram


TH-42PR9U

Main Block Diagram




15.5. P-Board (1 of 6) Schematic Diagram (37inch)

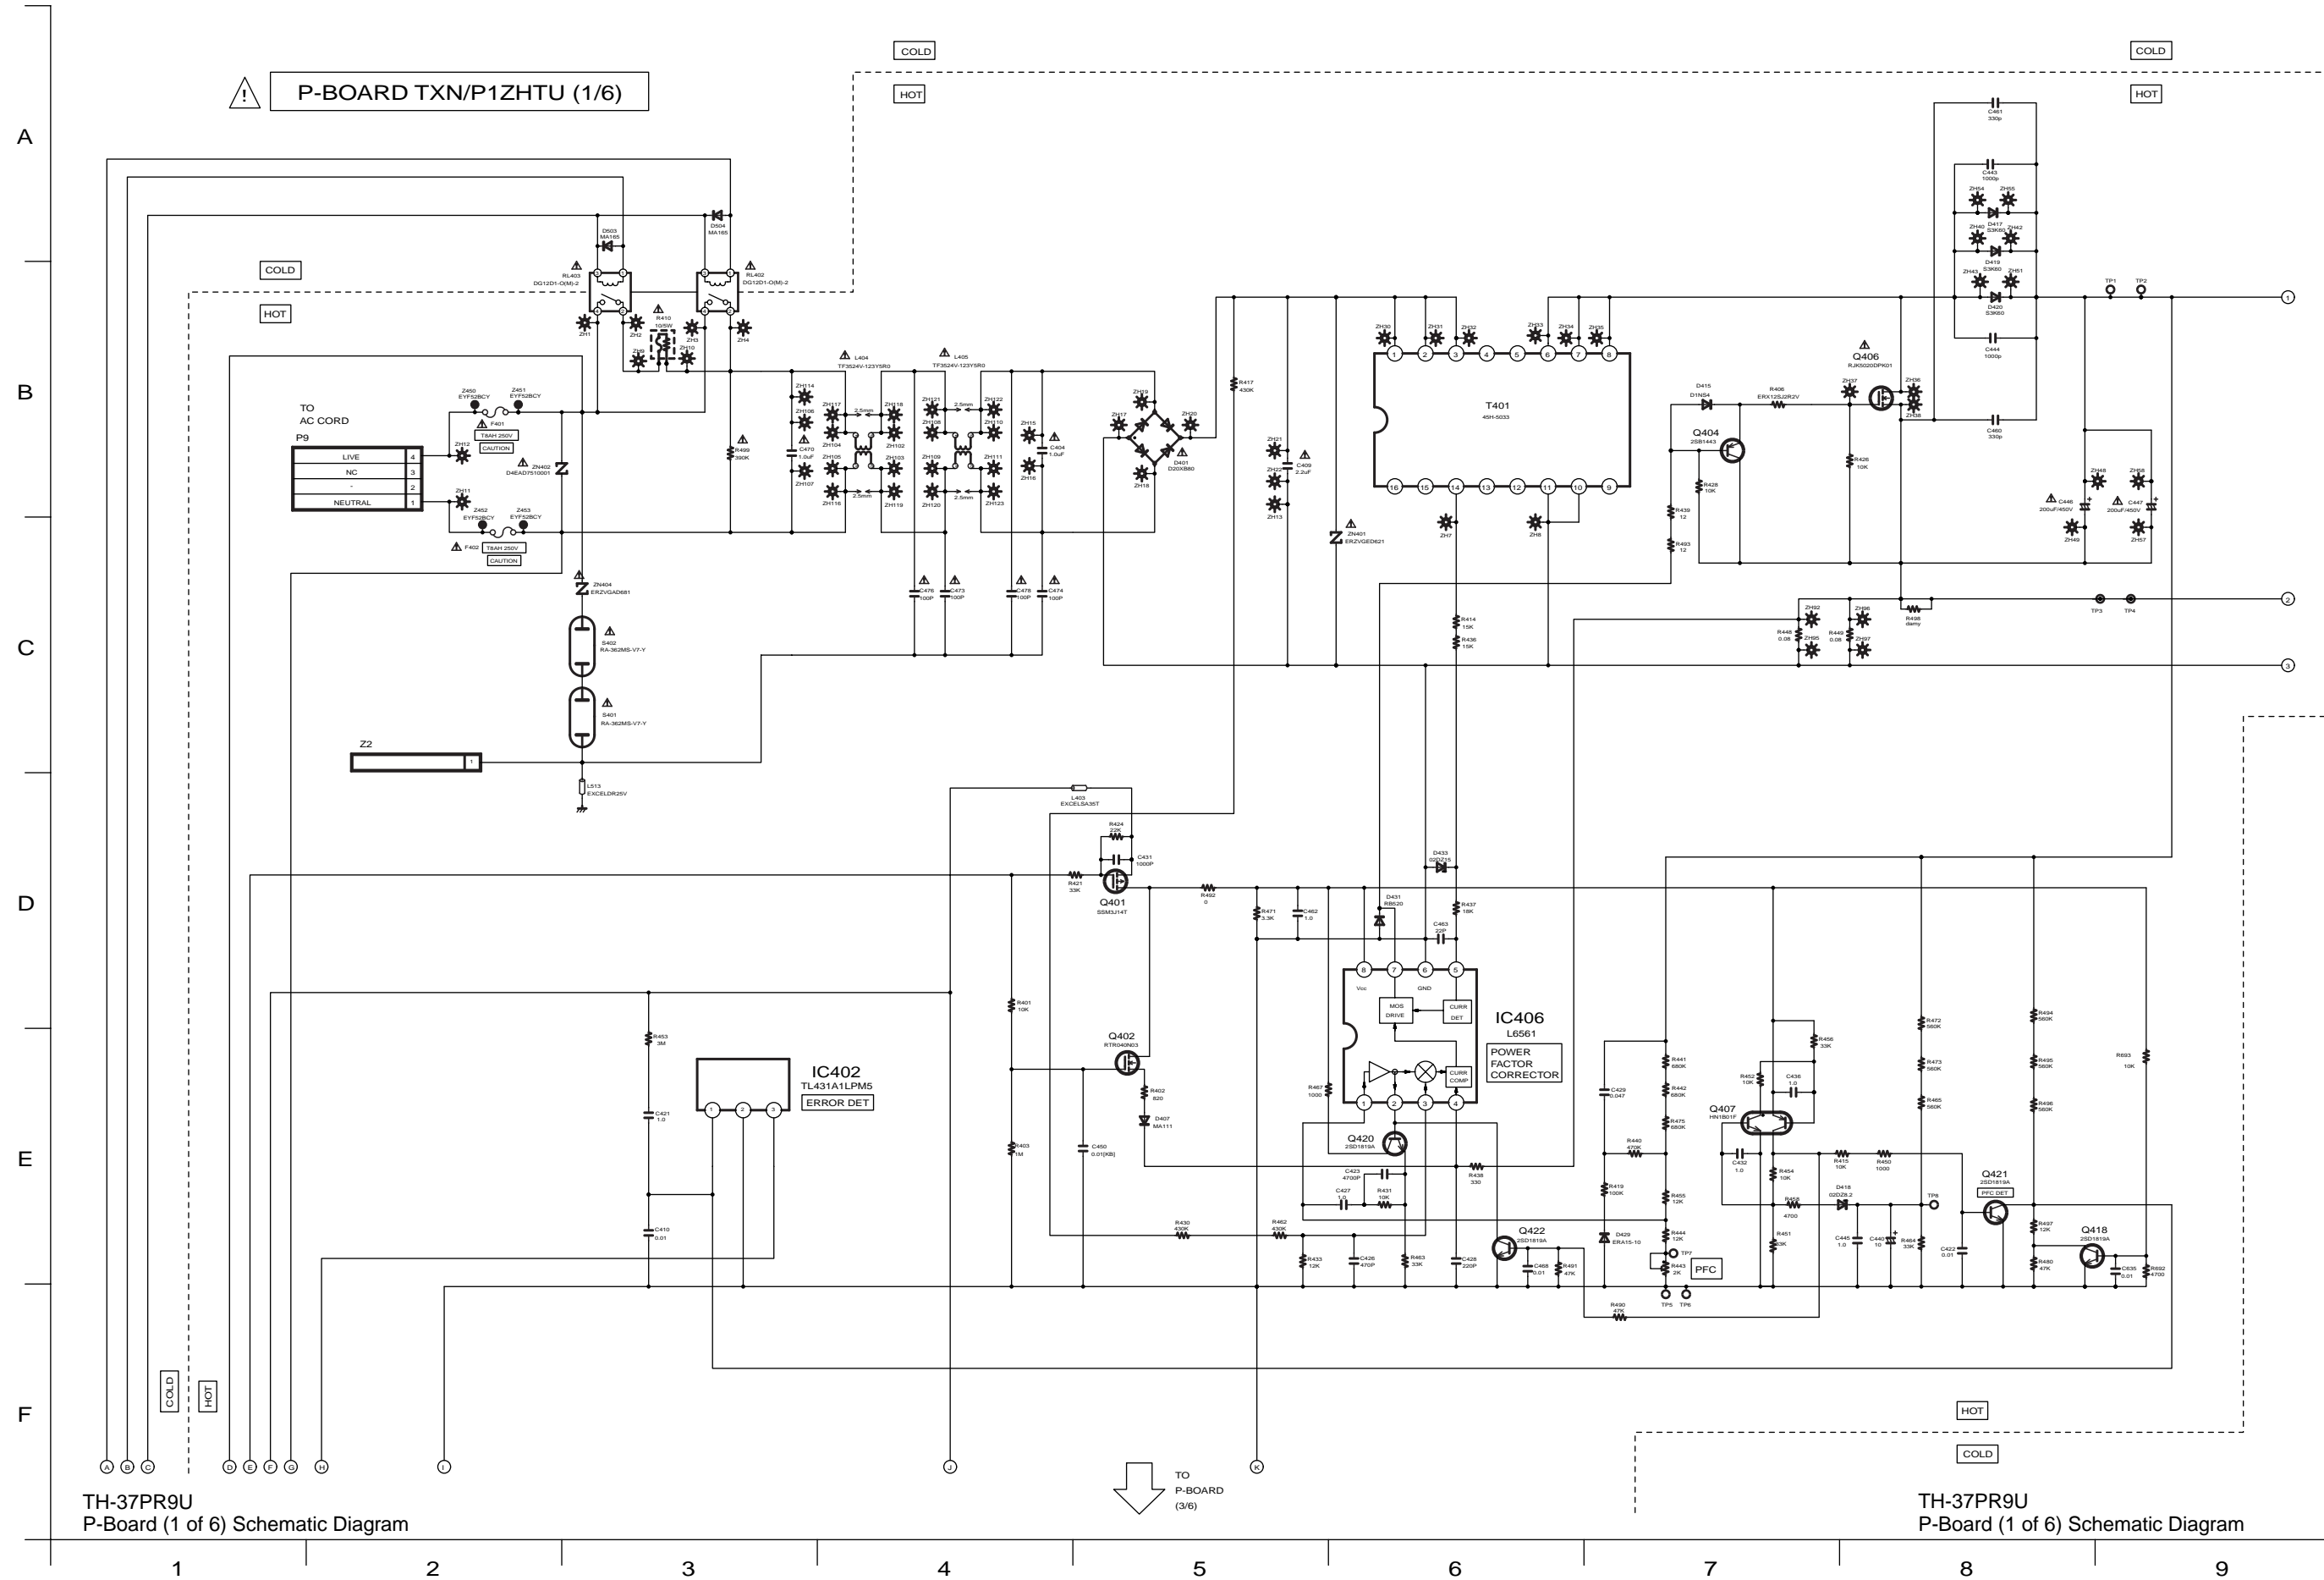






15.8. P-Board (4 of 6) Schematic Diagram (37inch)

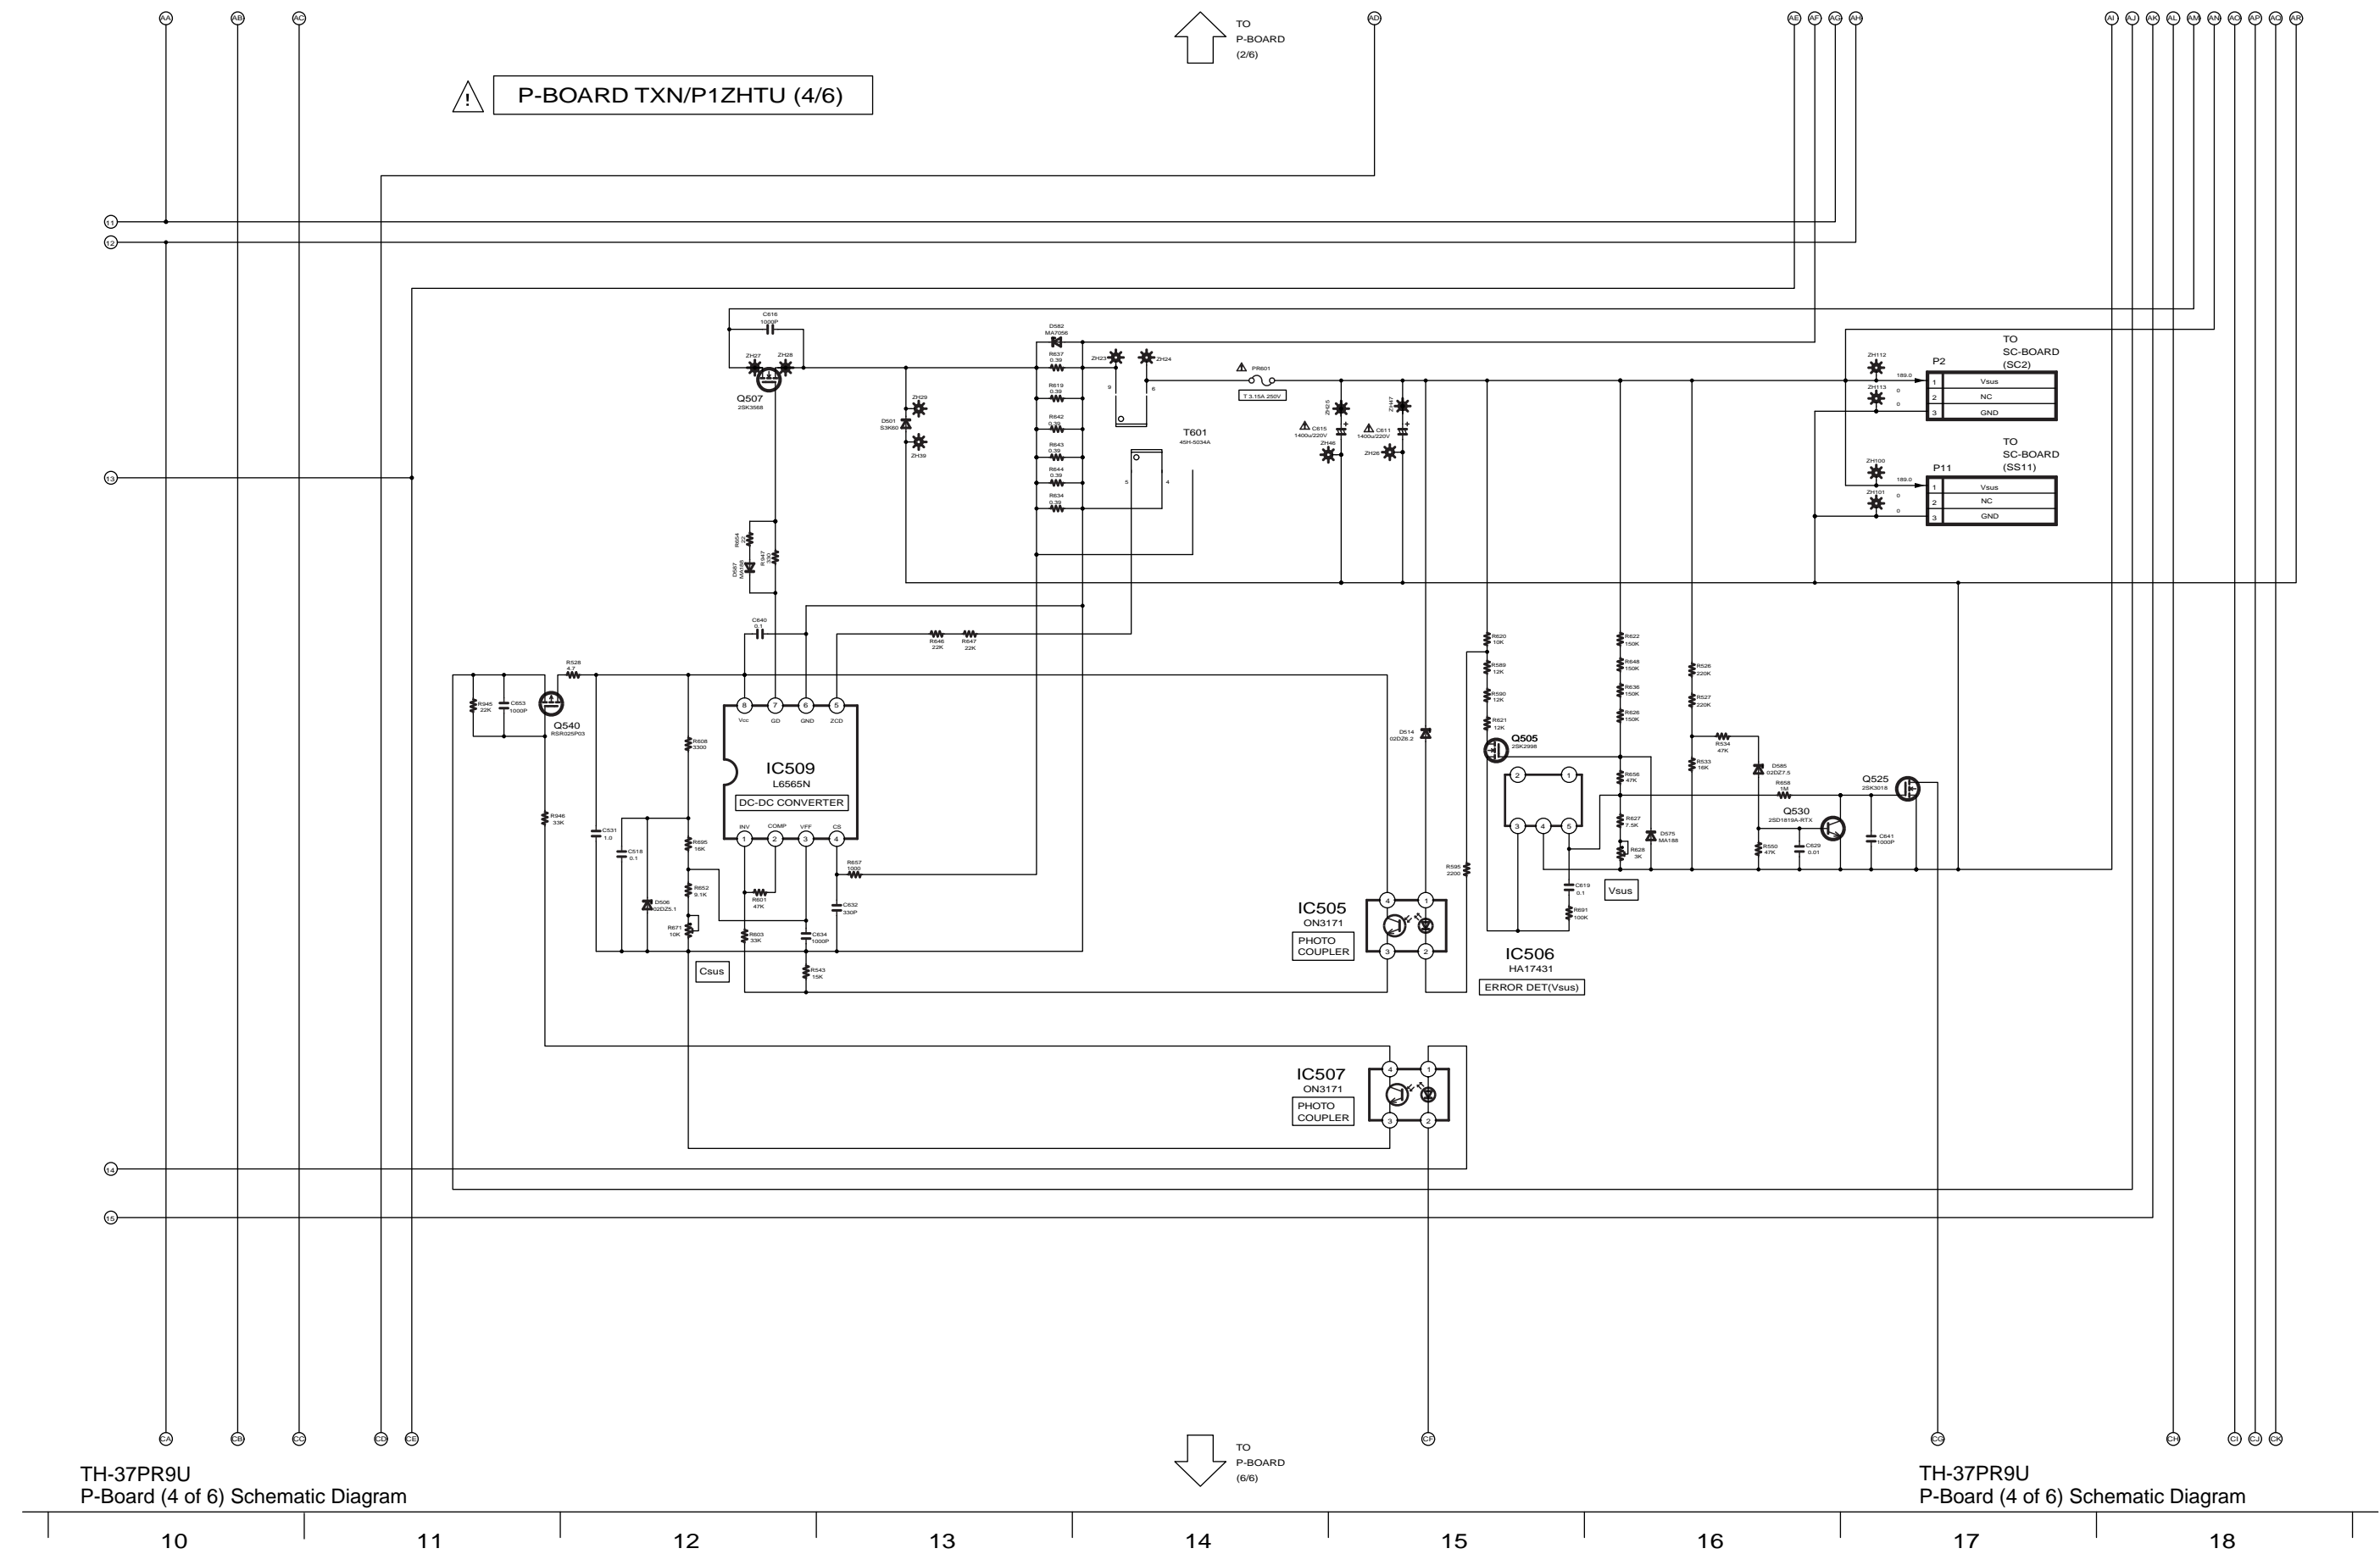


15.9. P-Board (5 of 6) Schematic Diagram (37inch)

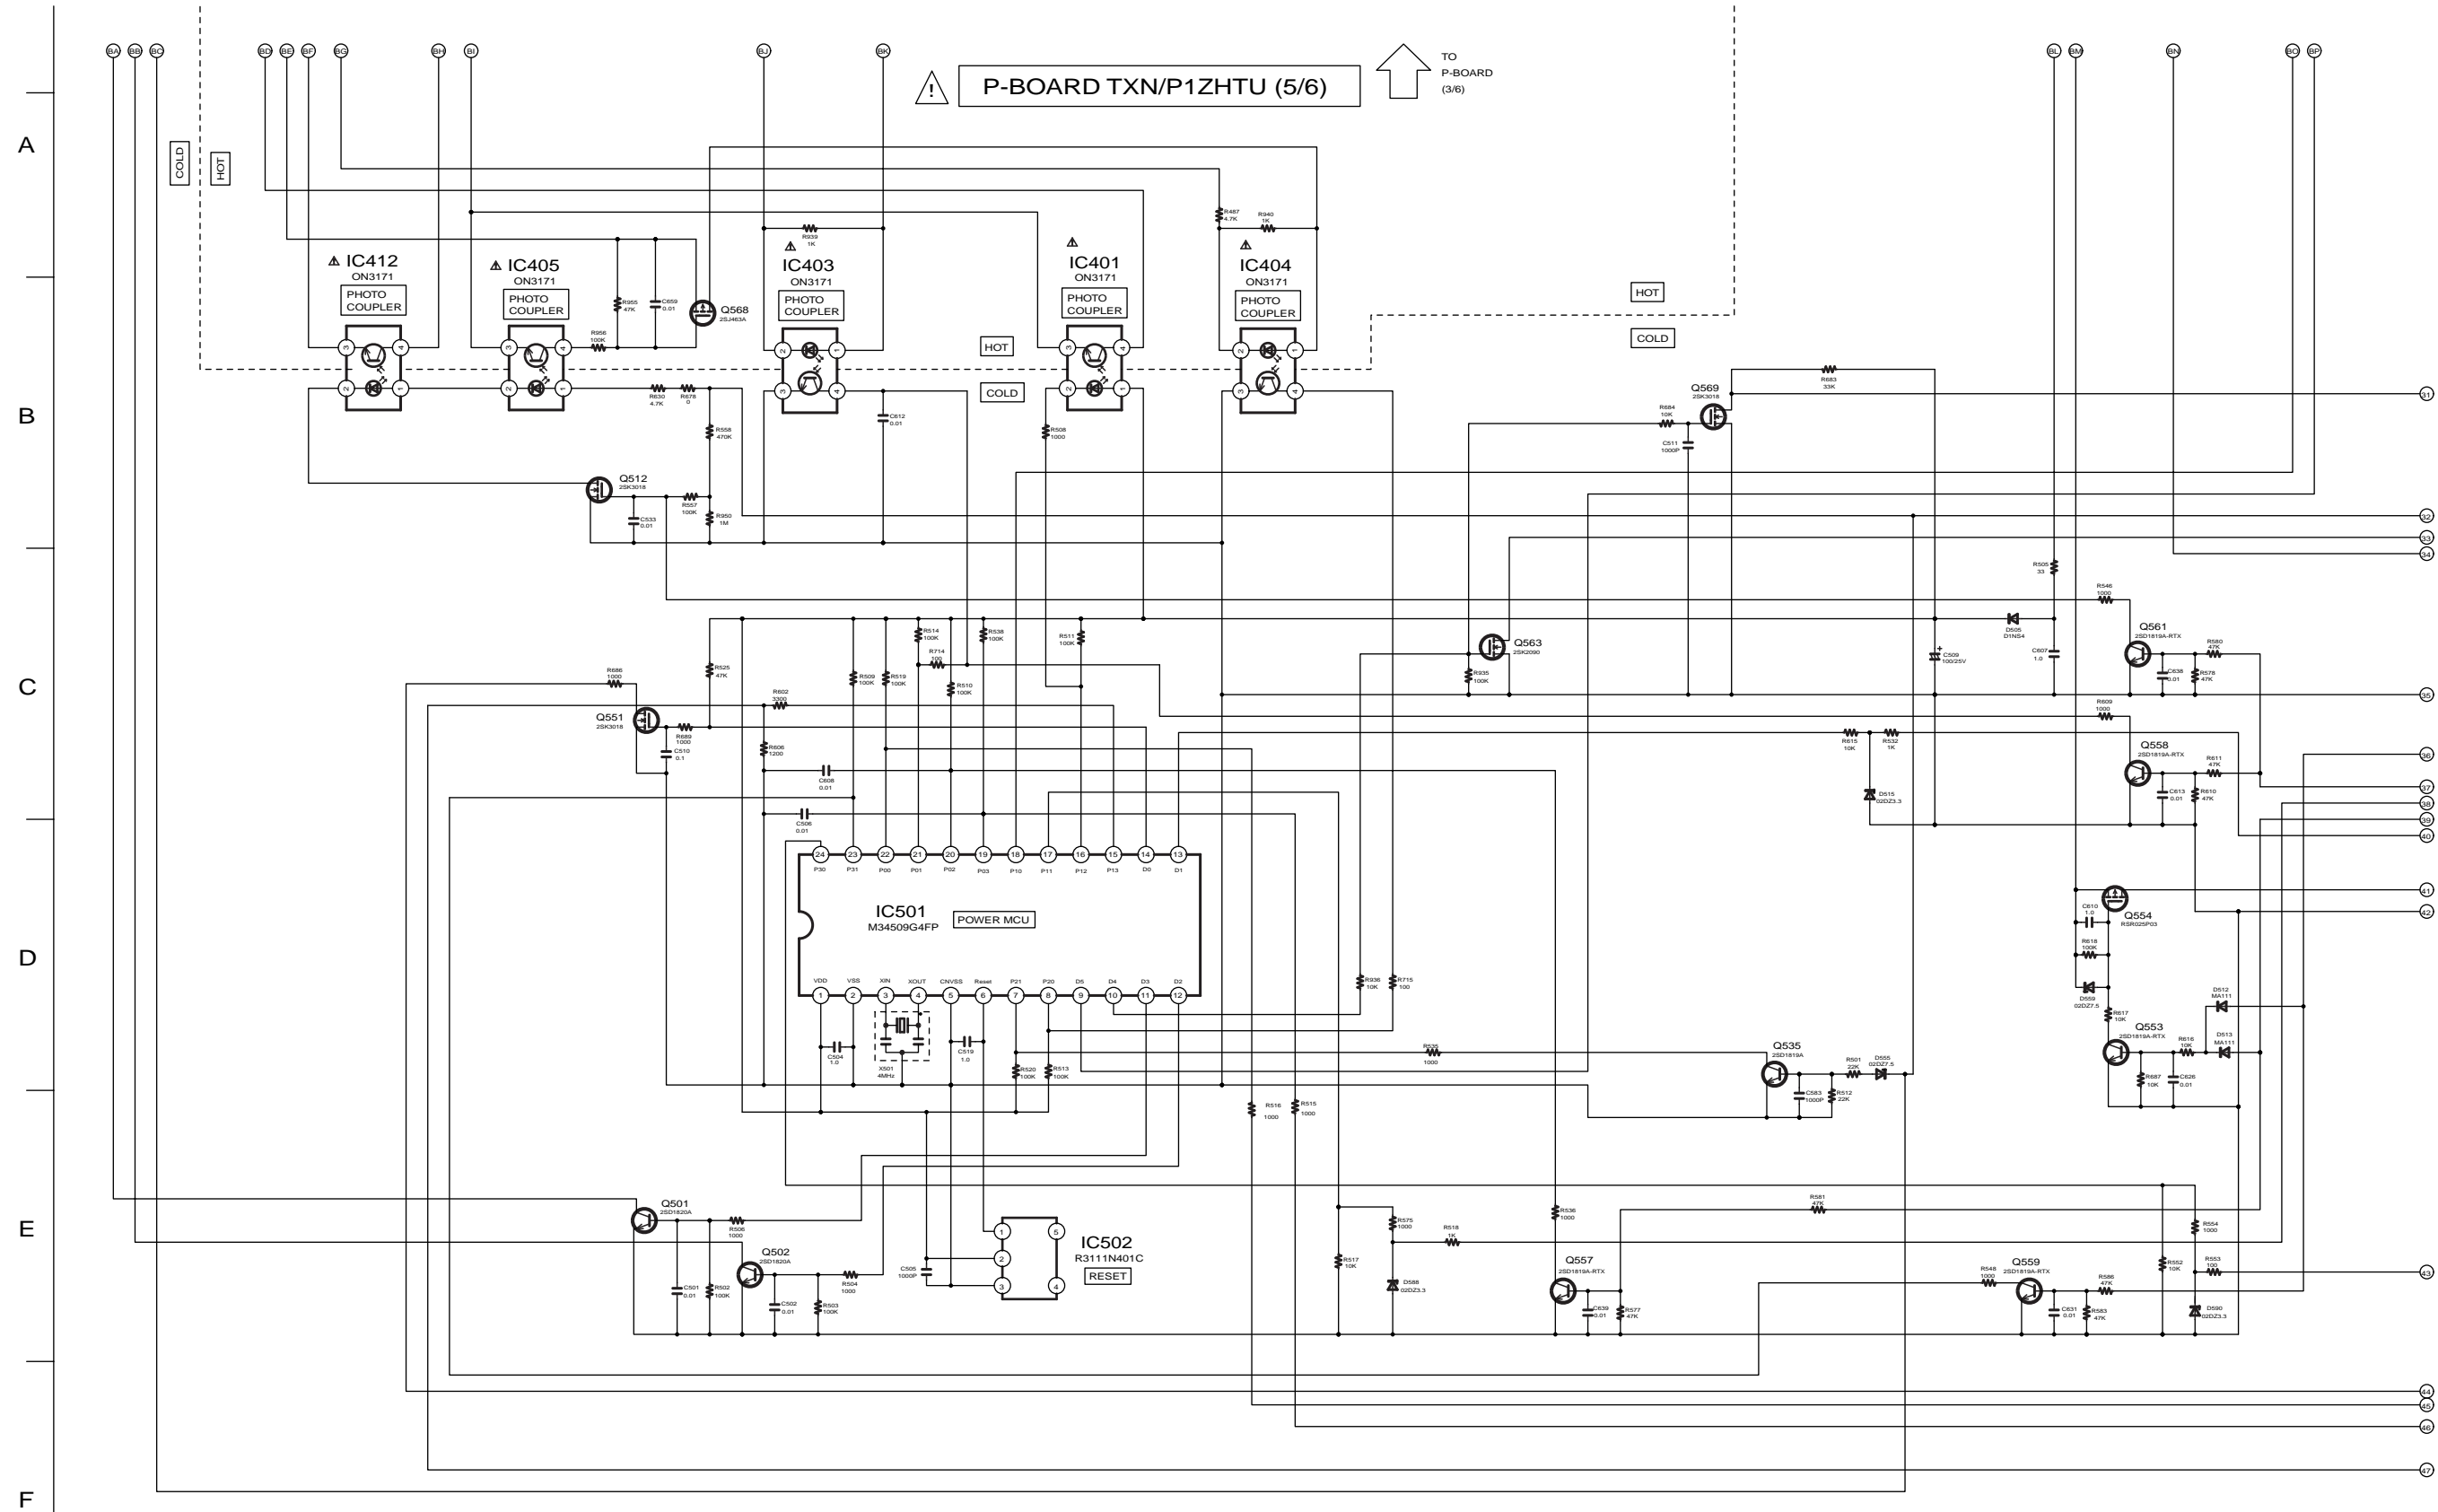

TH-37PR9U
P-Board (5 of 6) Schematic Diagram

TH-37PR9U
P-Board (5 of 6) Schematic Diagram


15.10. P-Board (6 of 6) Schematic Diagram (37inch)

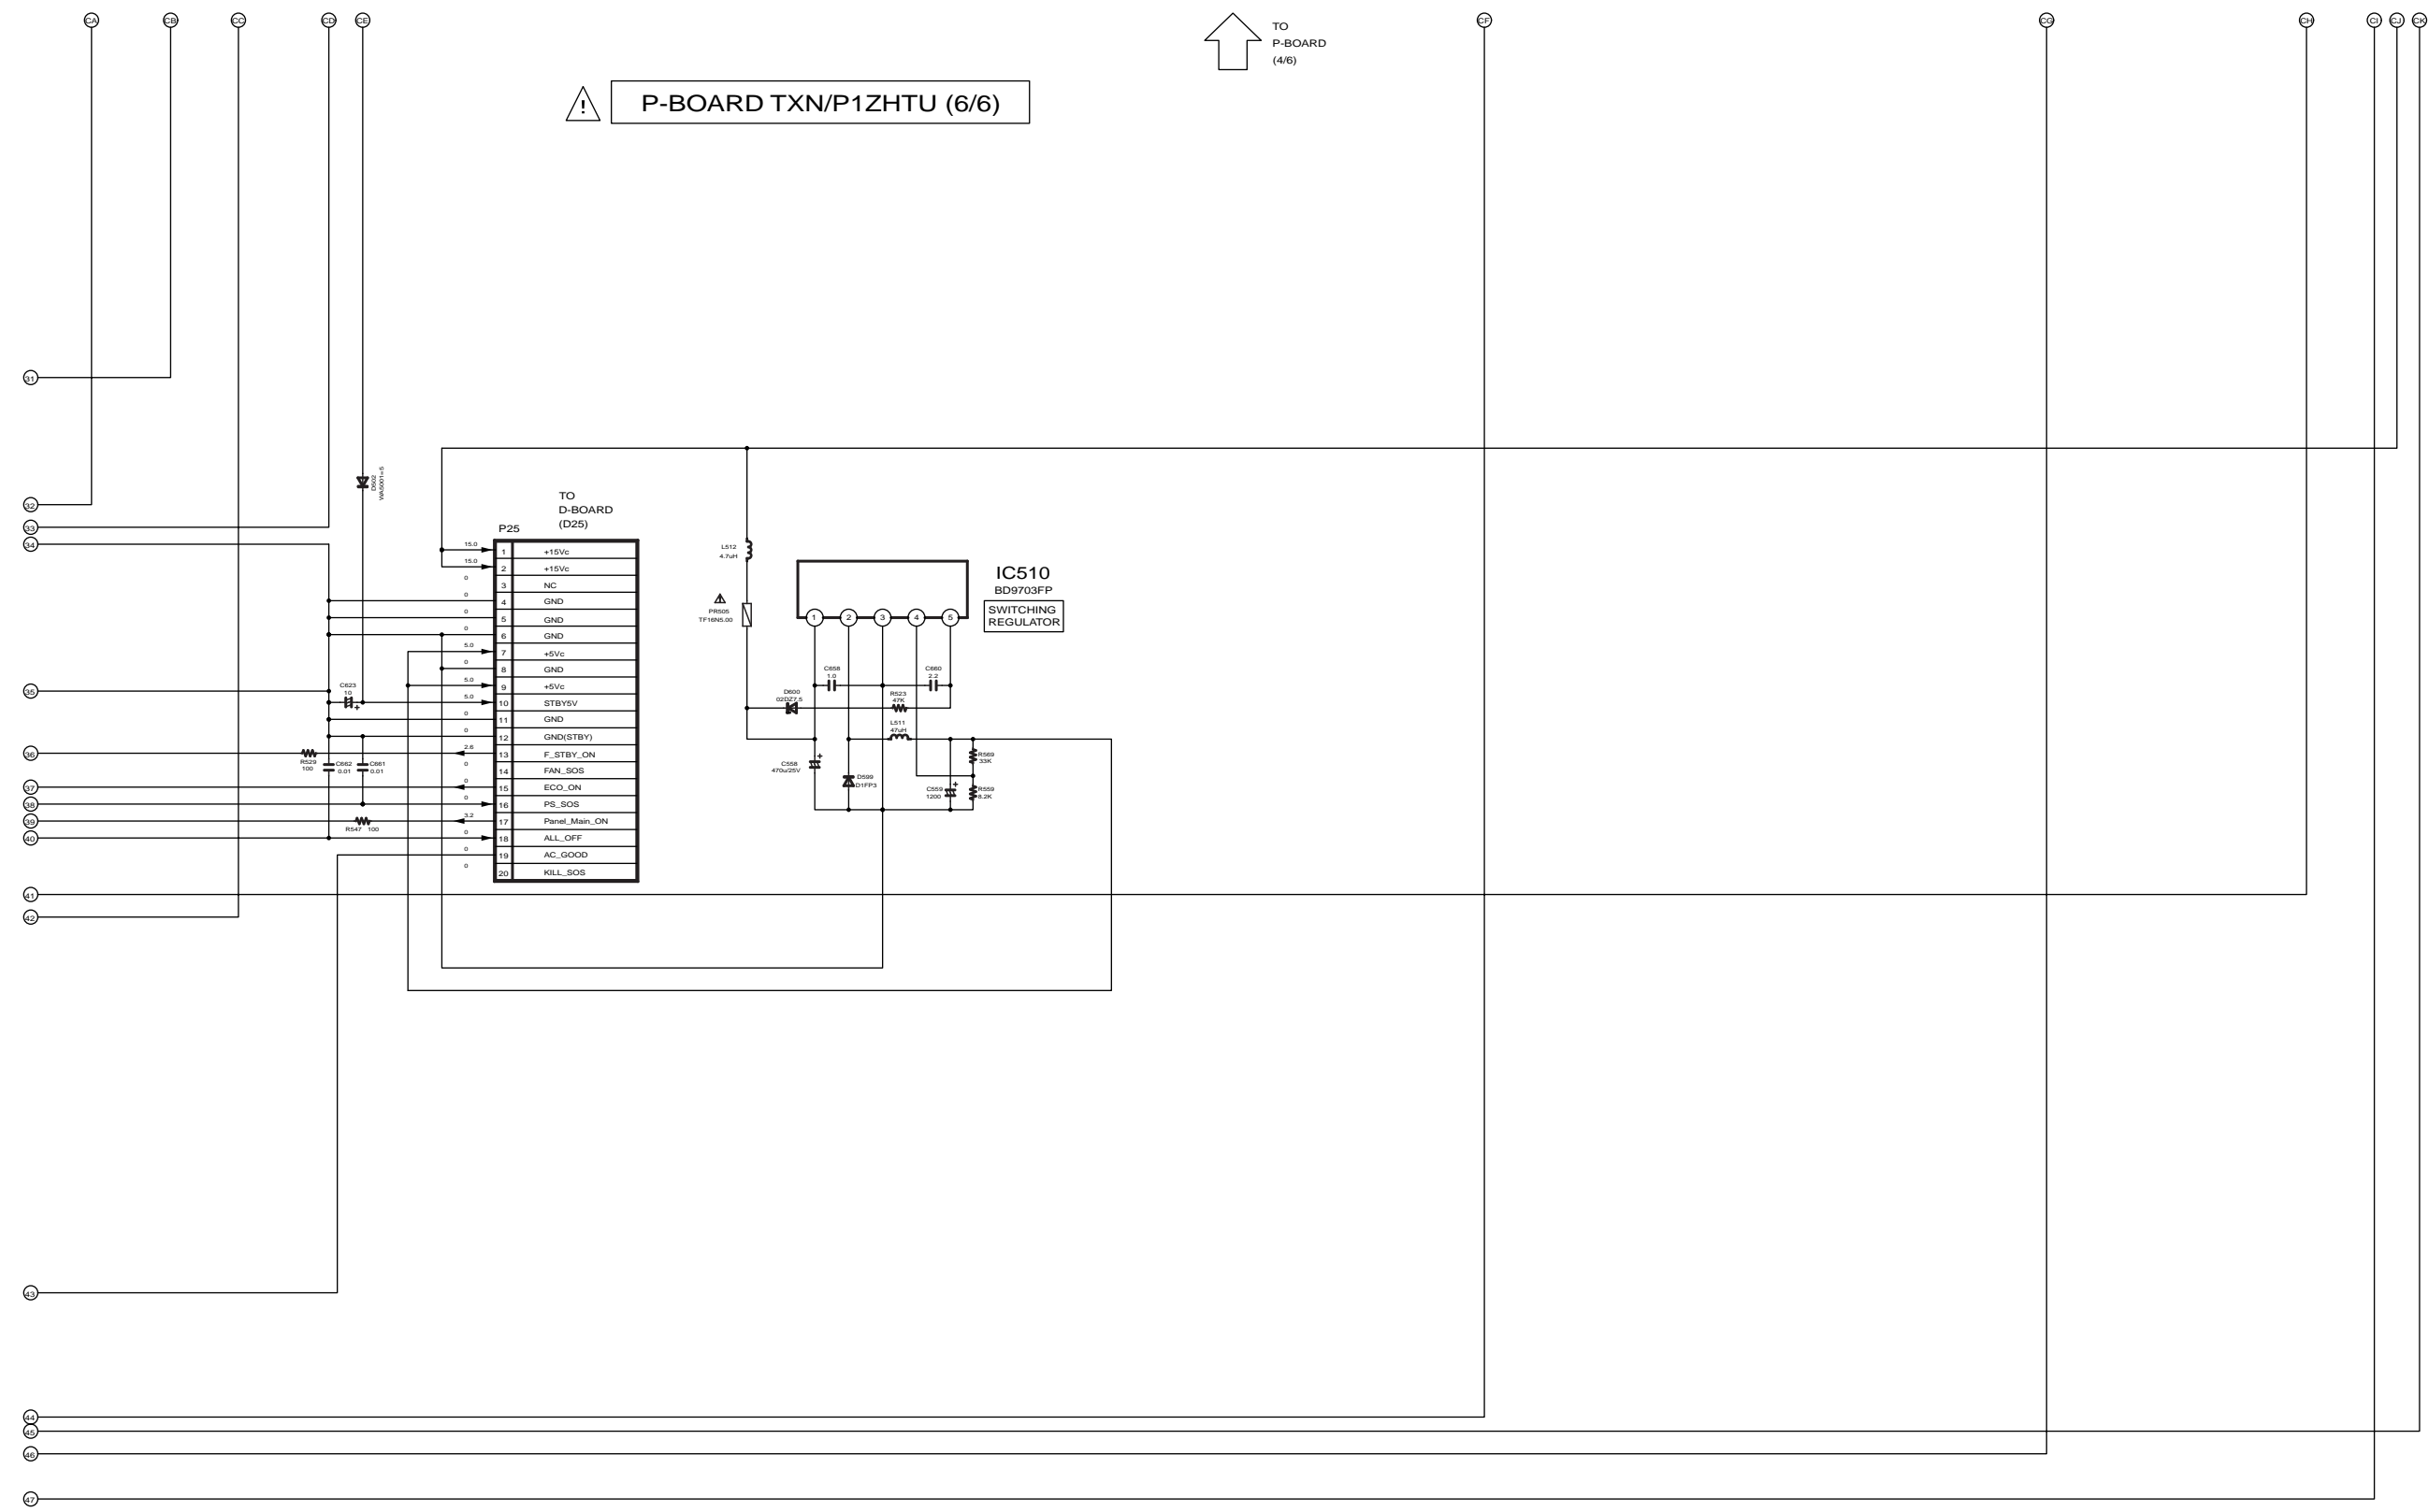

TH-37PR9U
P-Board (6 of 6) Schematic Diagram

TH-37PR9U
P-Board (6 of 6) Schematic Diagram


15.11. P-Board Block Diagram (42inch)

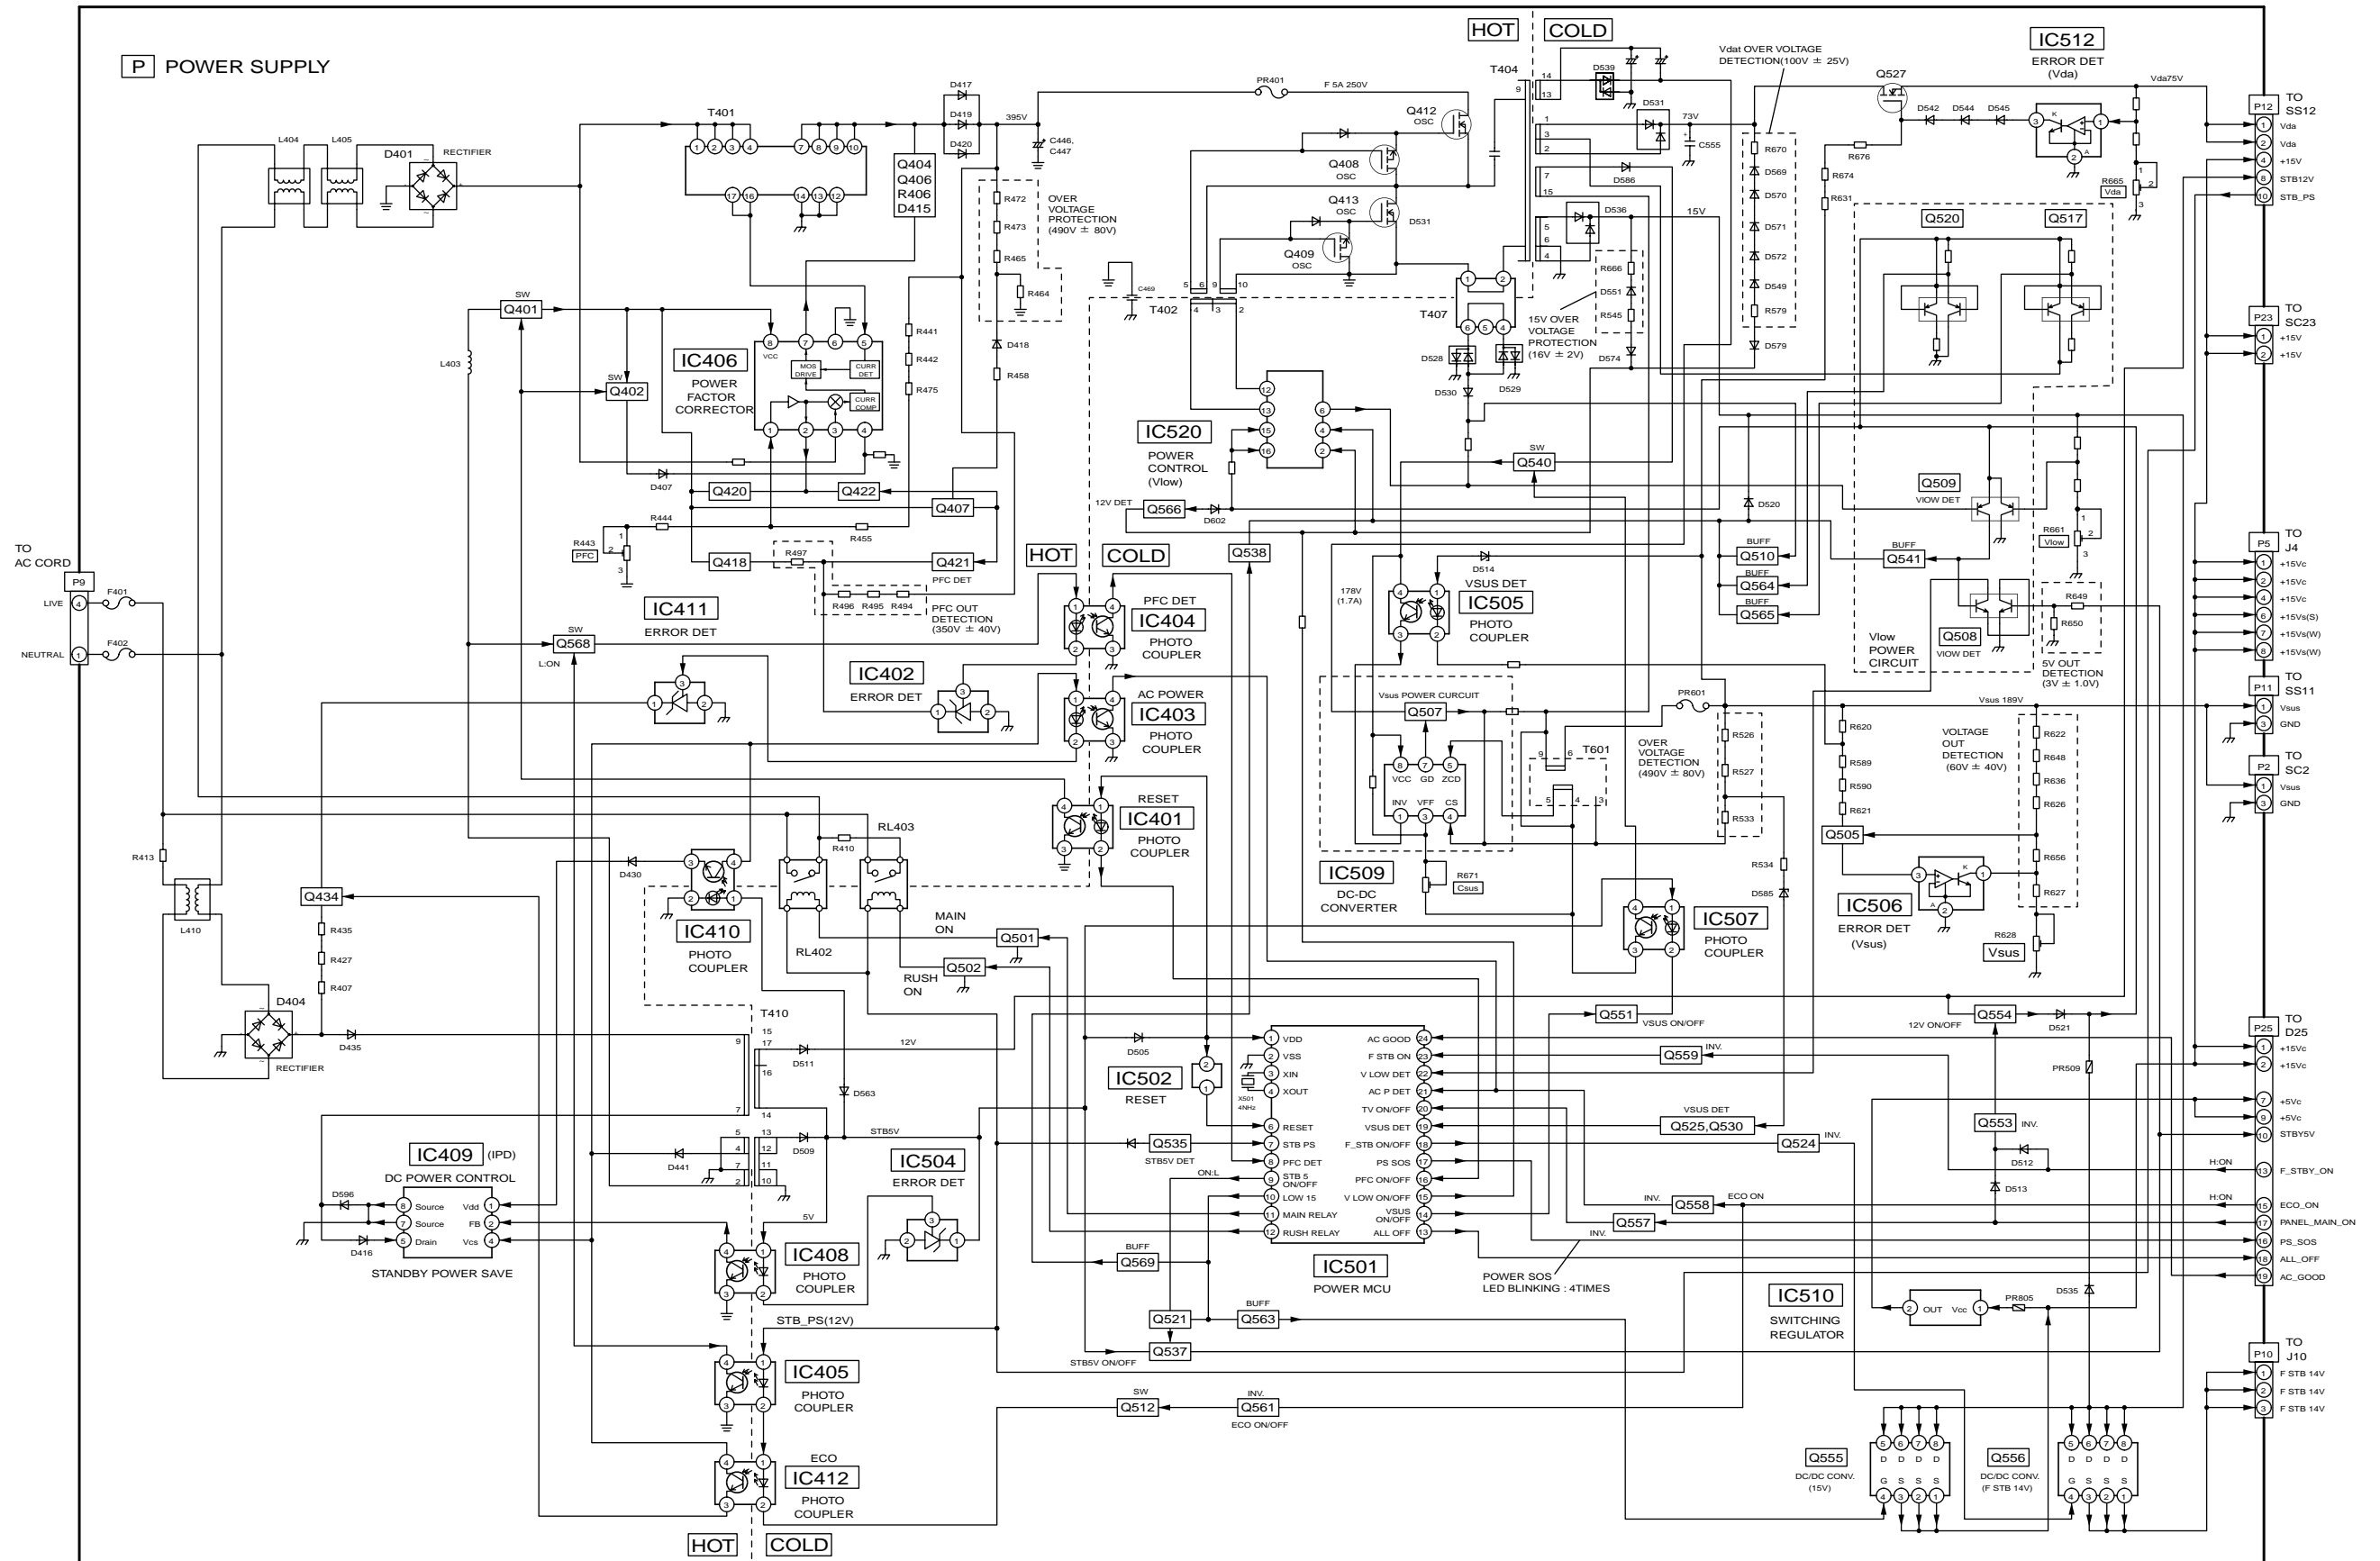

TH-42PR9U P-Board Block Diagram

TH-42PR9U P-Board Block Diagram


15.12. P-Board (1 of 6) Schematic Diagram (42inch)

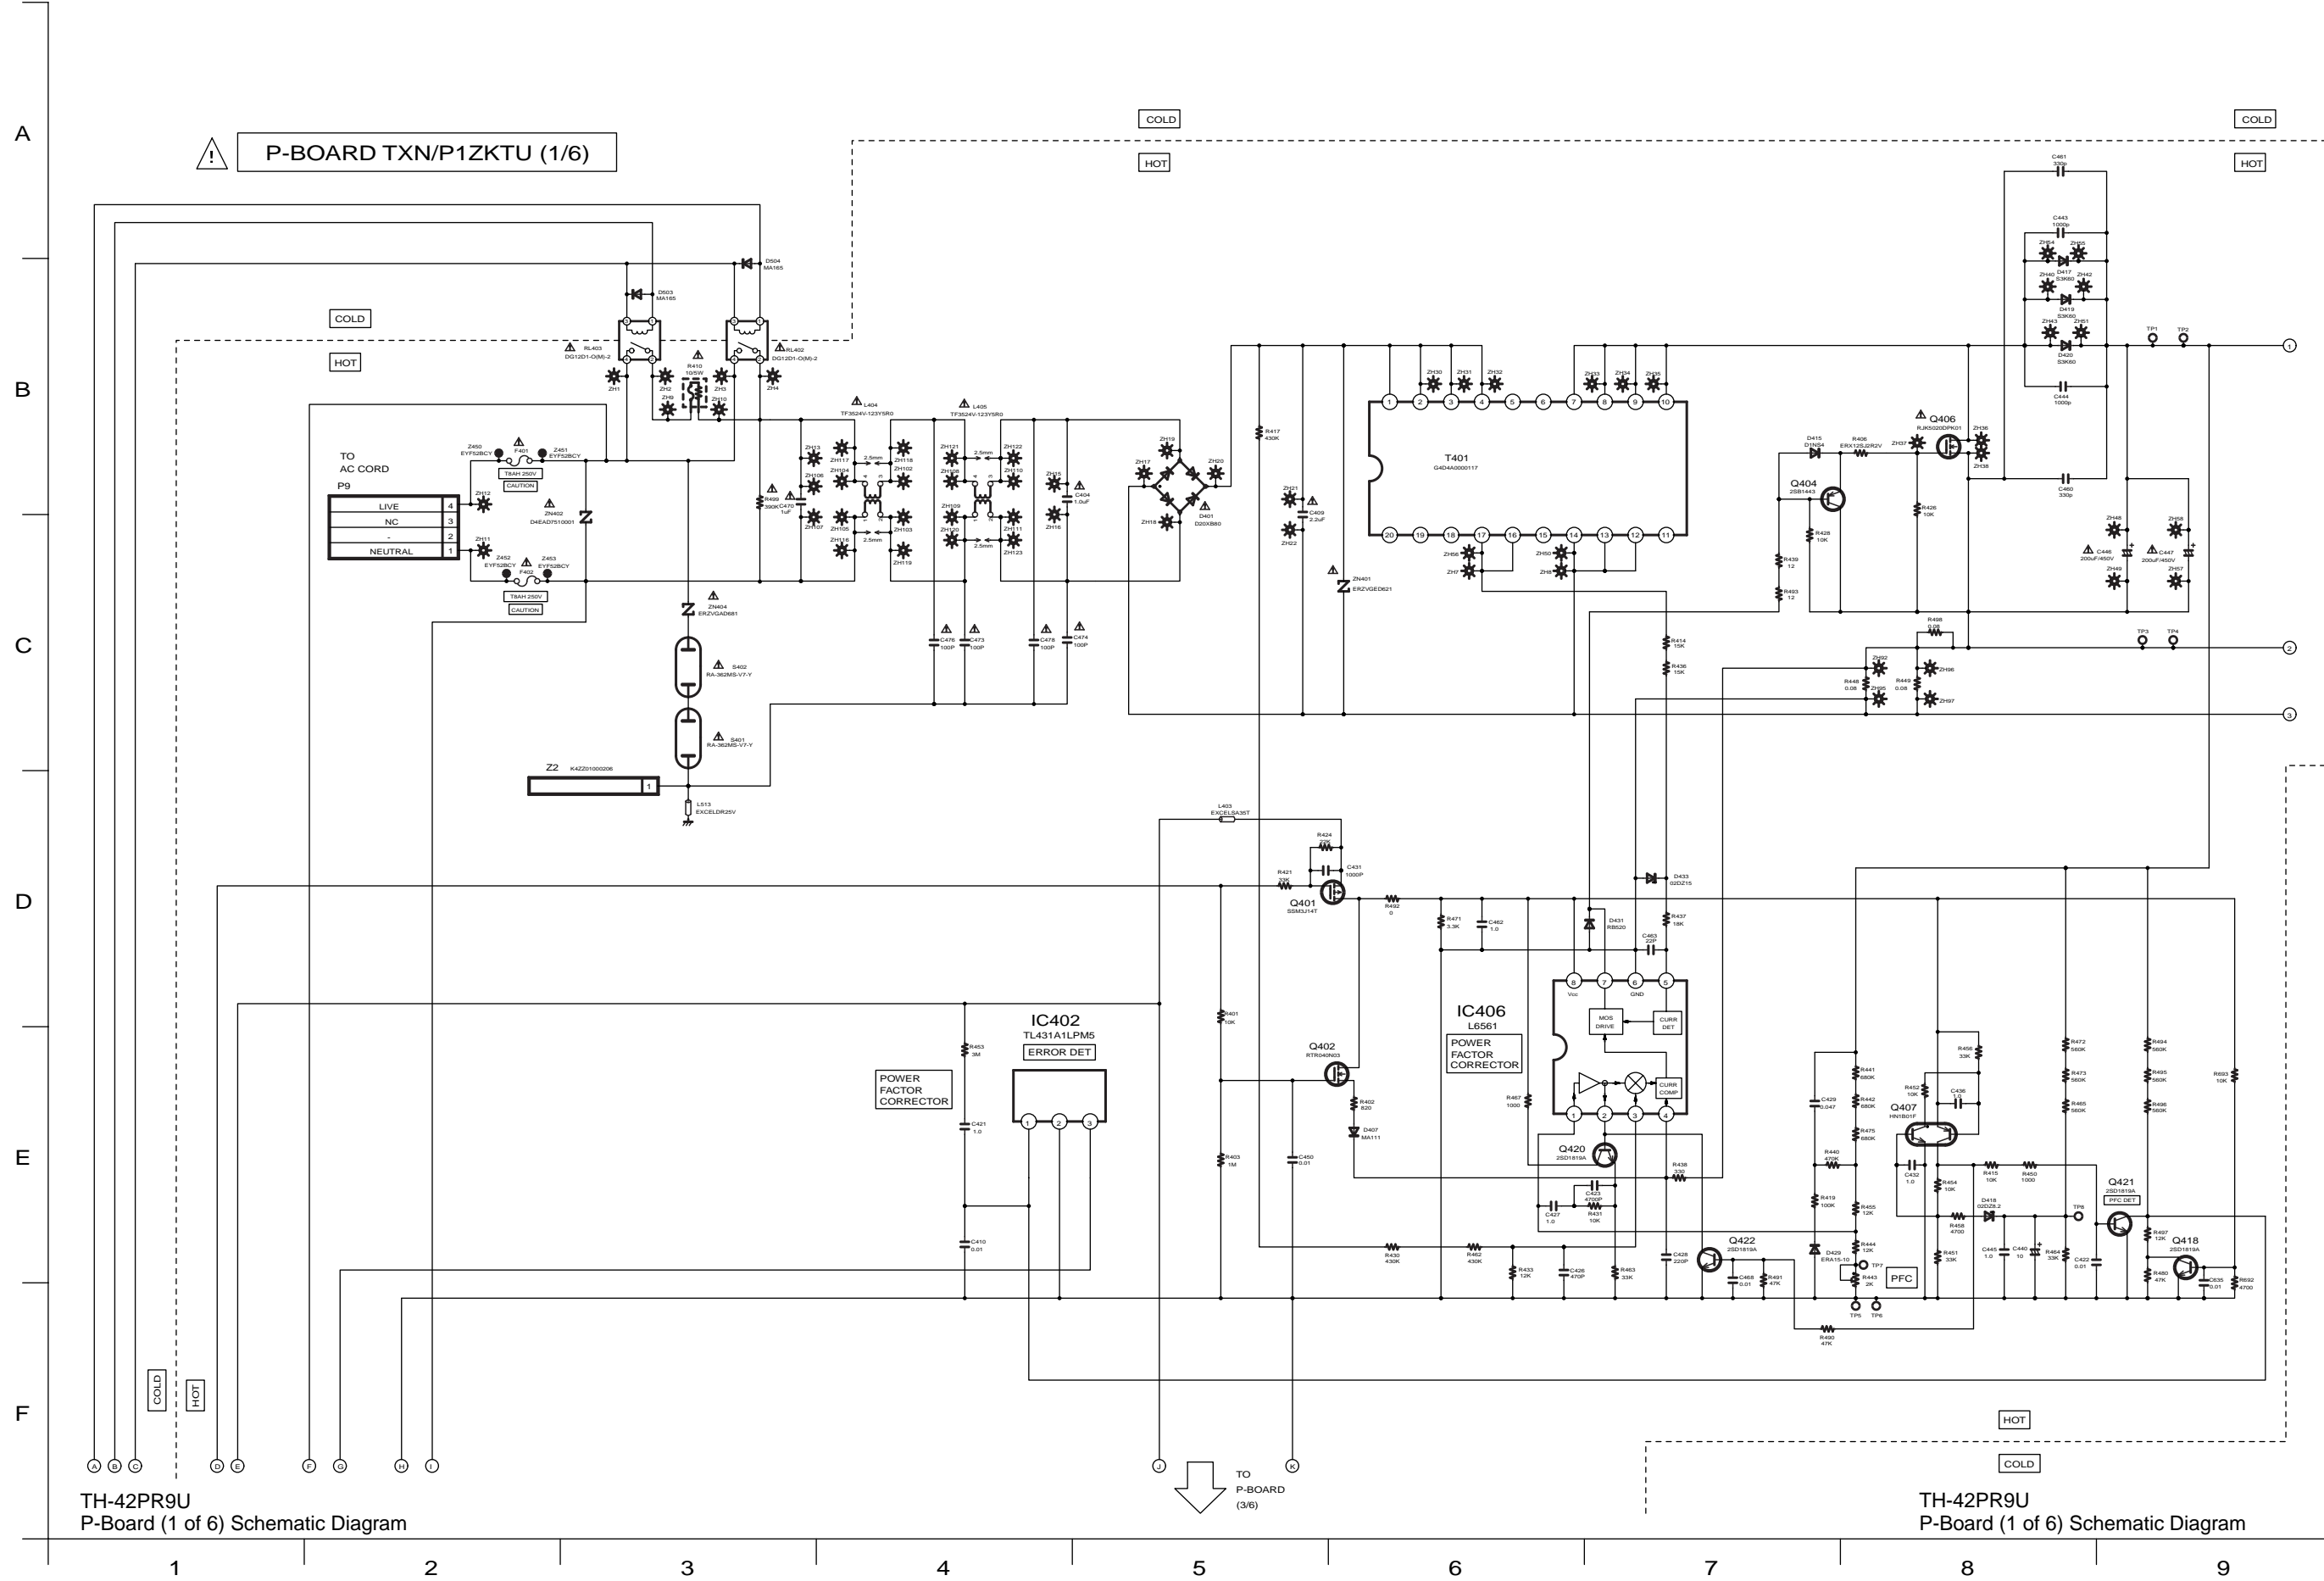






15.15. P-Board (4 of 6) Schematic Diagram (42inch)

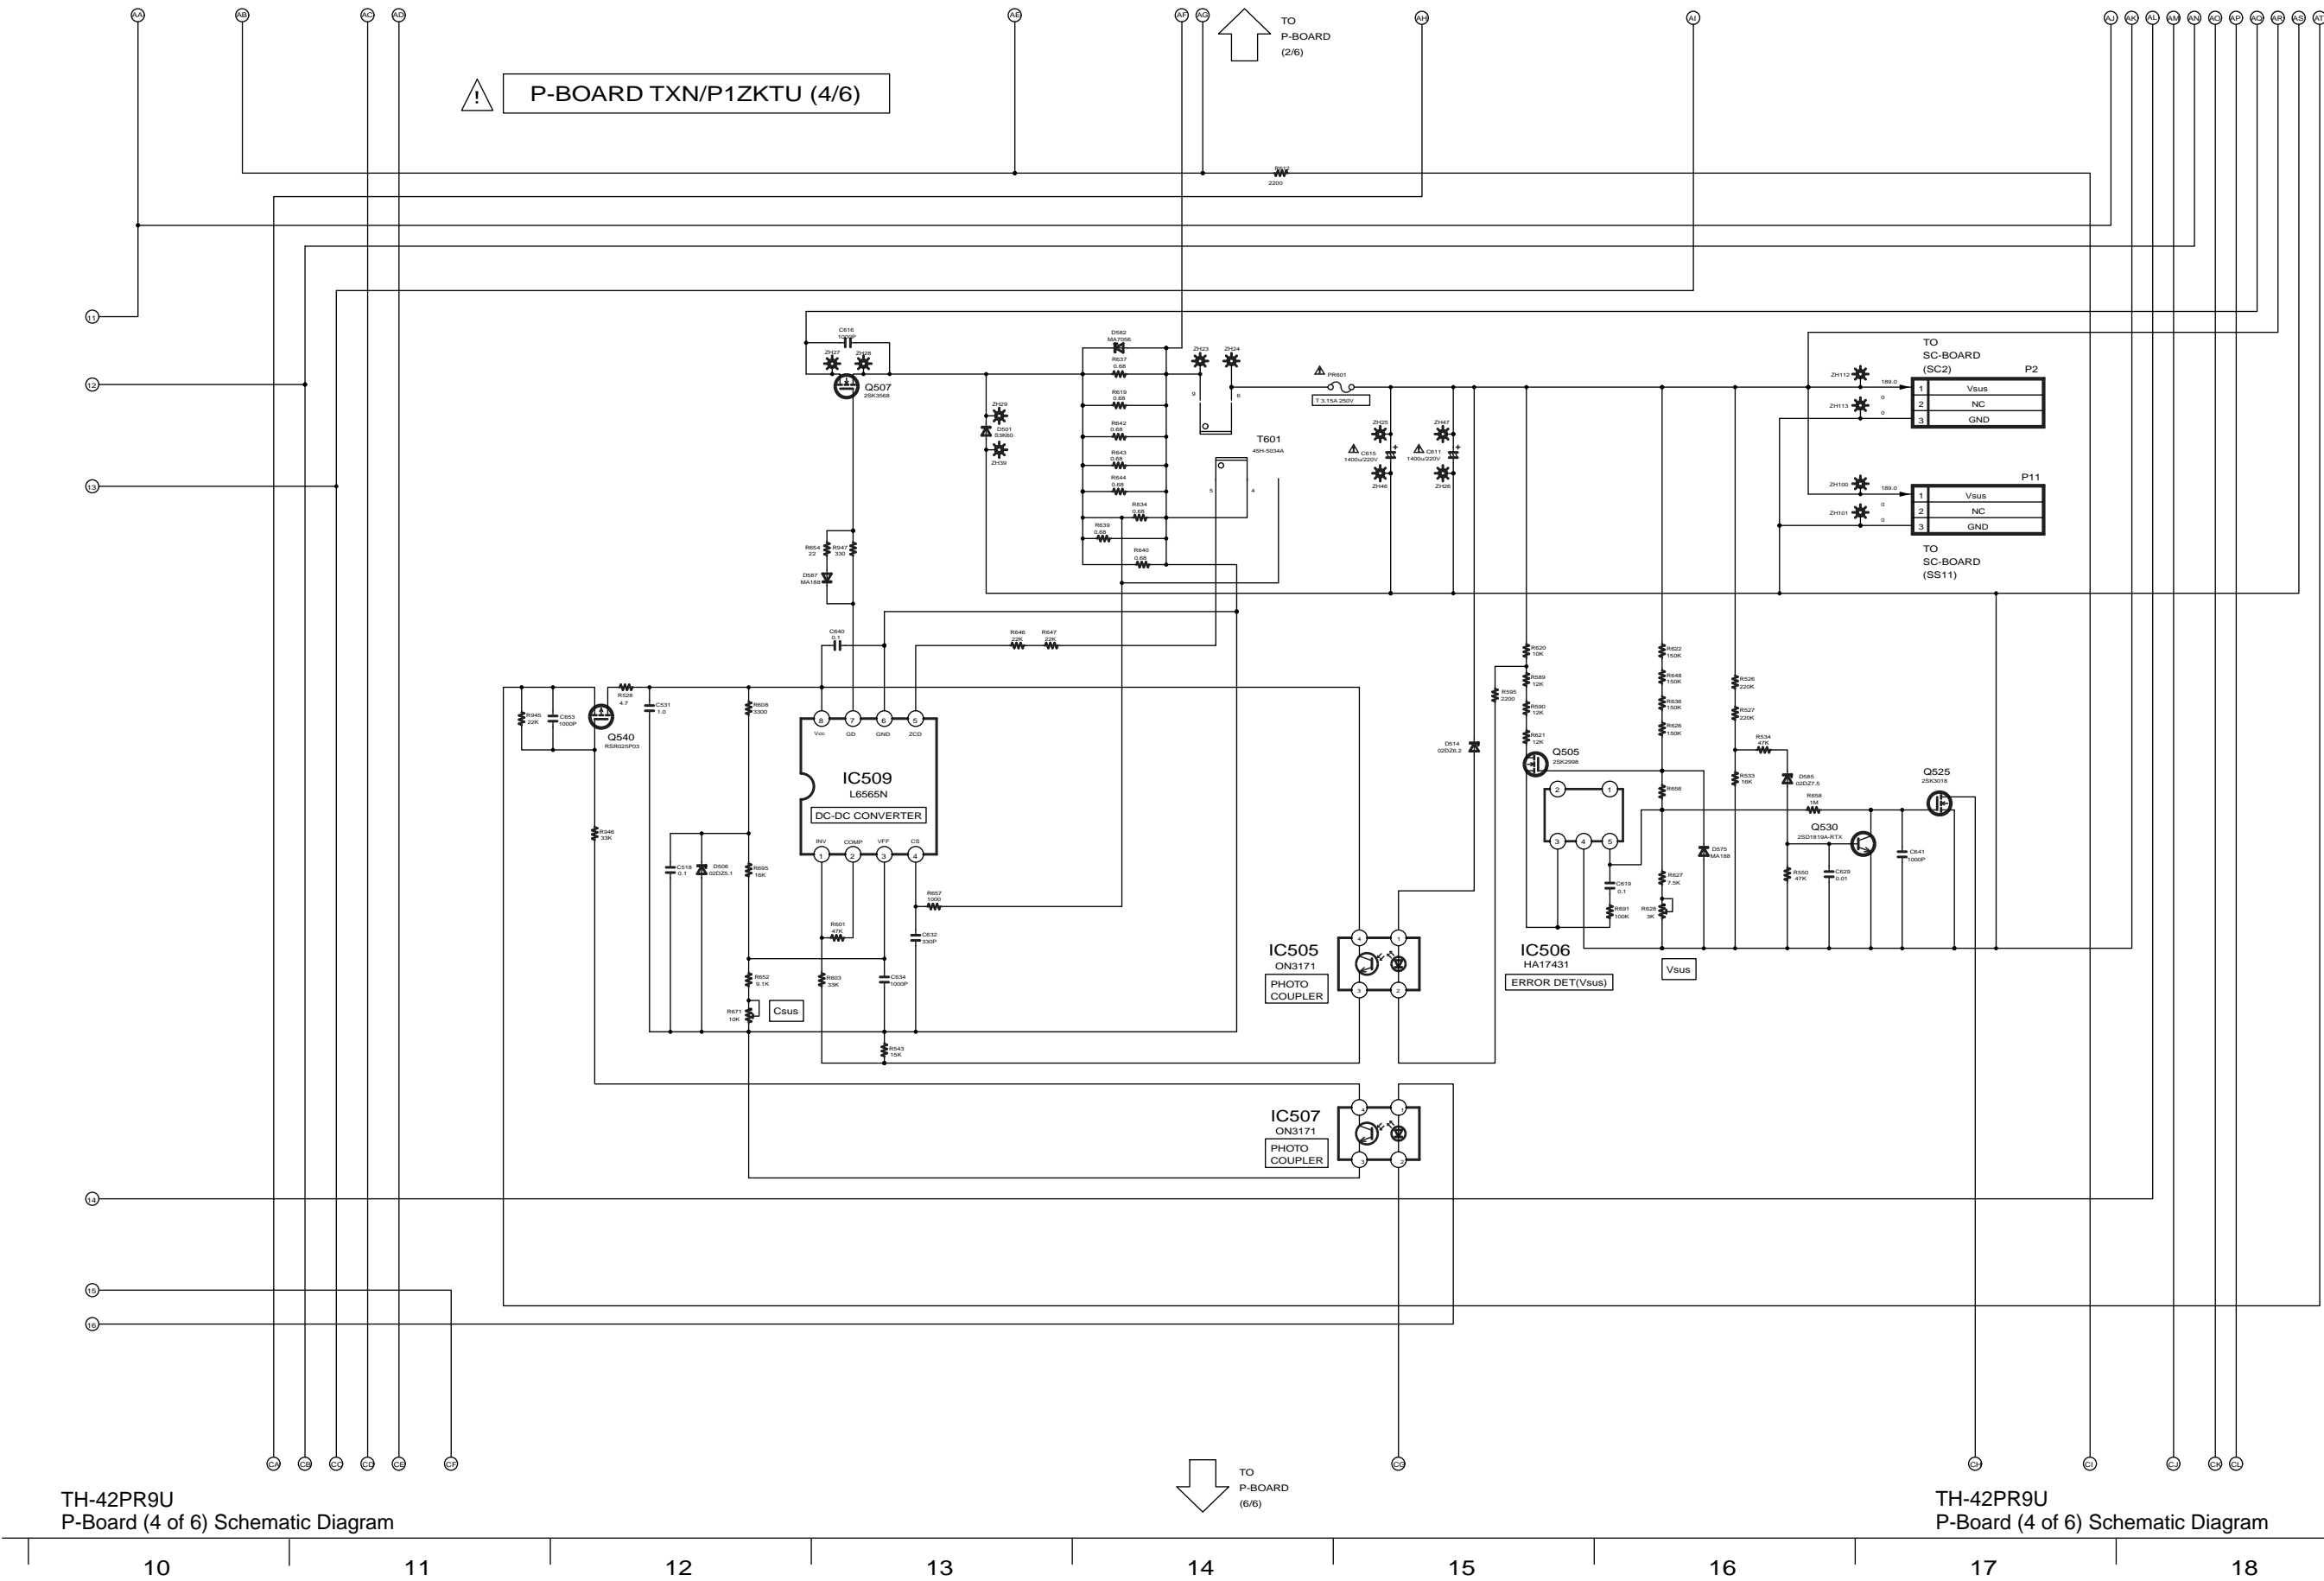


15.16. P-Board (5 of 6) Schematic Diagram (42inch)

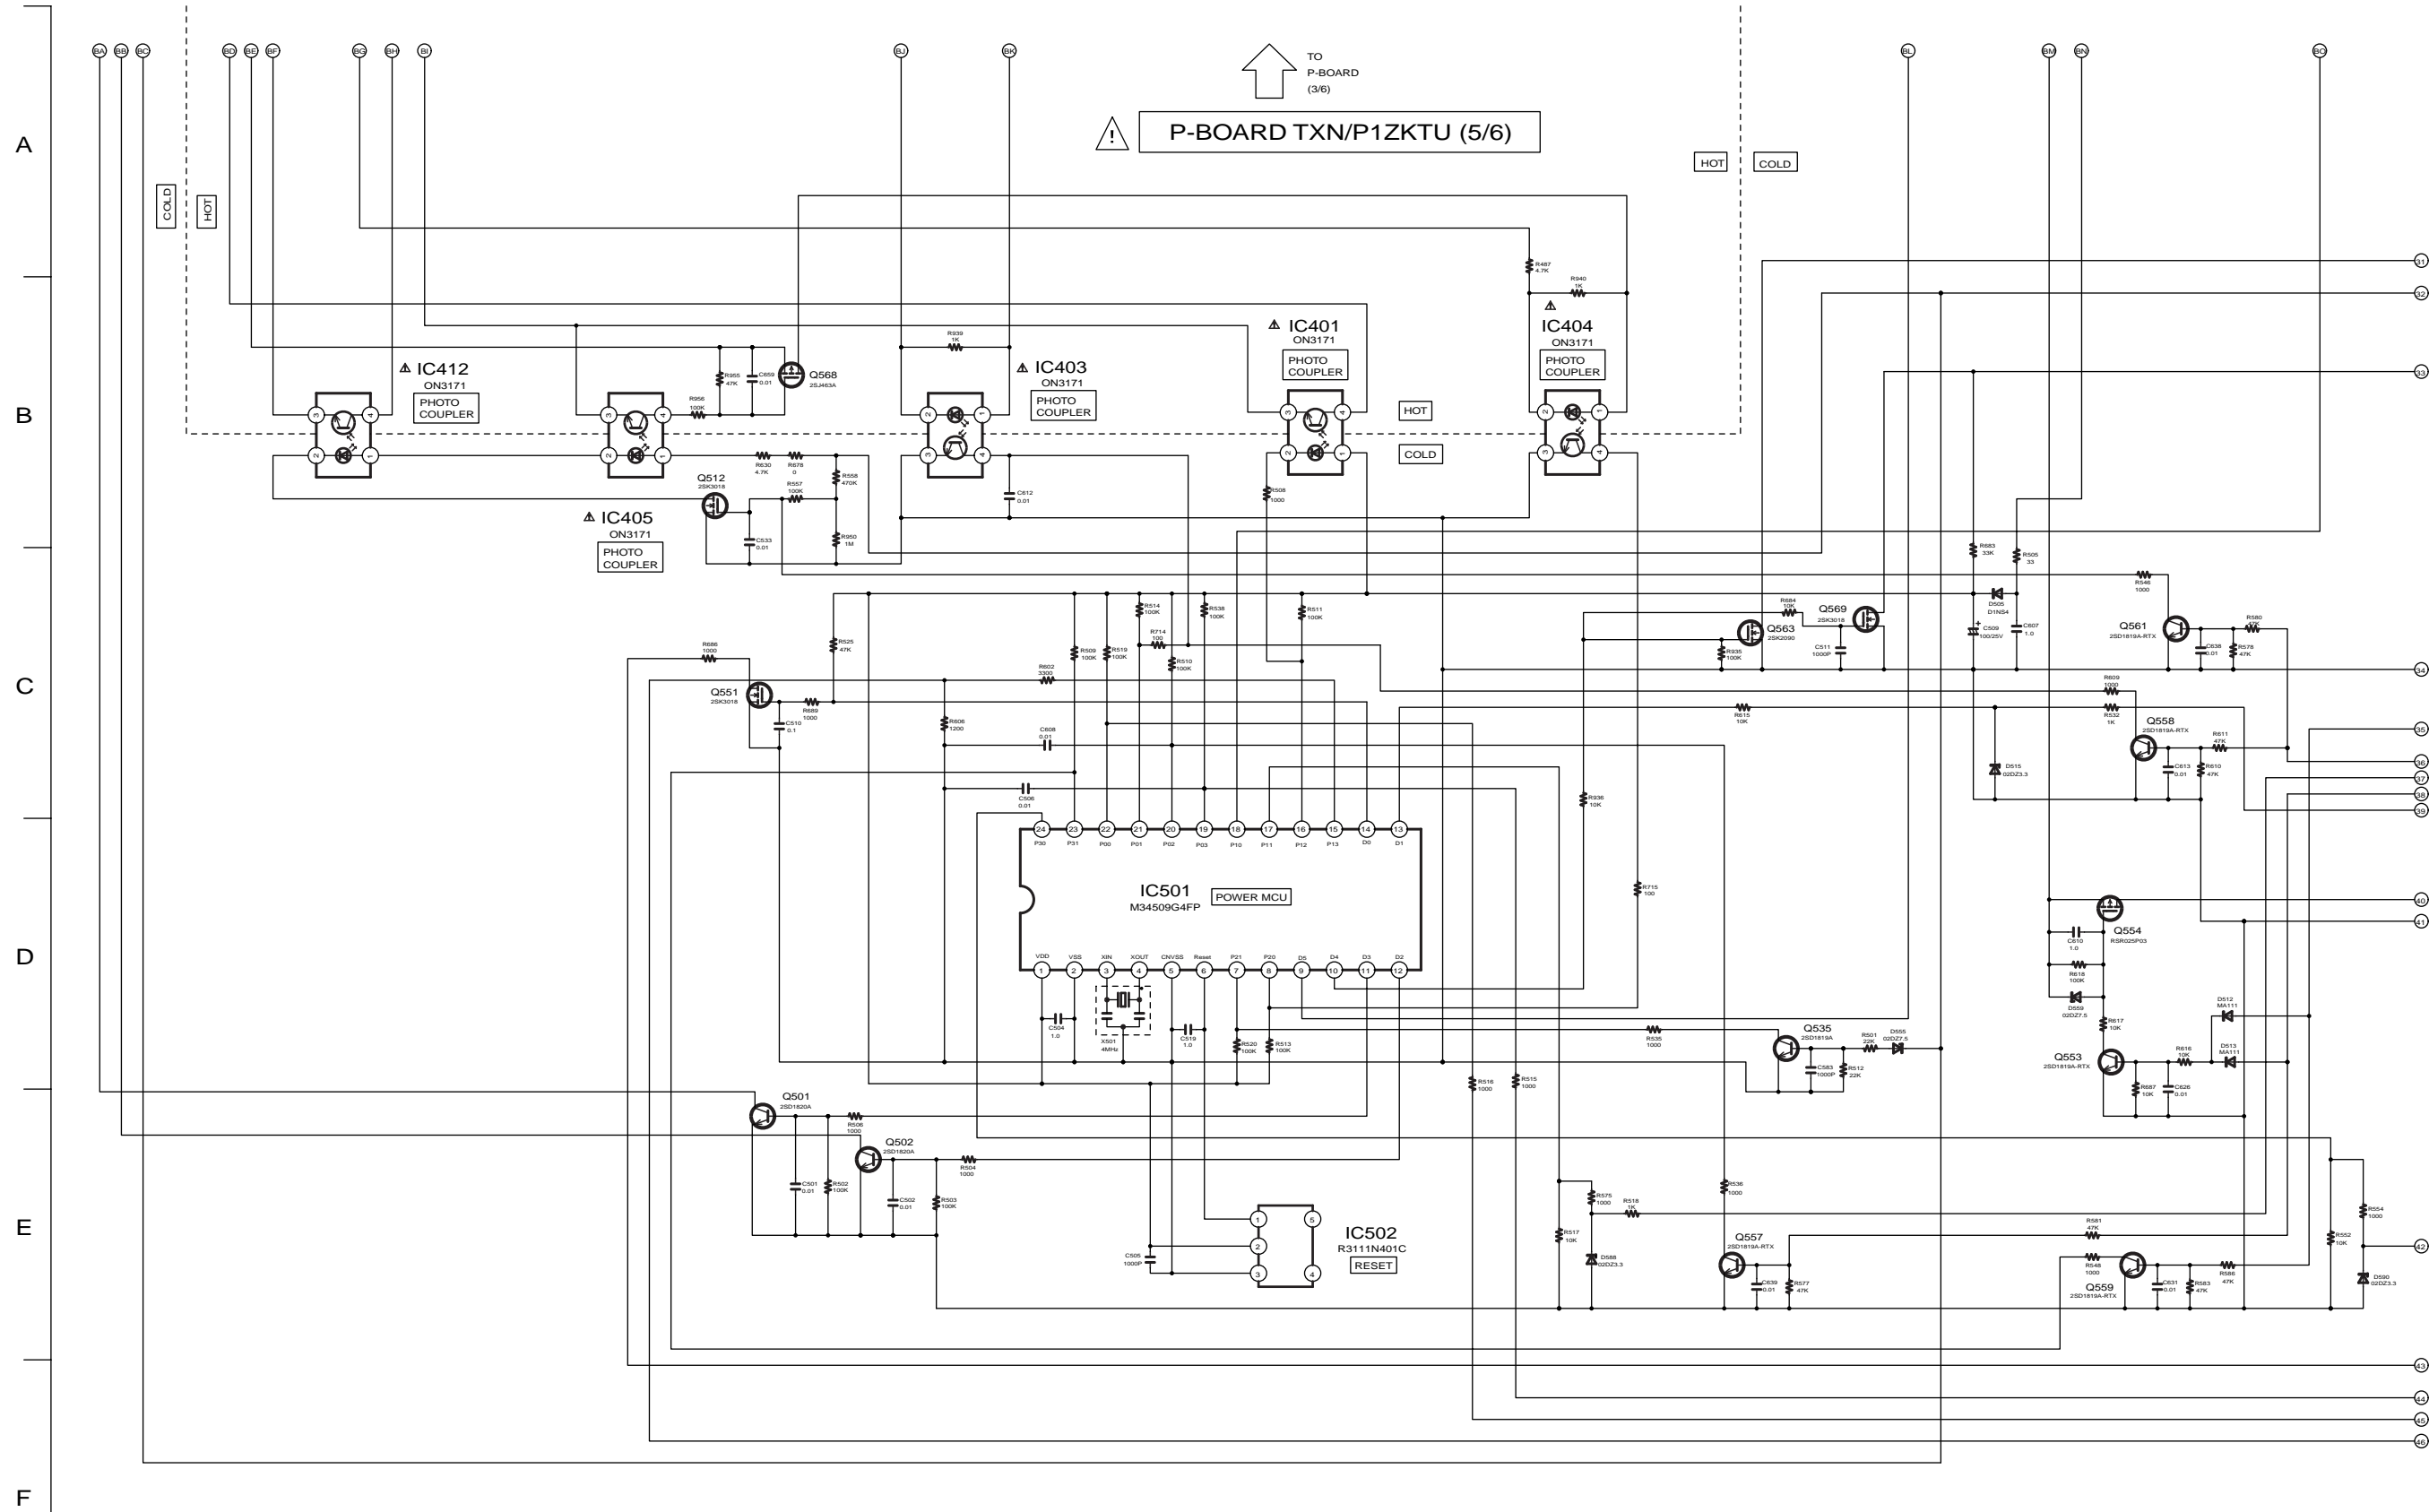

TH-42PR9U
P-Board (5 of 6) Schematic Diagram

TH-42PR9U
P-Board (5 of 6) Schematic Diagram

15.17. P-Board (6 of 6) Schematic Diagram (42inch)

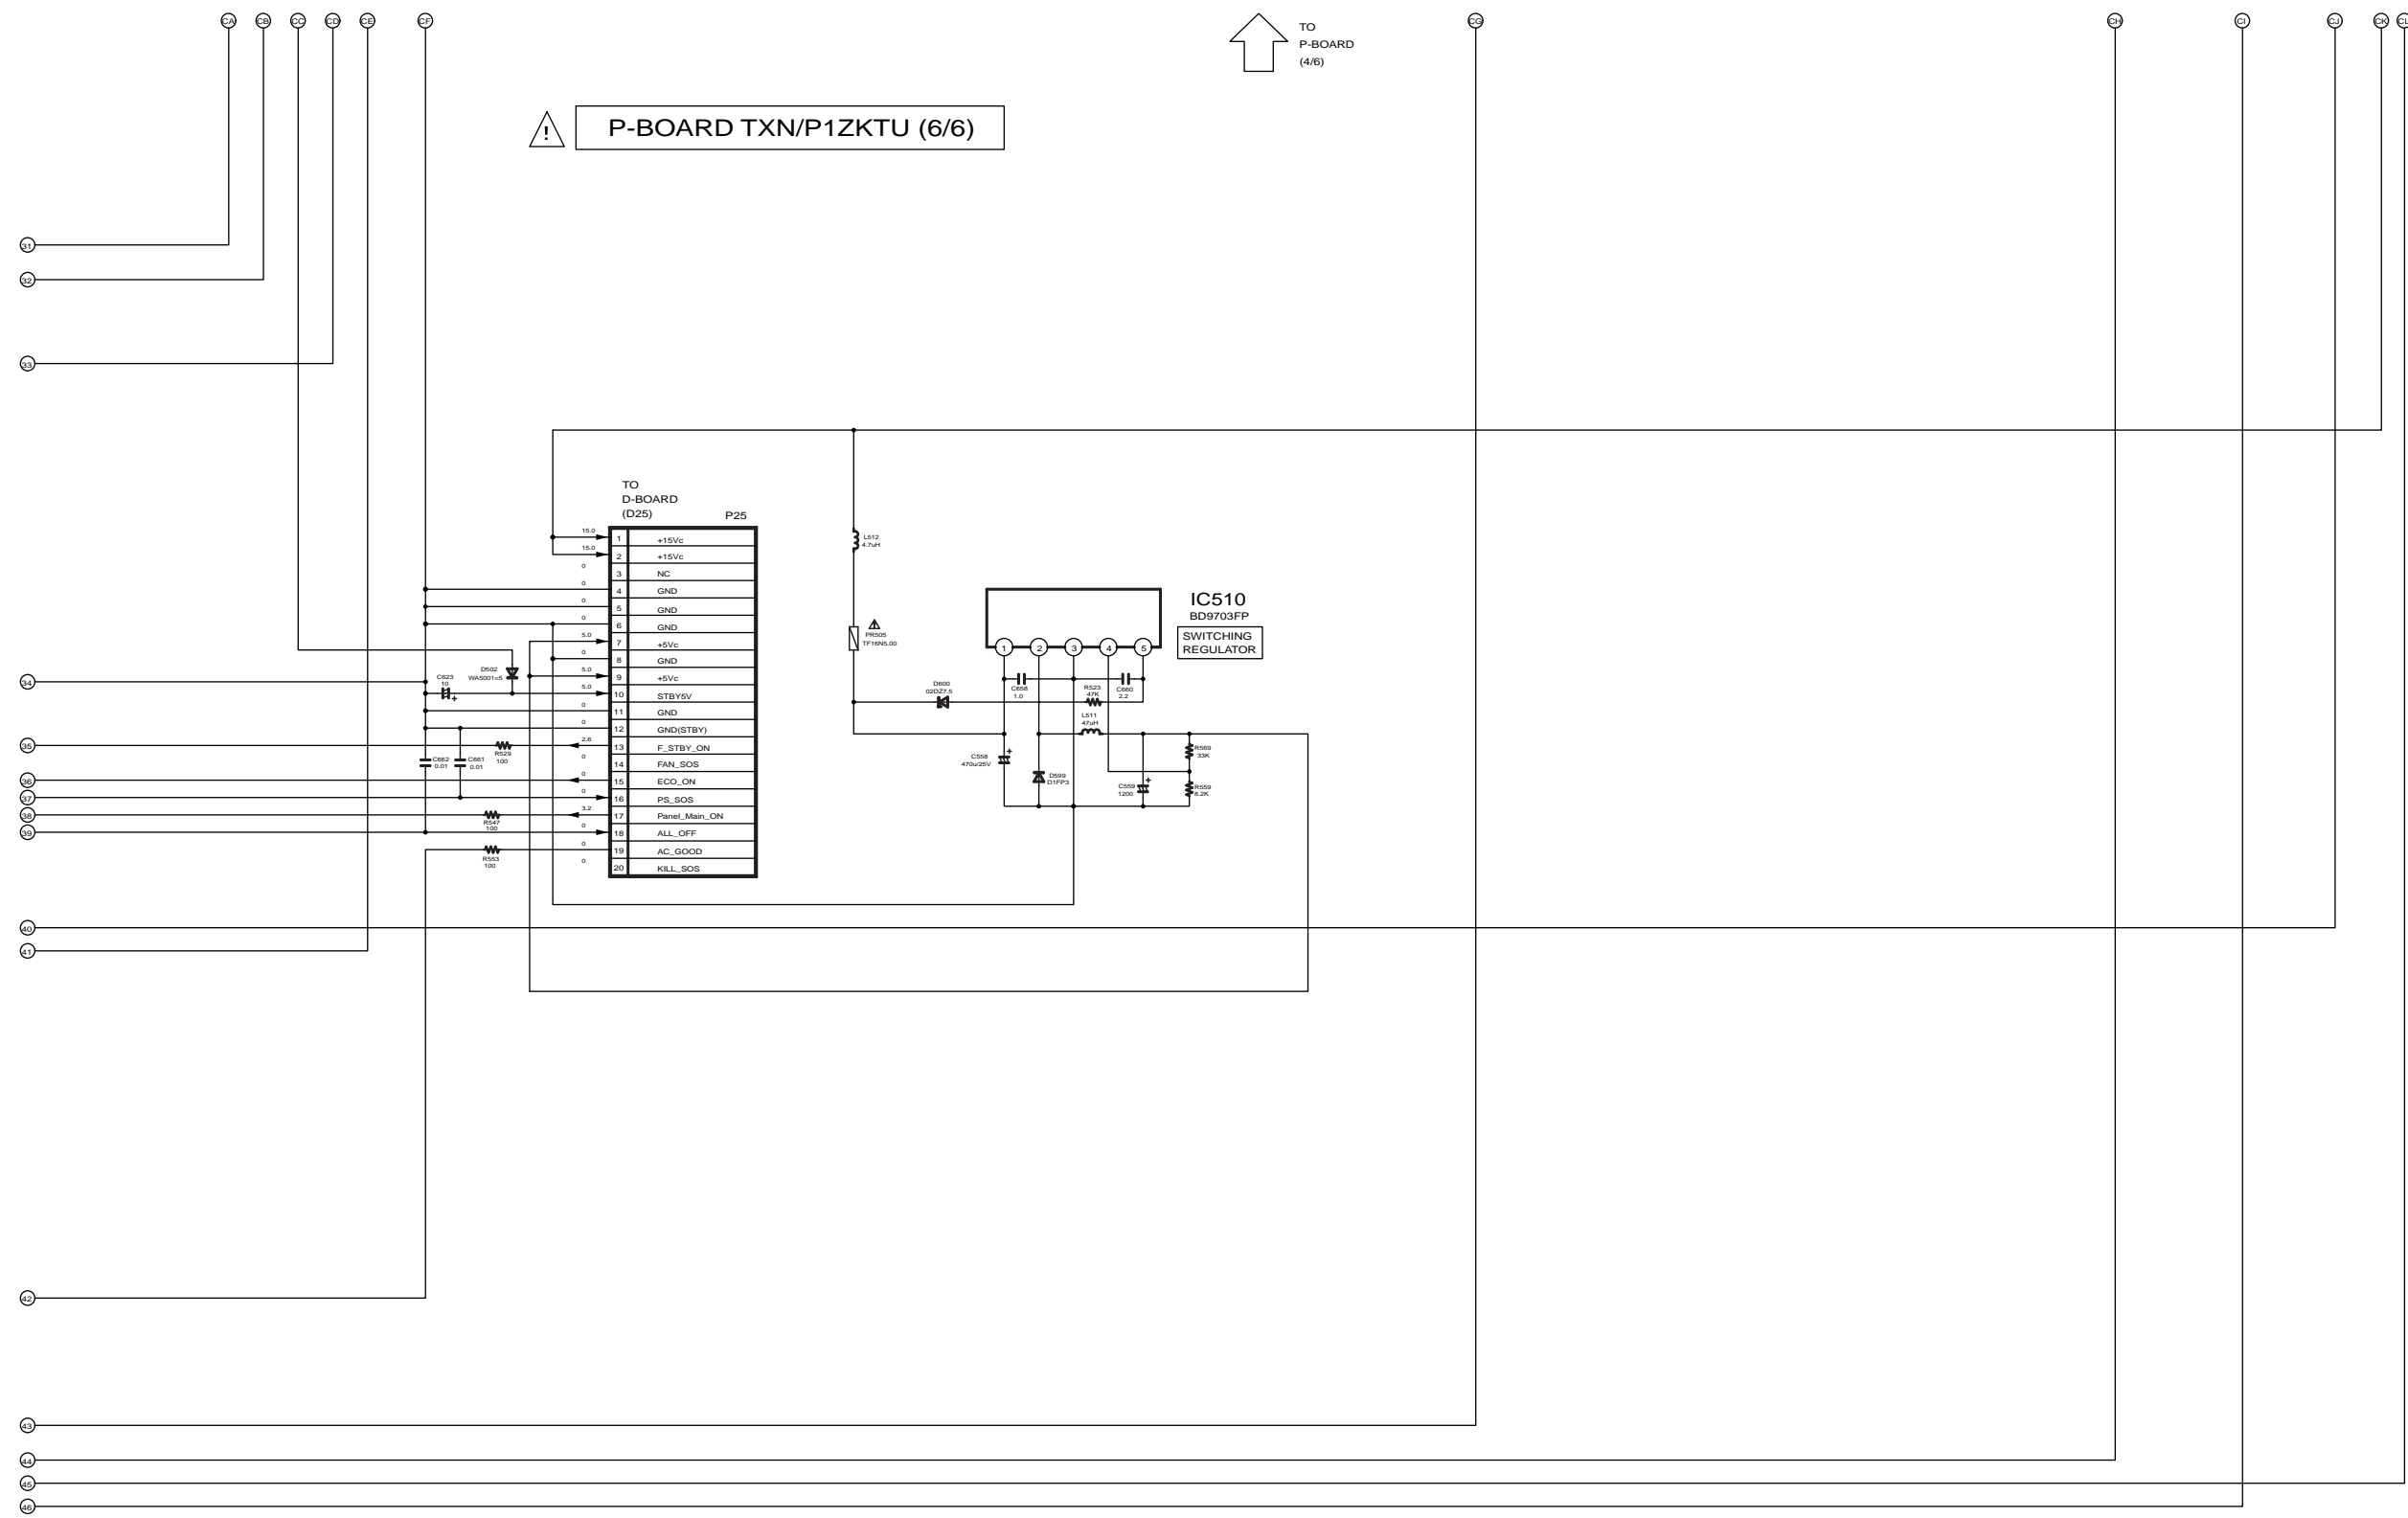

15.18. PB-Board Block and Schematic Diagram



A

B

C

D

E

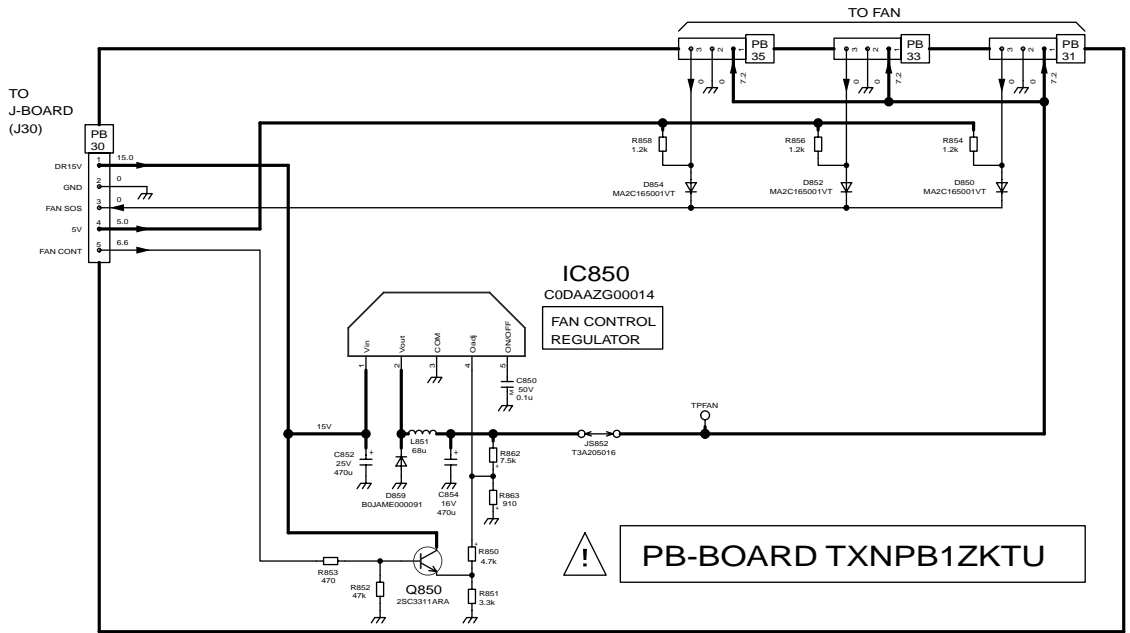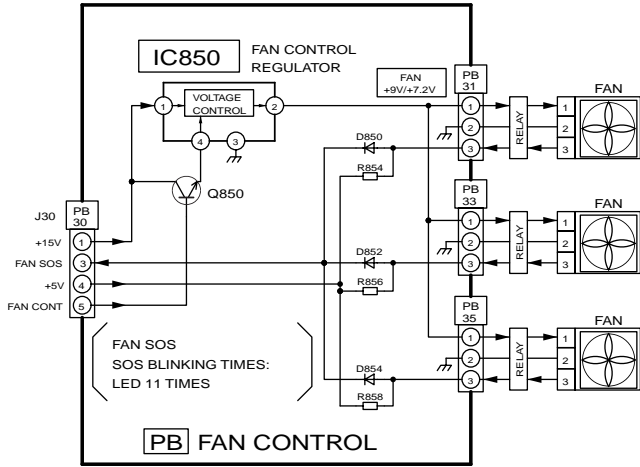

TH-37/42PR9U
PB-Board Block and Schematic Diagram

TH-37/42PR9U
PB-Board Block and Schematic Diagram

15.19. HX-Board Block and Schematic Diagram


A

B


C

D





E

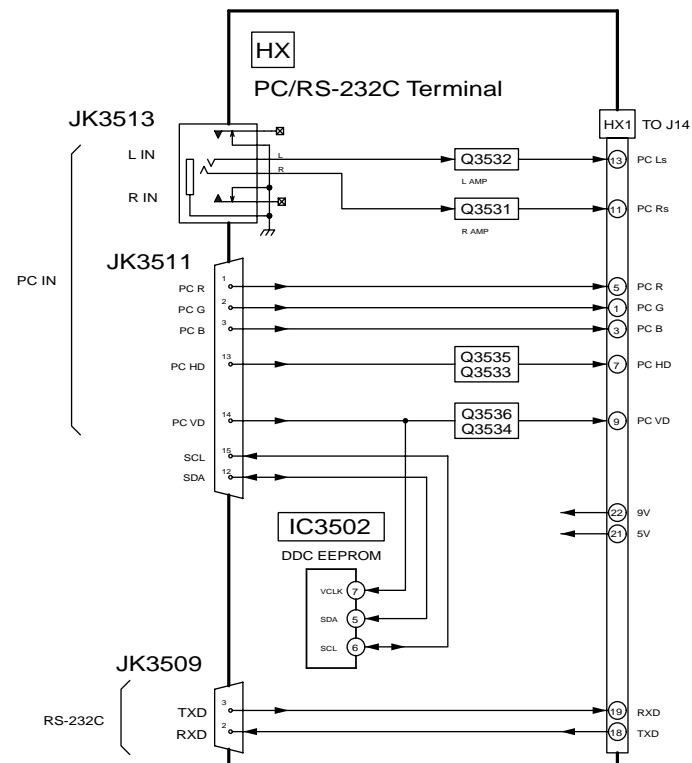TH-37/42PR9U
HX-Board Block and Schematic Diagram


HX-BOARD TNPA2842S

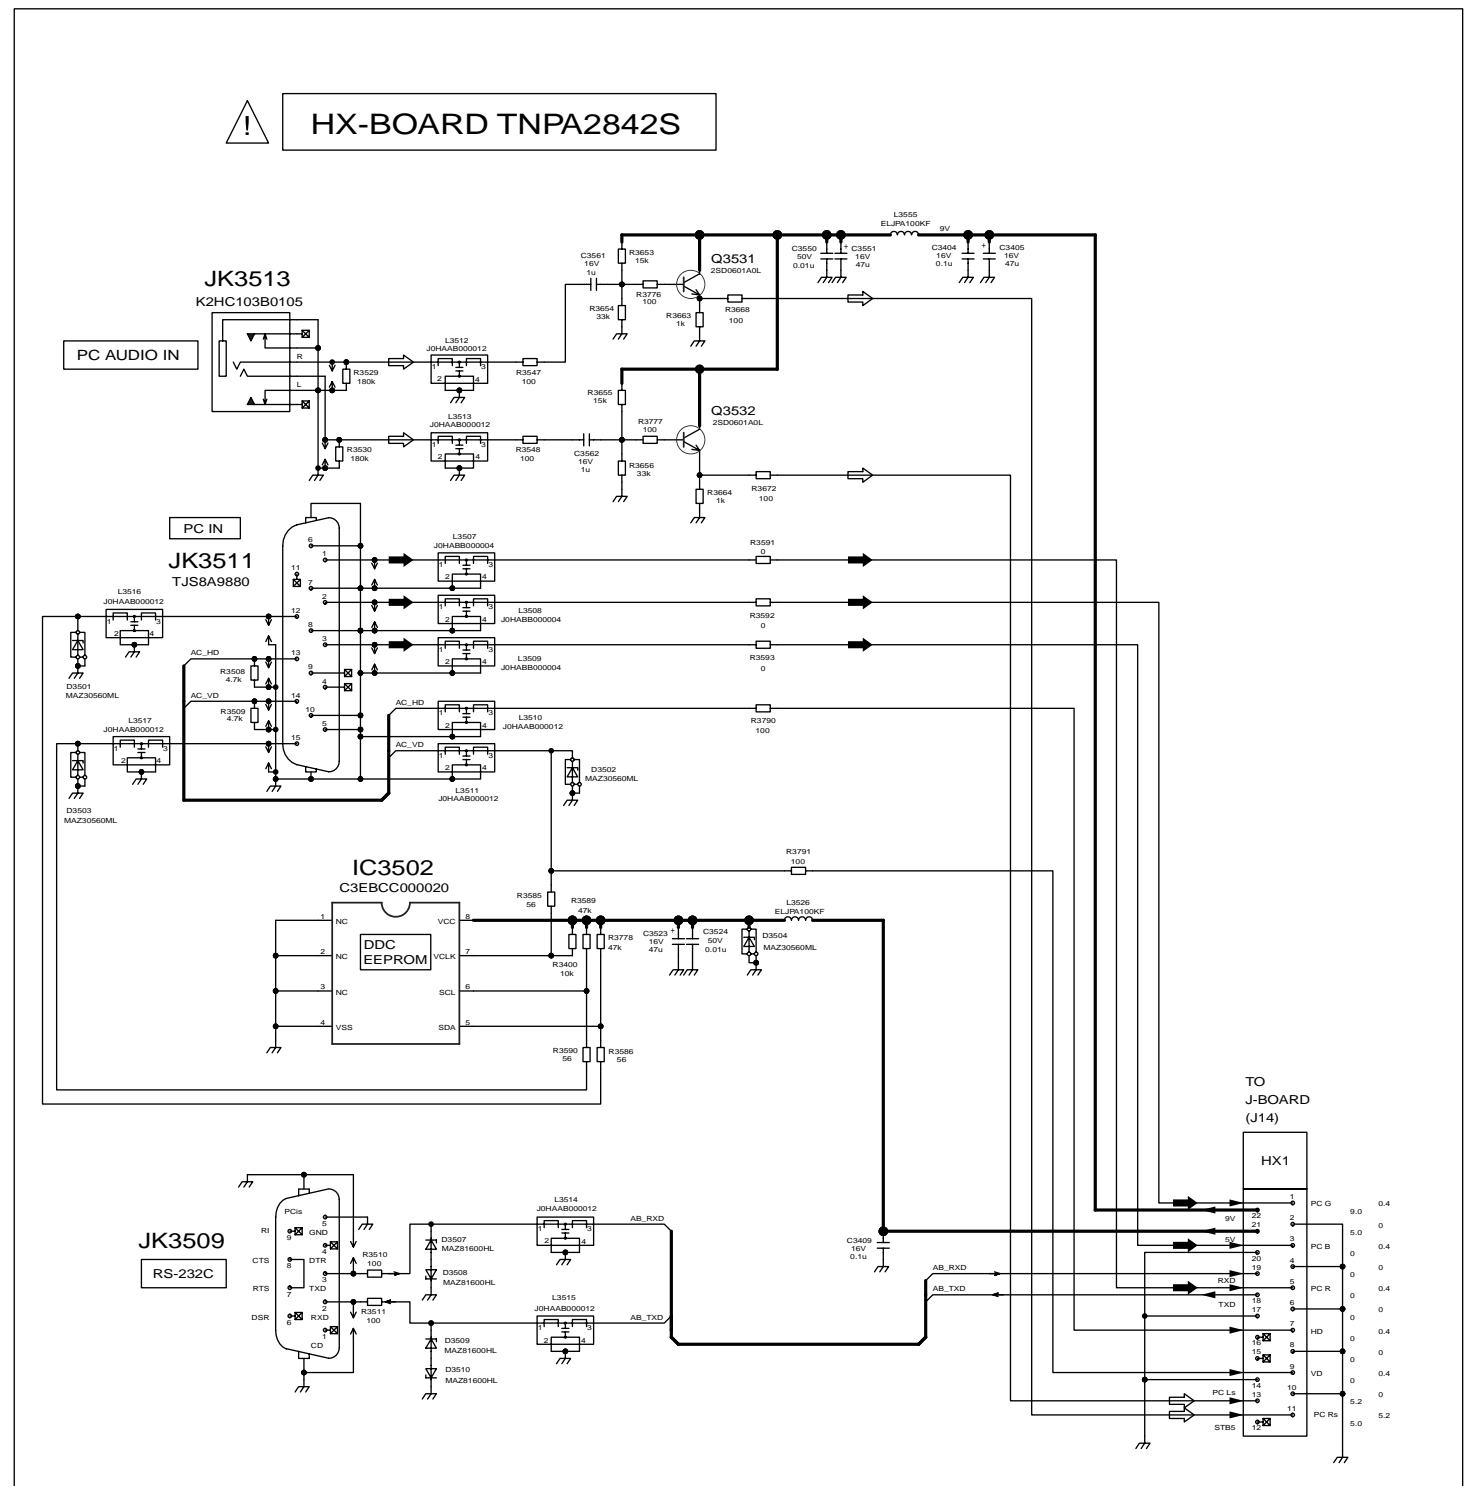
TH-37/42PR9U
HX-Board Block and Schematic Diagram


15.20. GK and K-Board Block and Schematic Diagram

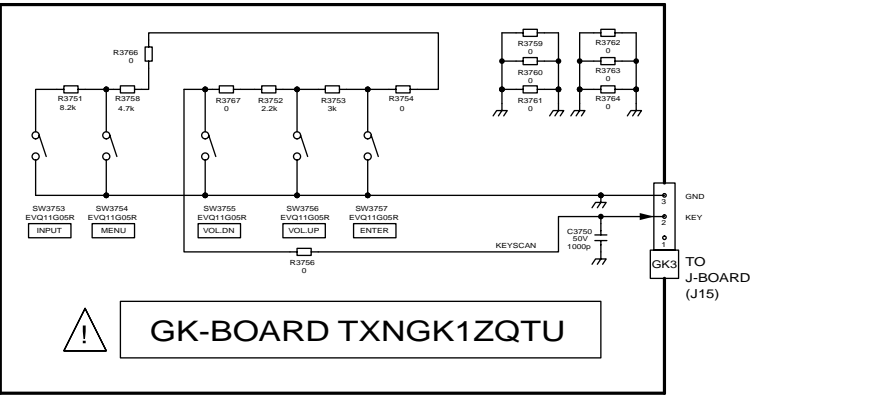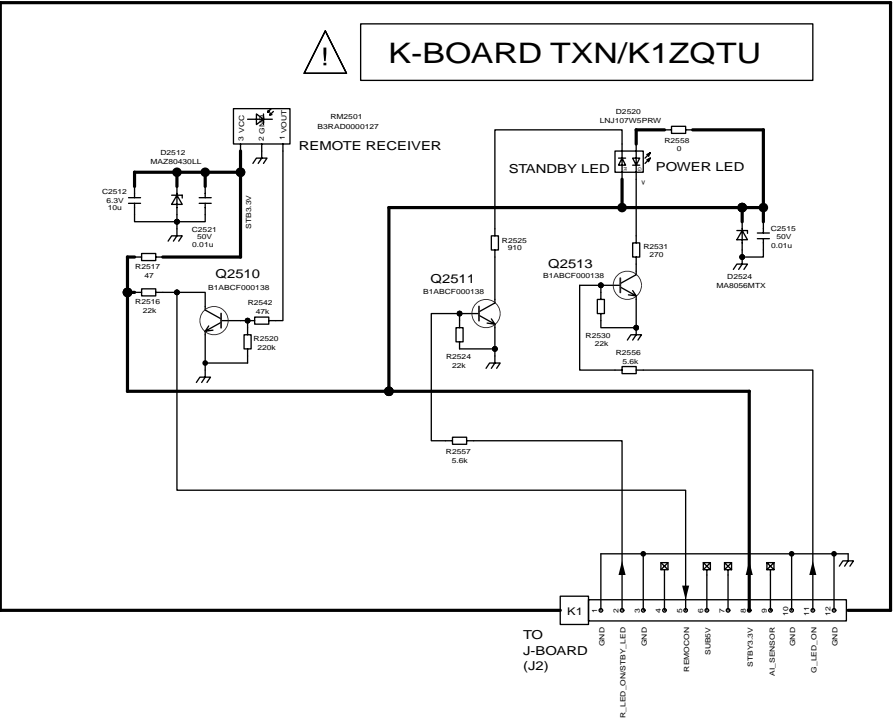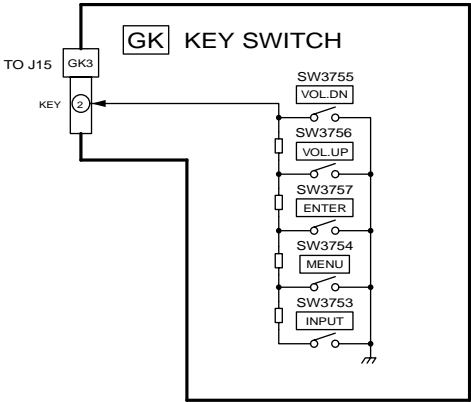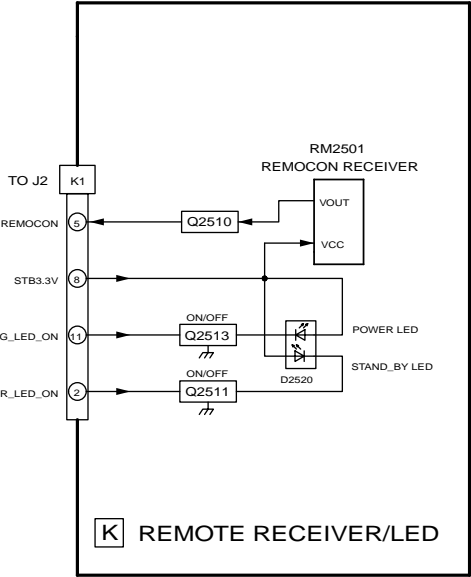


15.21. J-Board (1 of 2) Block Diagram

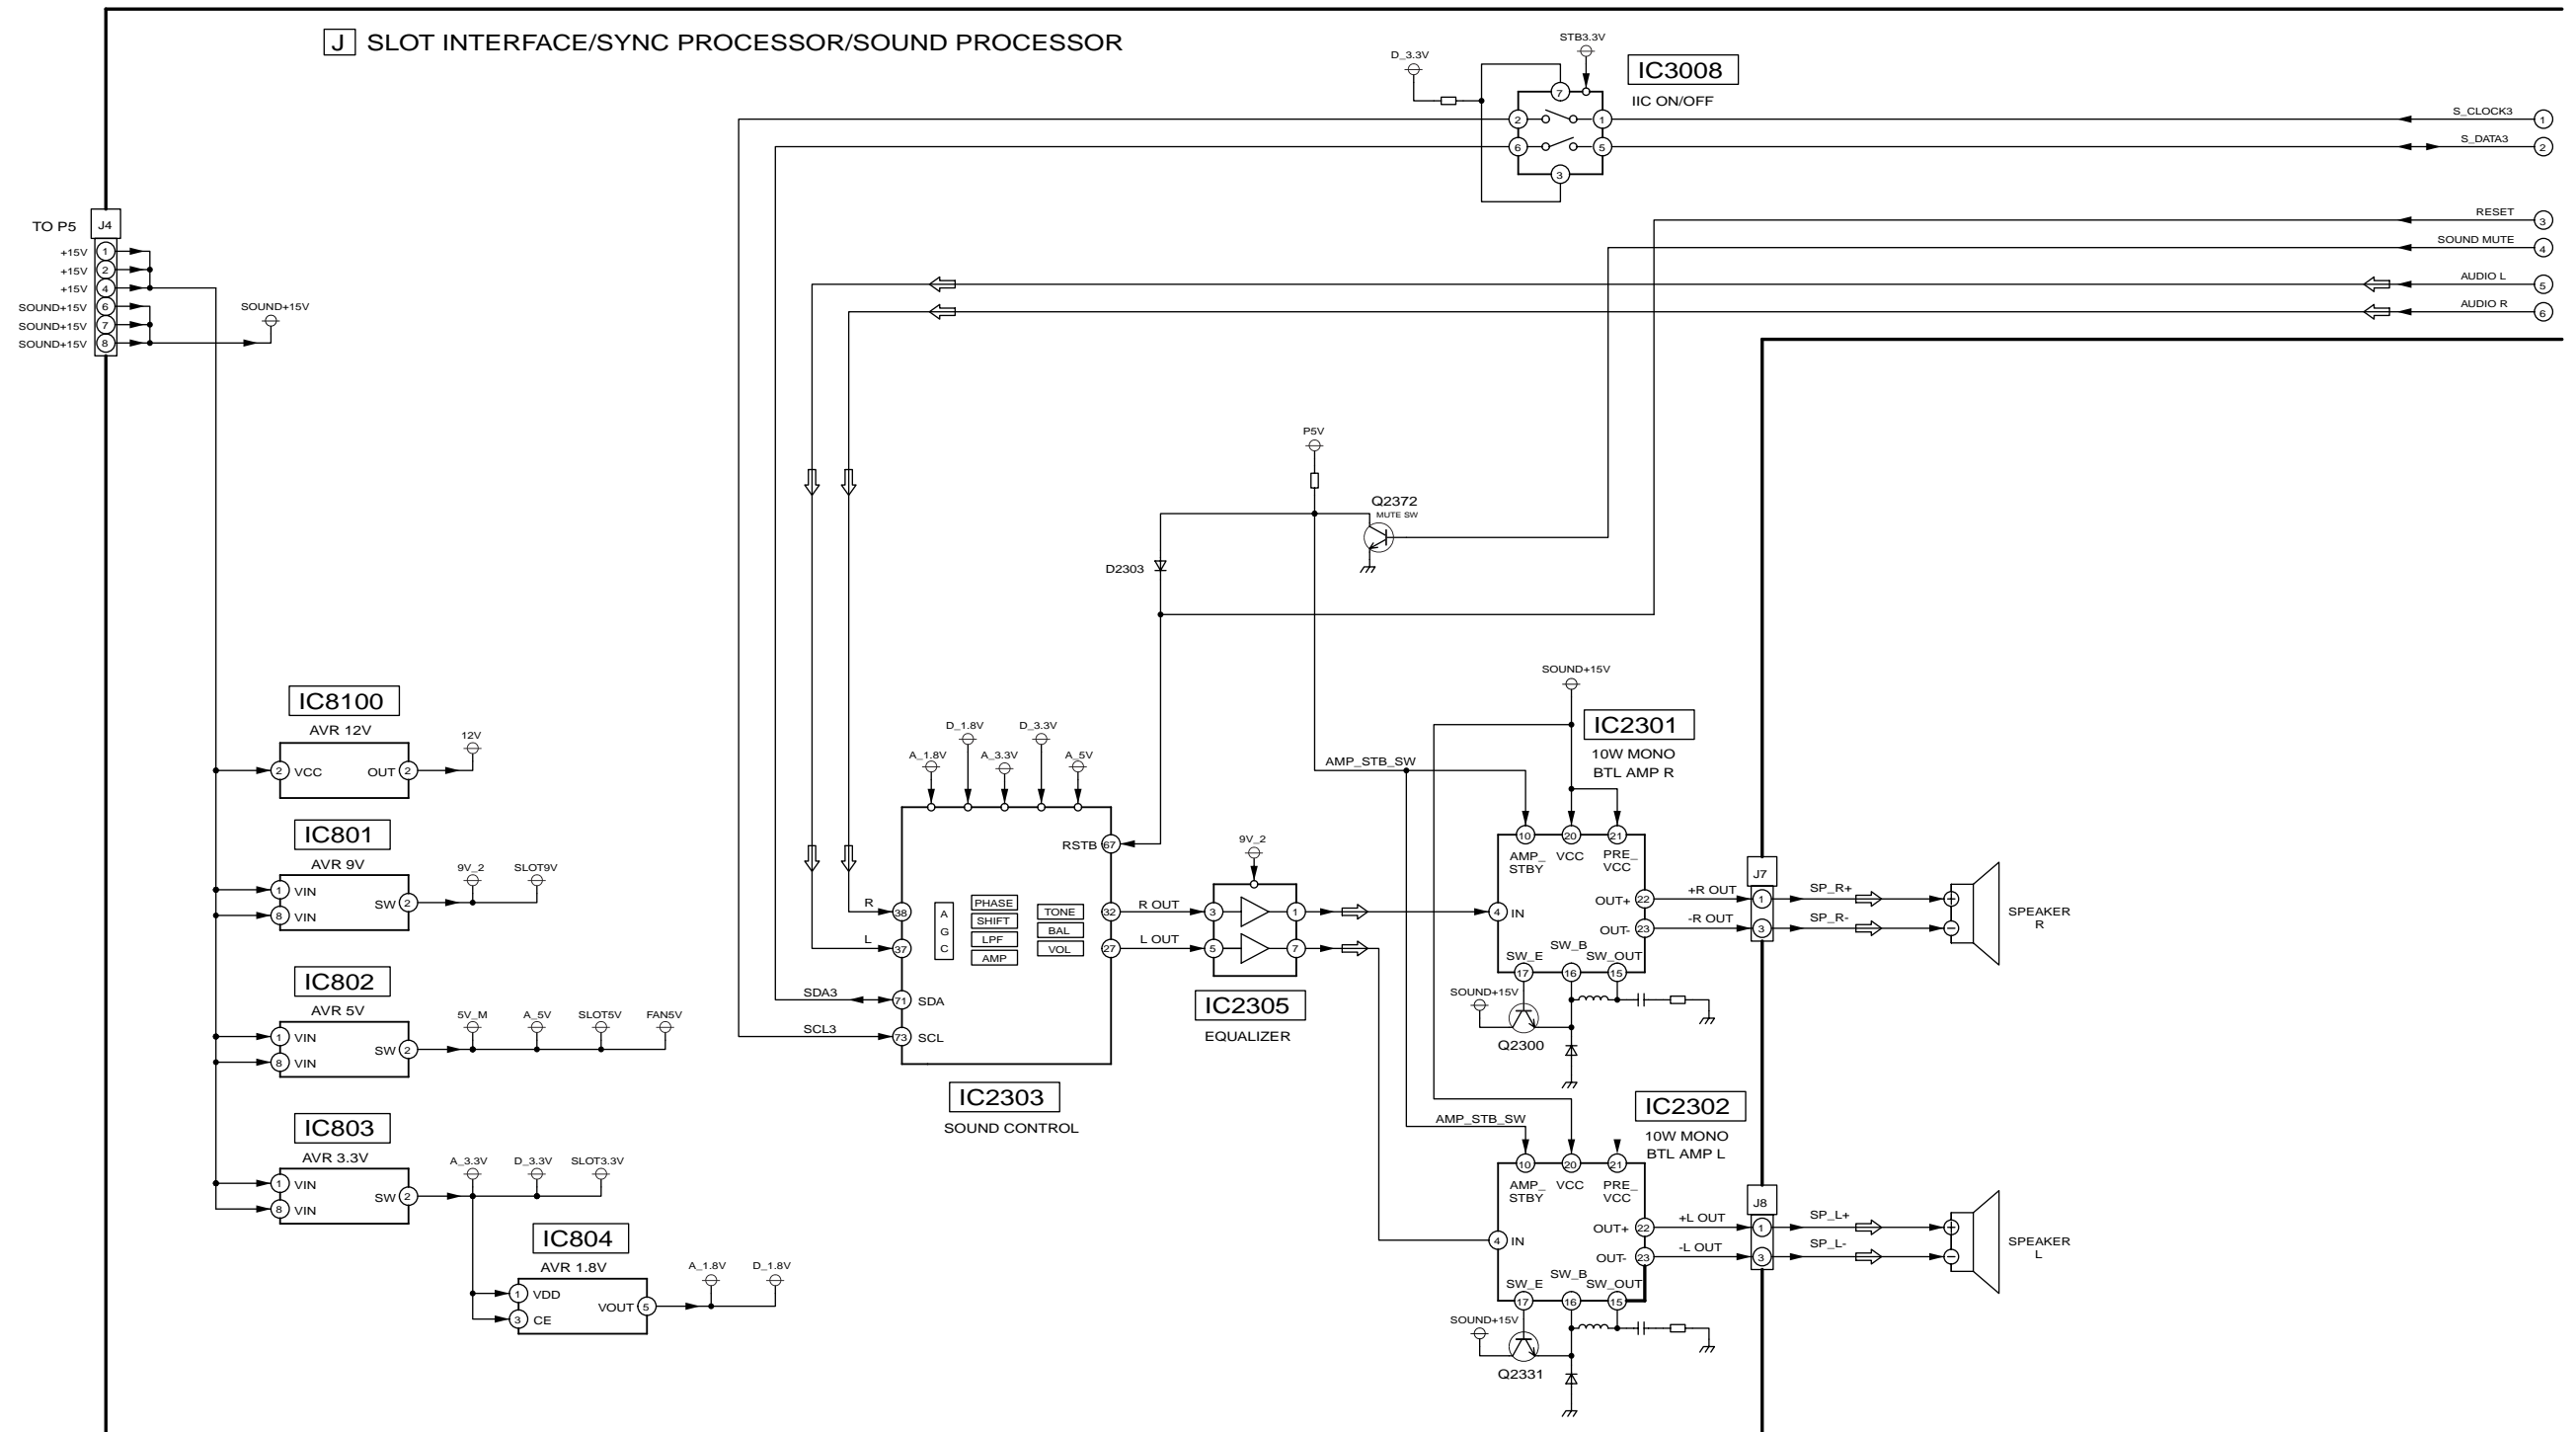








15.25. J-Board (3 of 5) Schematic Diagram

J-BOARD TNPA3896ABS (3/5)

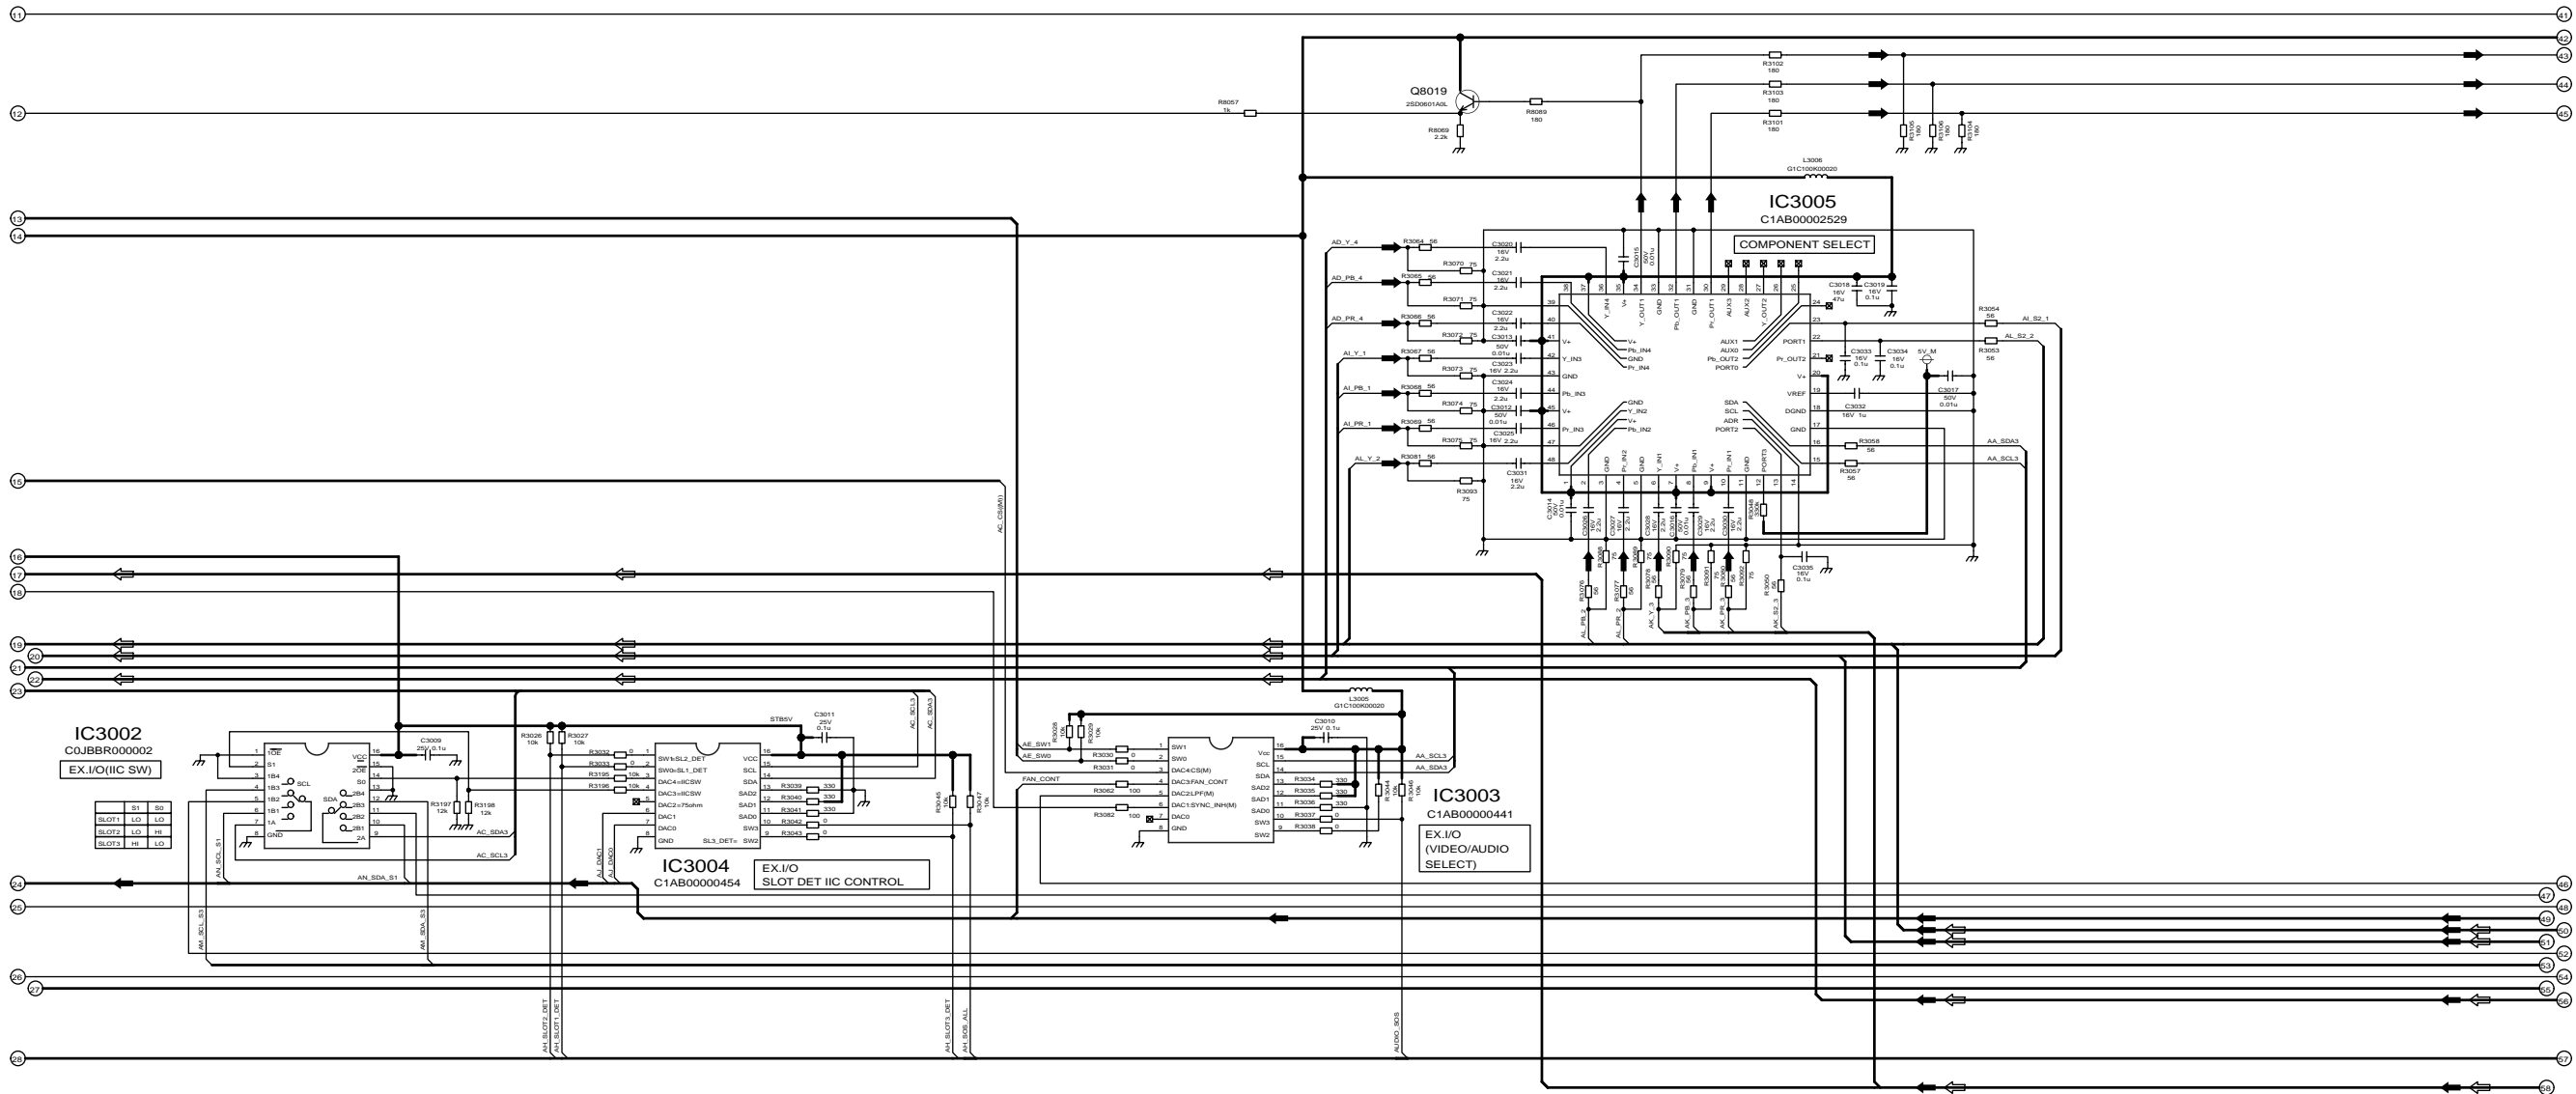


TH-37/42PR9U
J-Board (3 of 5) Schematic Diagram

TH-37/42PR9U
J-Board (3 of 5) Schematic Diagram

15.26. J-Board (4 of 5) Schematic Diagram


J-BOARD TNPA3896ABS (4/5)

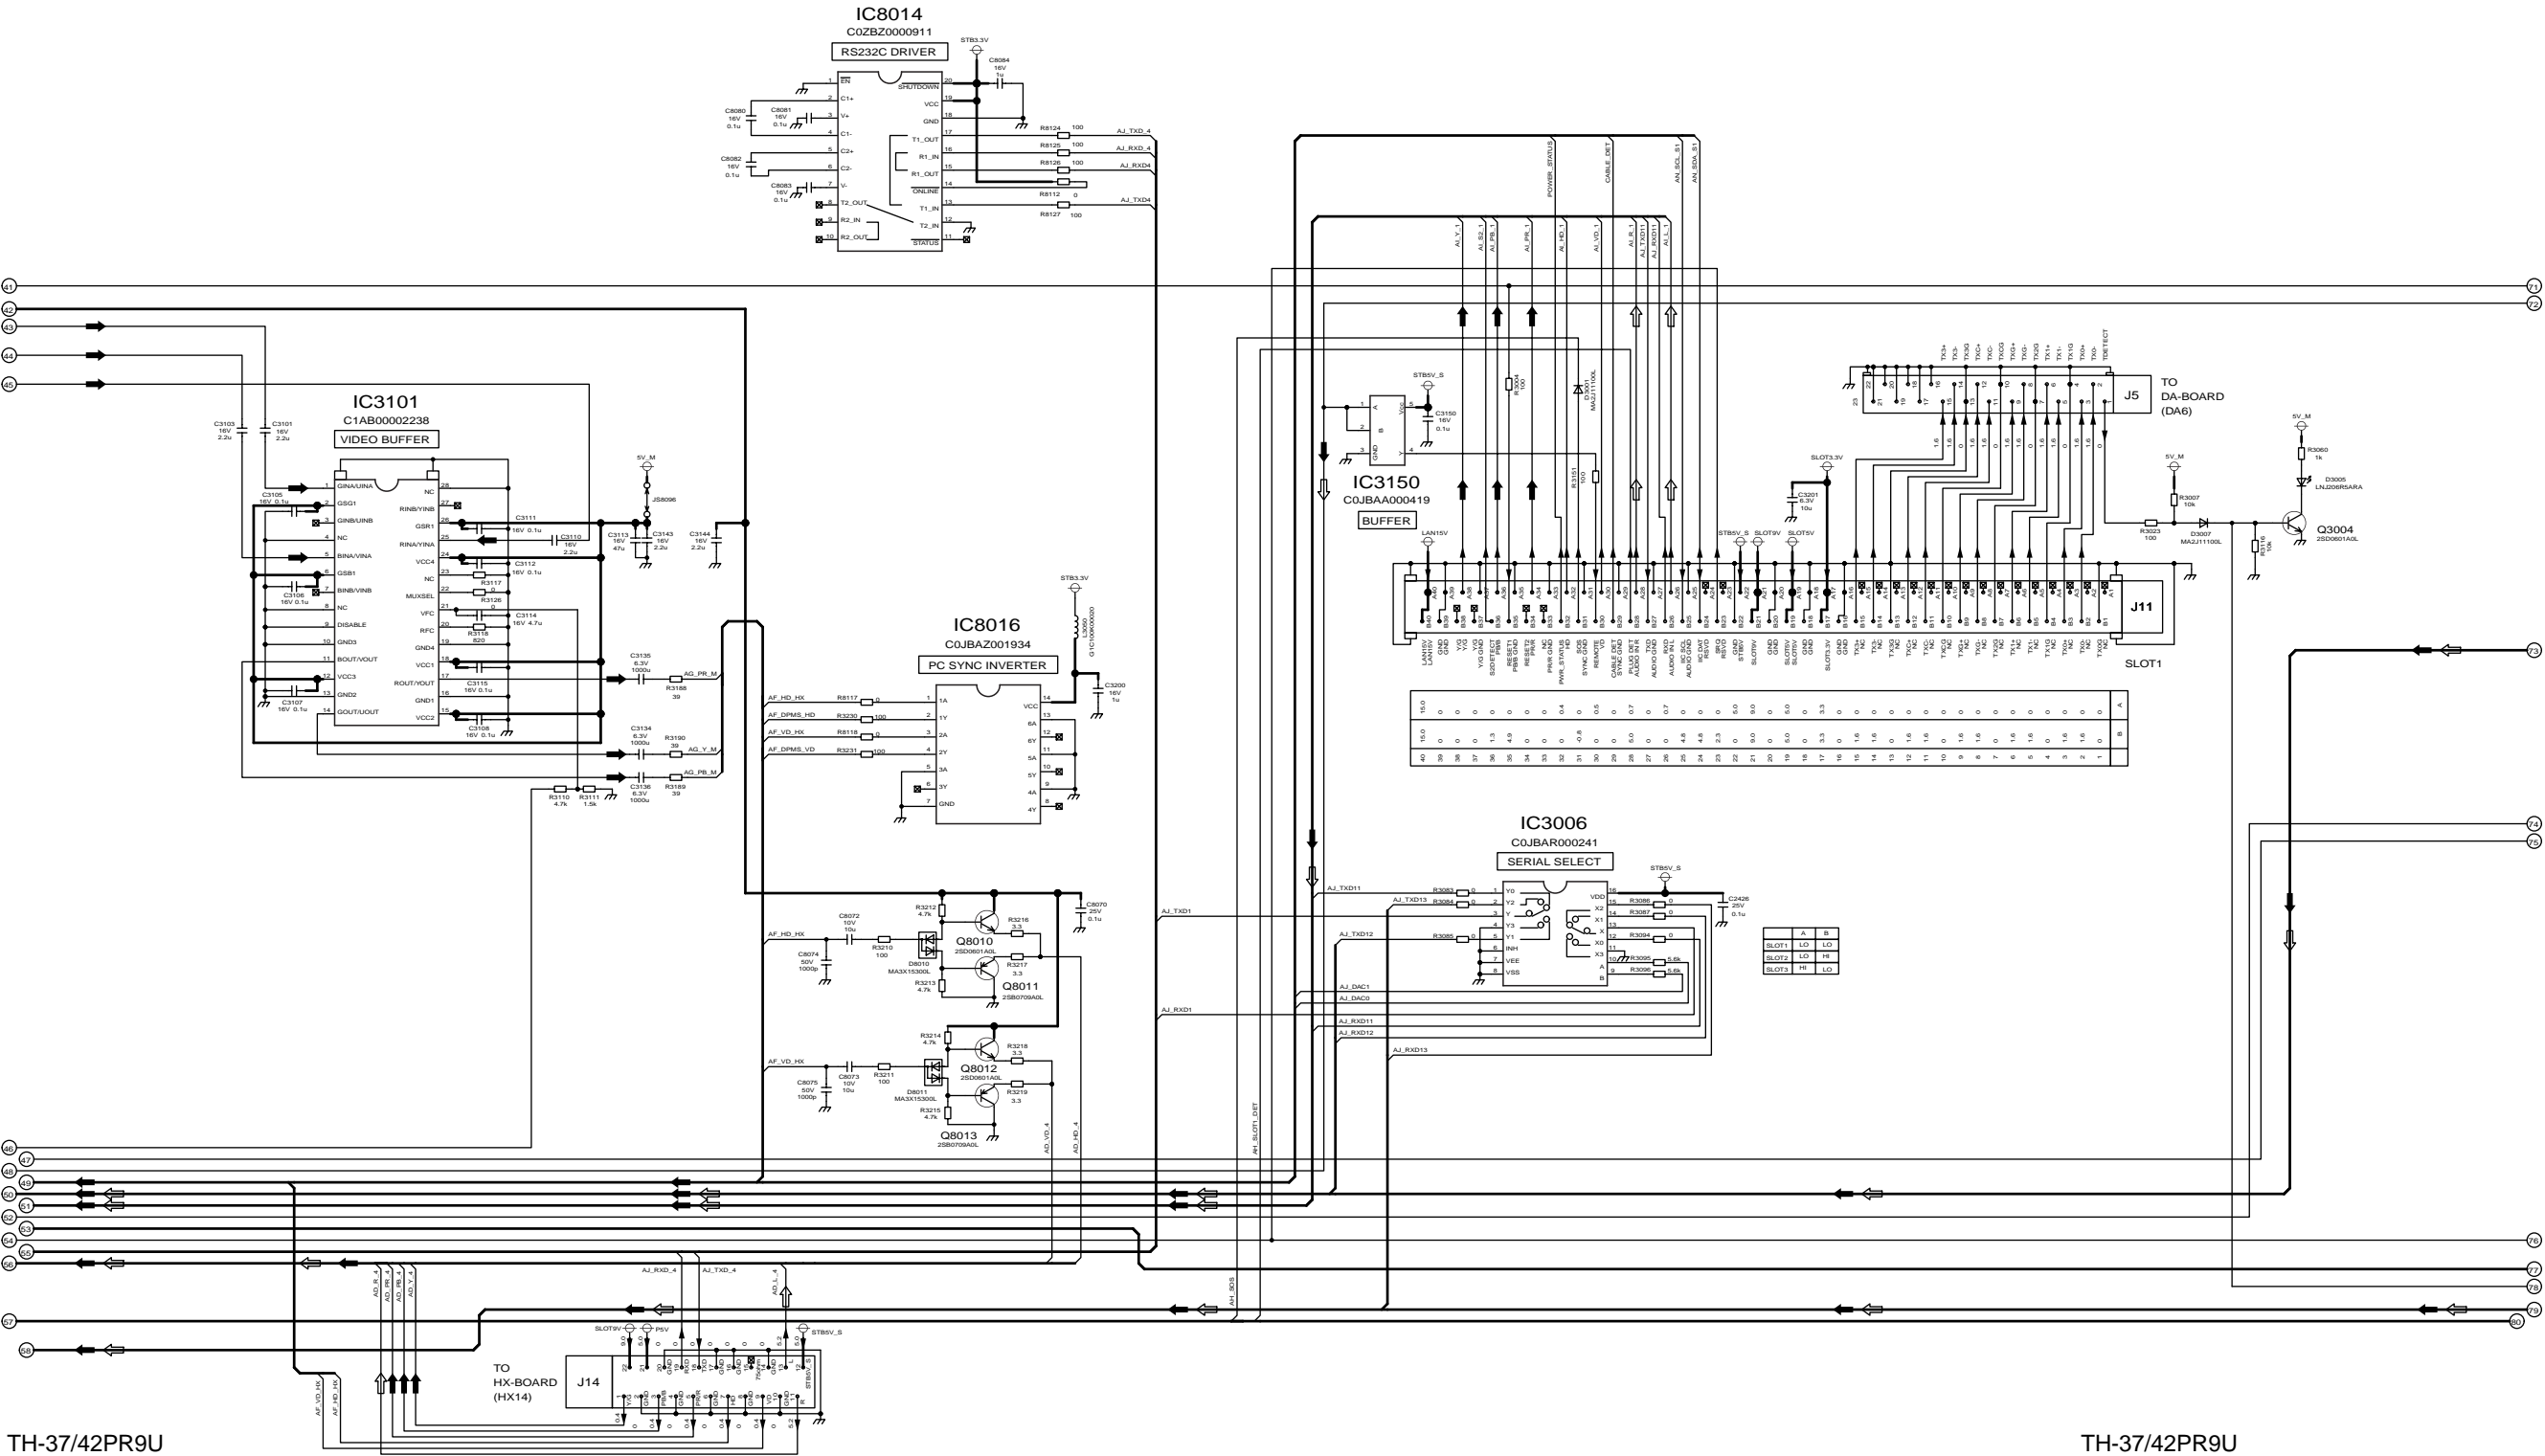


TH-37/42PR9U
J-Board (4 of 5) Schematic Diagram


TH-37/42PR9U
J-Board (4 of 5) Schematic Diagram


TH-37/42PR9U
J-Board (5 of 5) Schematic Diagram





15.29. DA-Board (2 of 2) Block Diagram

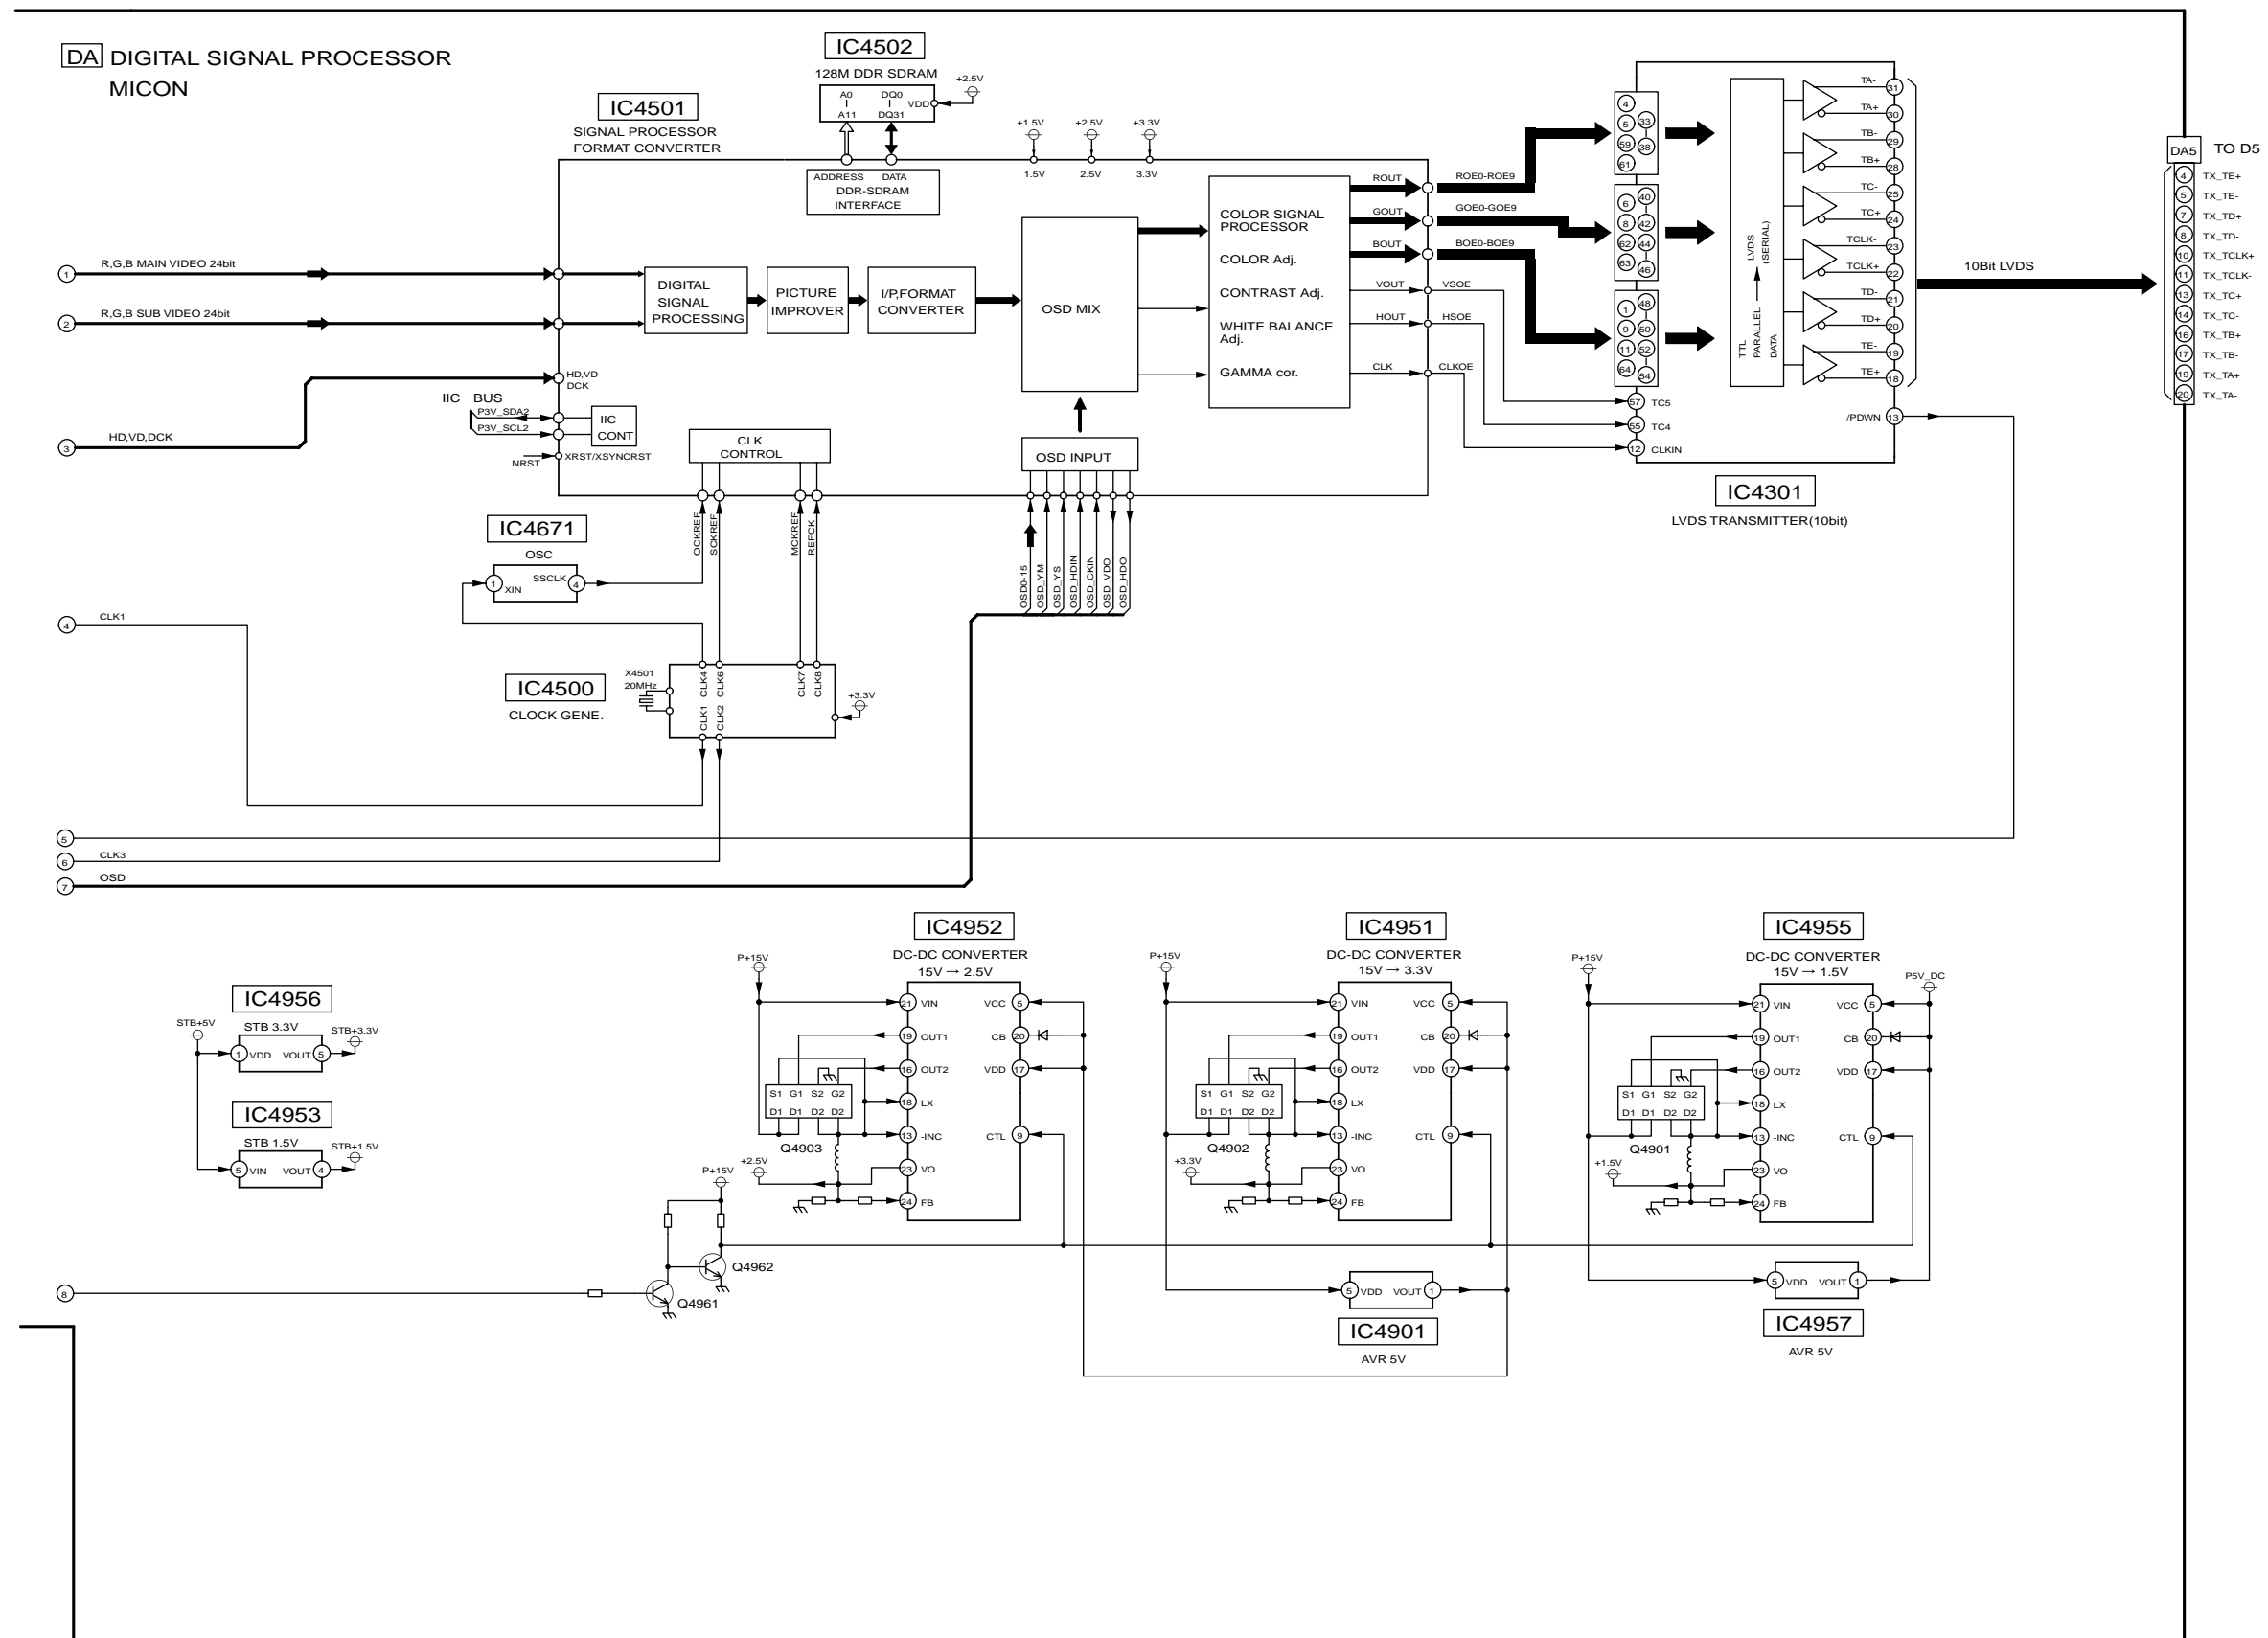












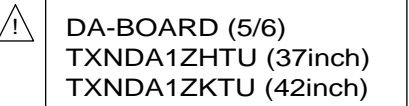






TH-37/42PR9U
DA-Board (6 of 6) Schematic Diagram
















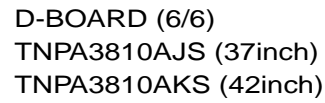


15.43. C1 and C2-Board Block Diagram

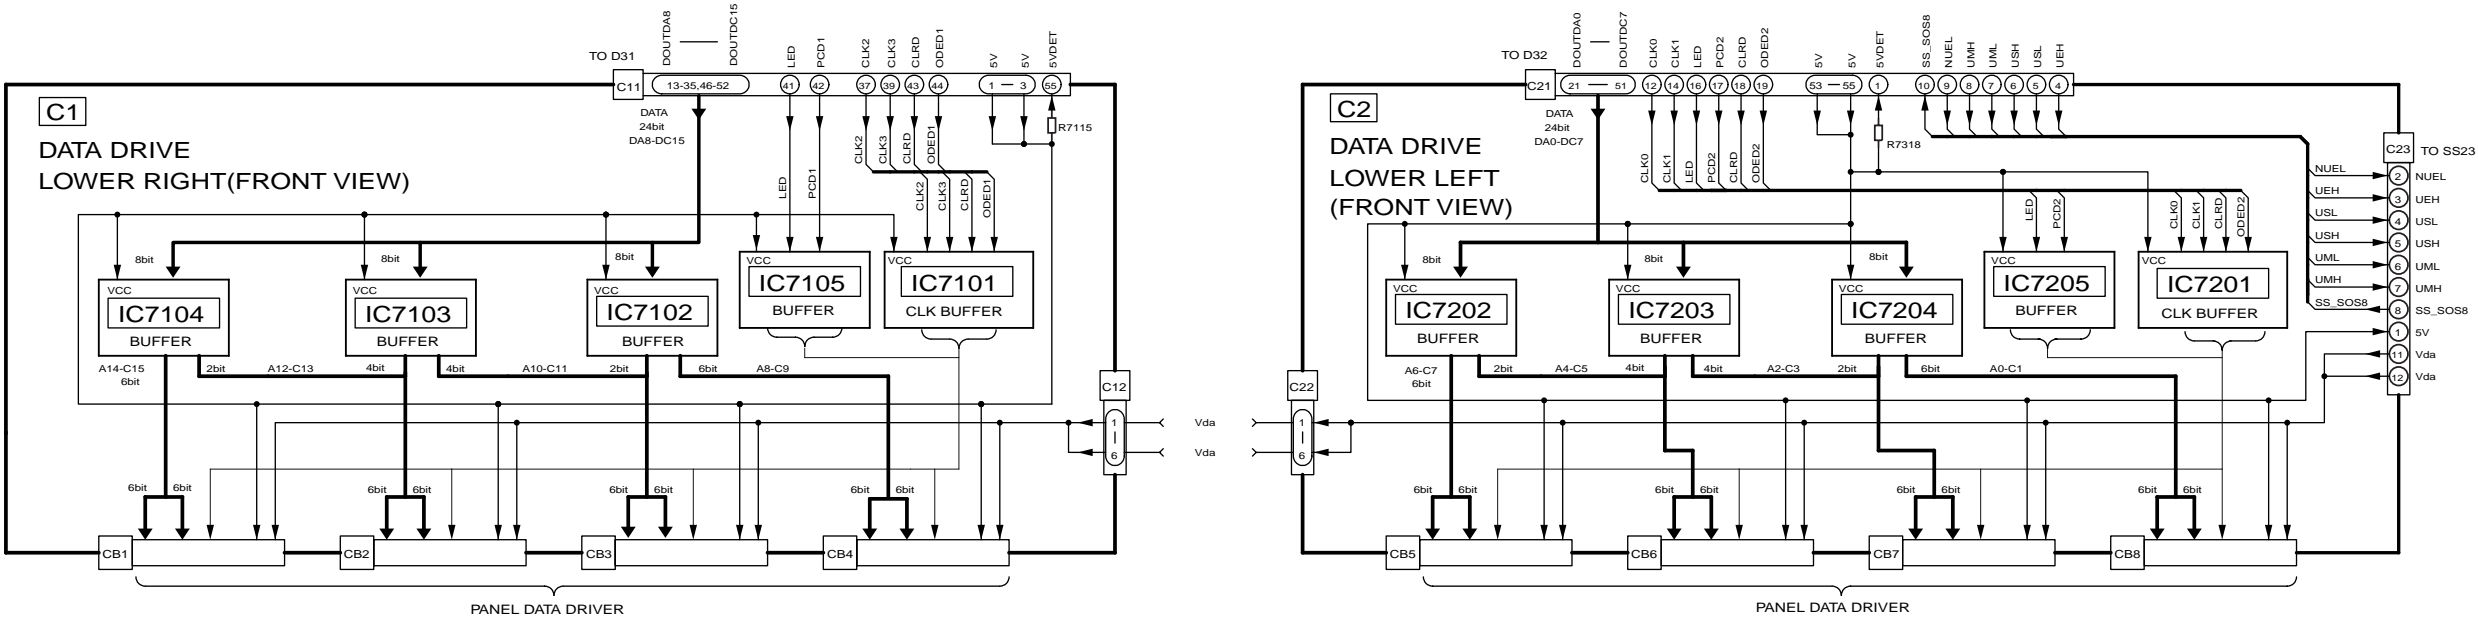




15.45. C1-Board (2 of 2) Schematic Diagram (37inch)

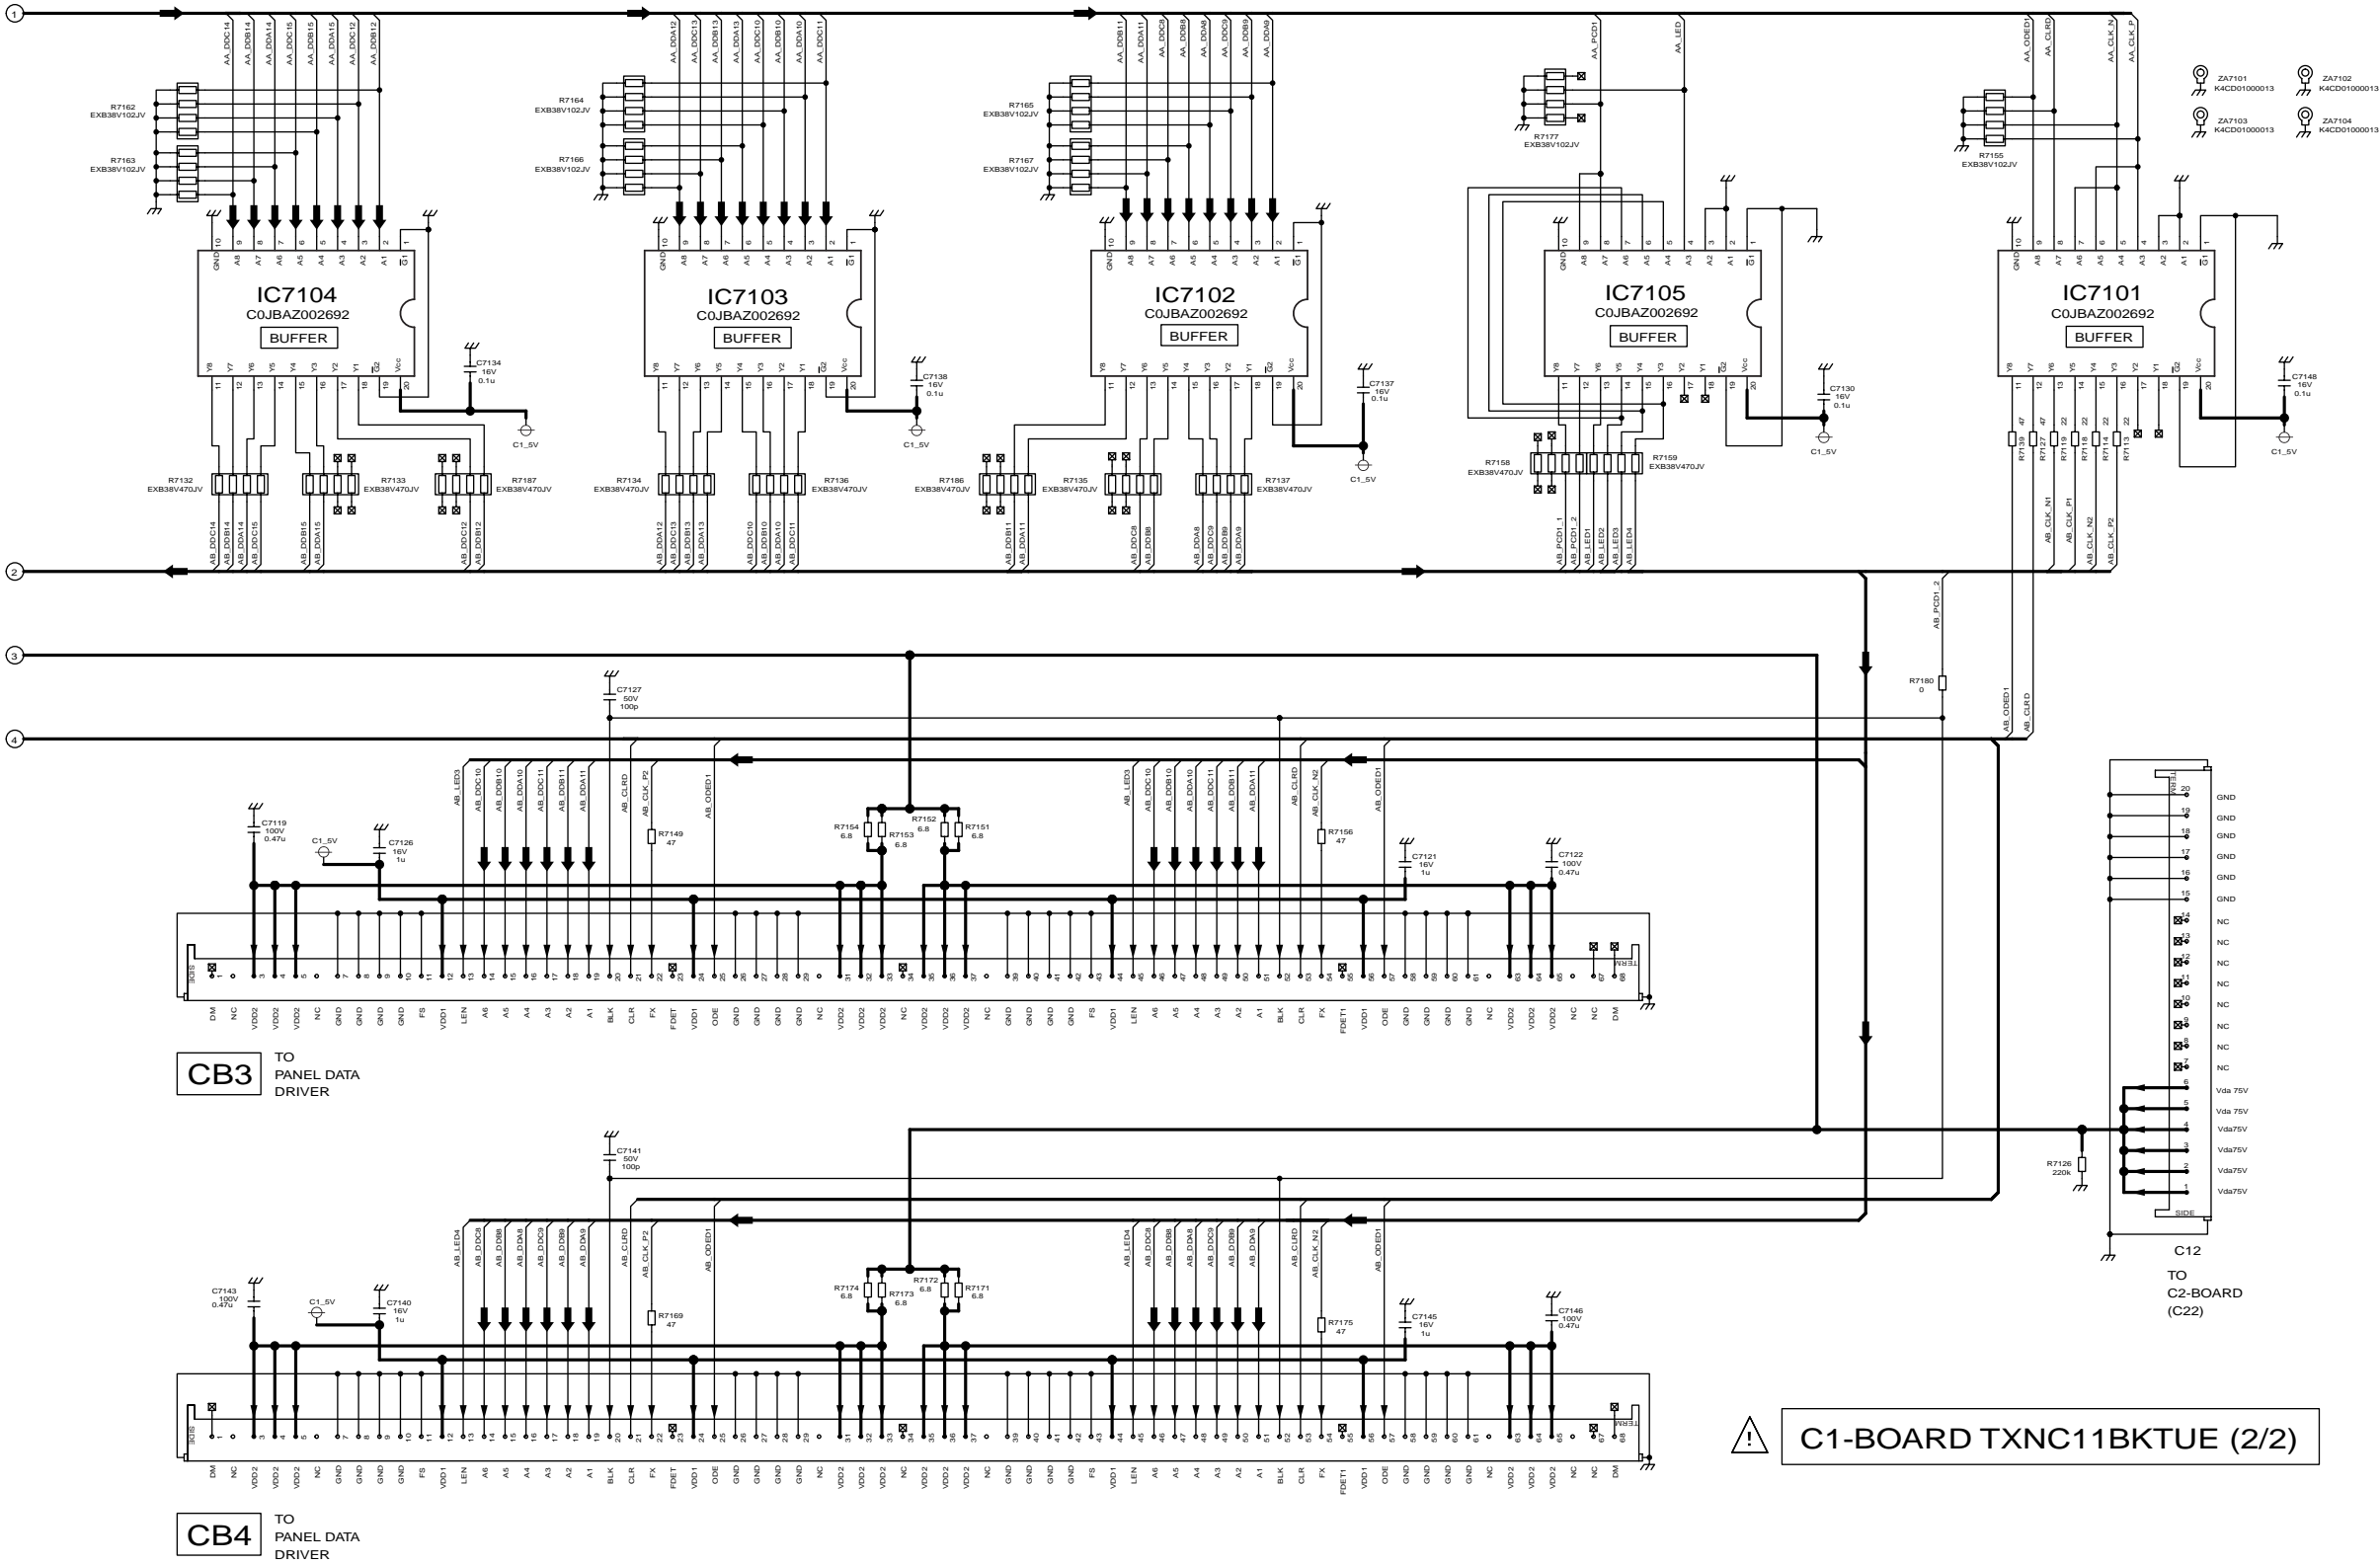


TH-37PR9U
C1-Board (2 of 2) Schematic Diagram

TH-37PR9U
C1-Board (2 of 2) Schematic Diagram












TH-37PR9U C2-Board (2 of 2) Schematic Diagram






15.52. SC, SU and SD-Board Block Diagram (37inch)

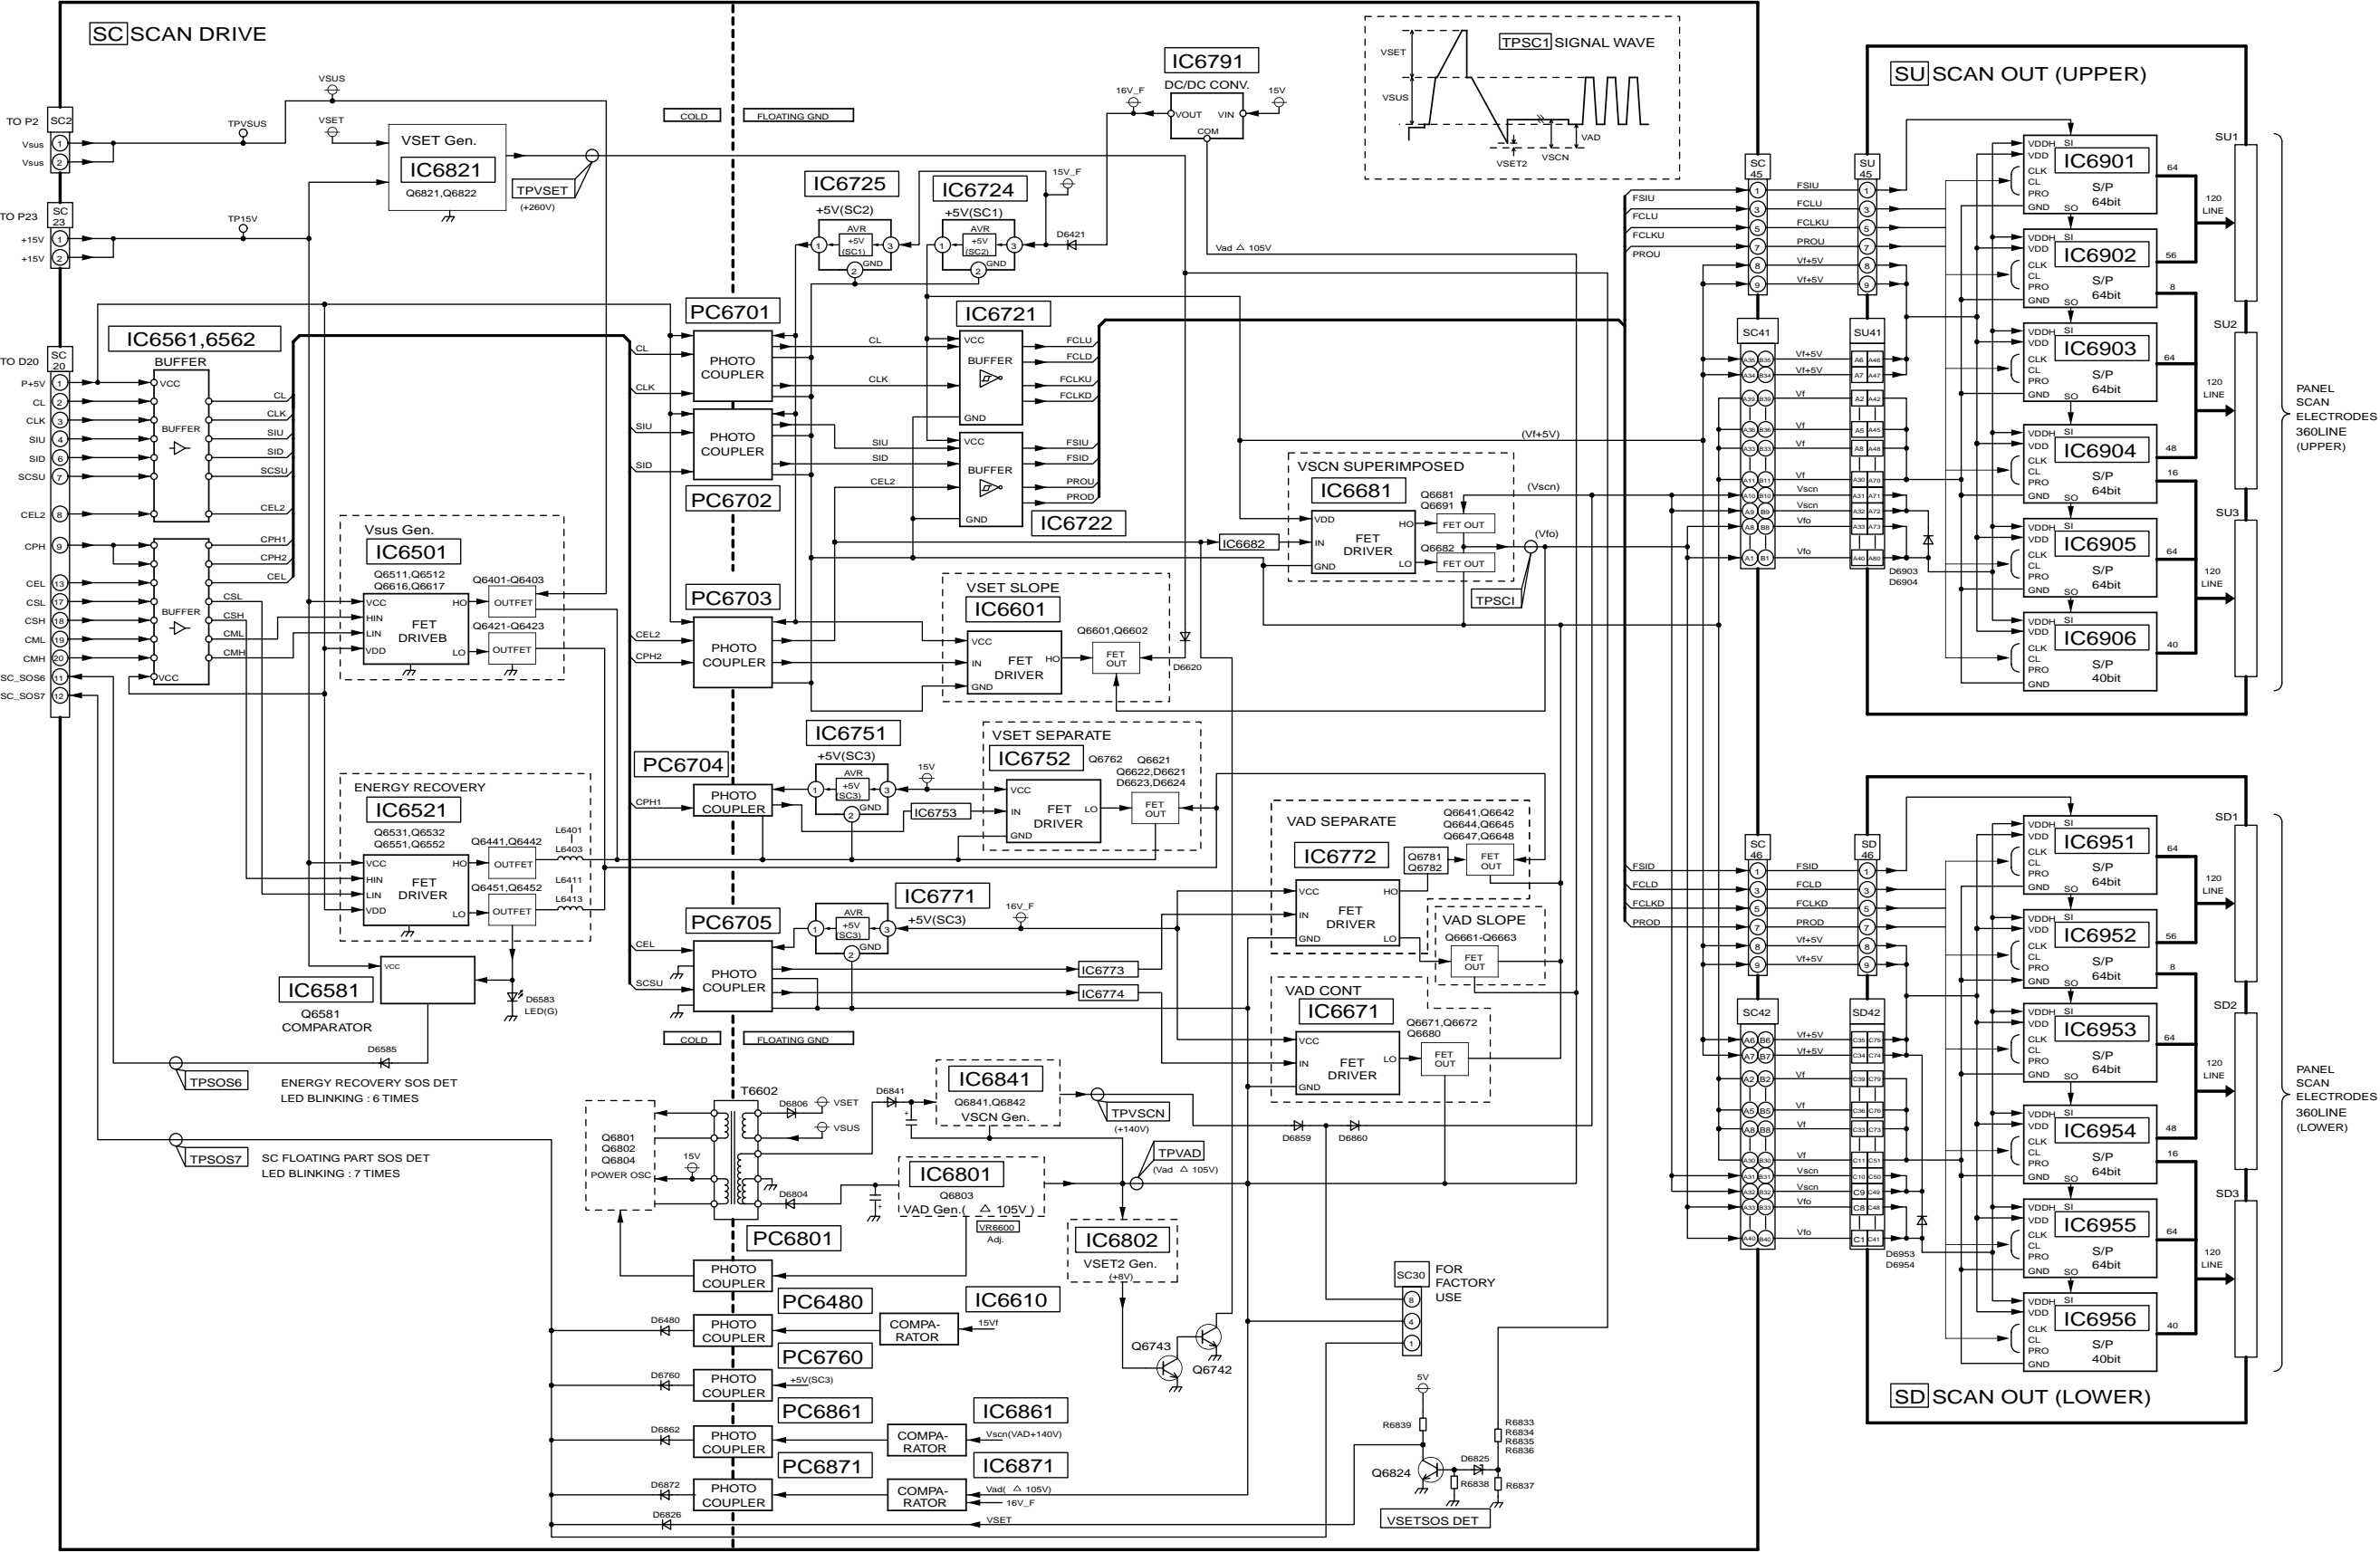


TH-37PR9U
SC, SU and SD-Board Block Diagram

TH-37PR9U
SC, SU and SD-Board Block Diagram


15.53. SC, SU and SD-Board Block Diagram (42inch)

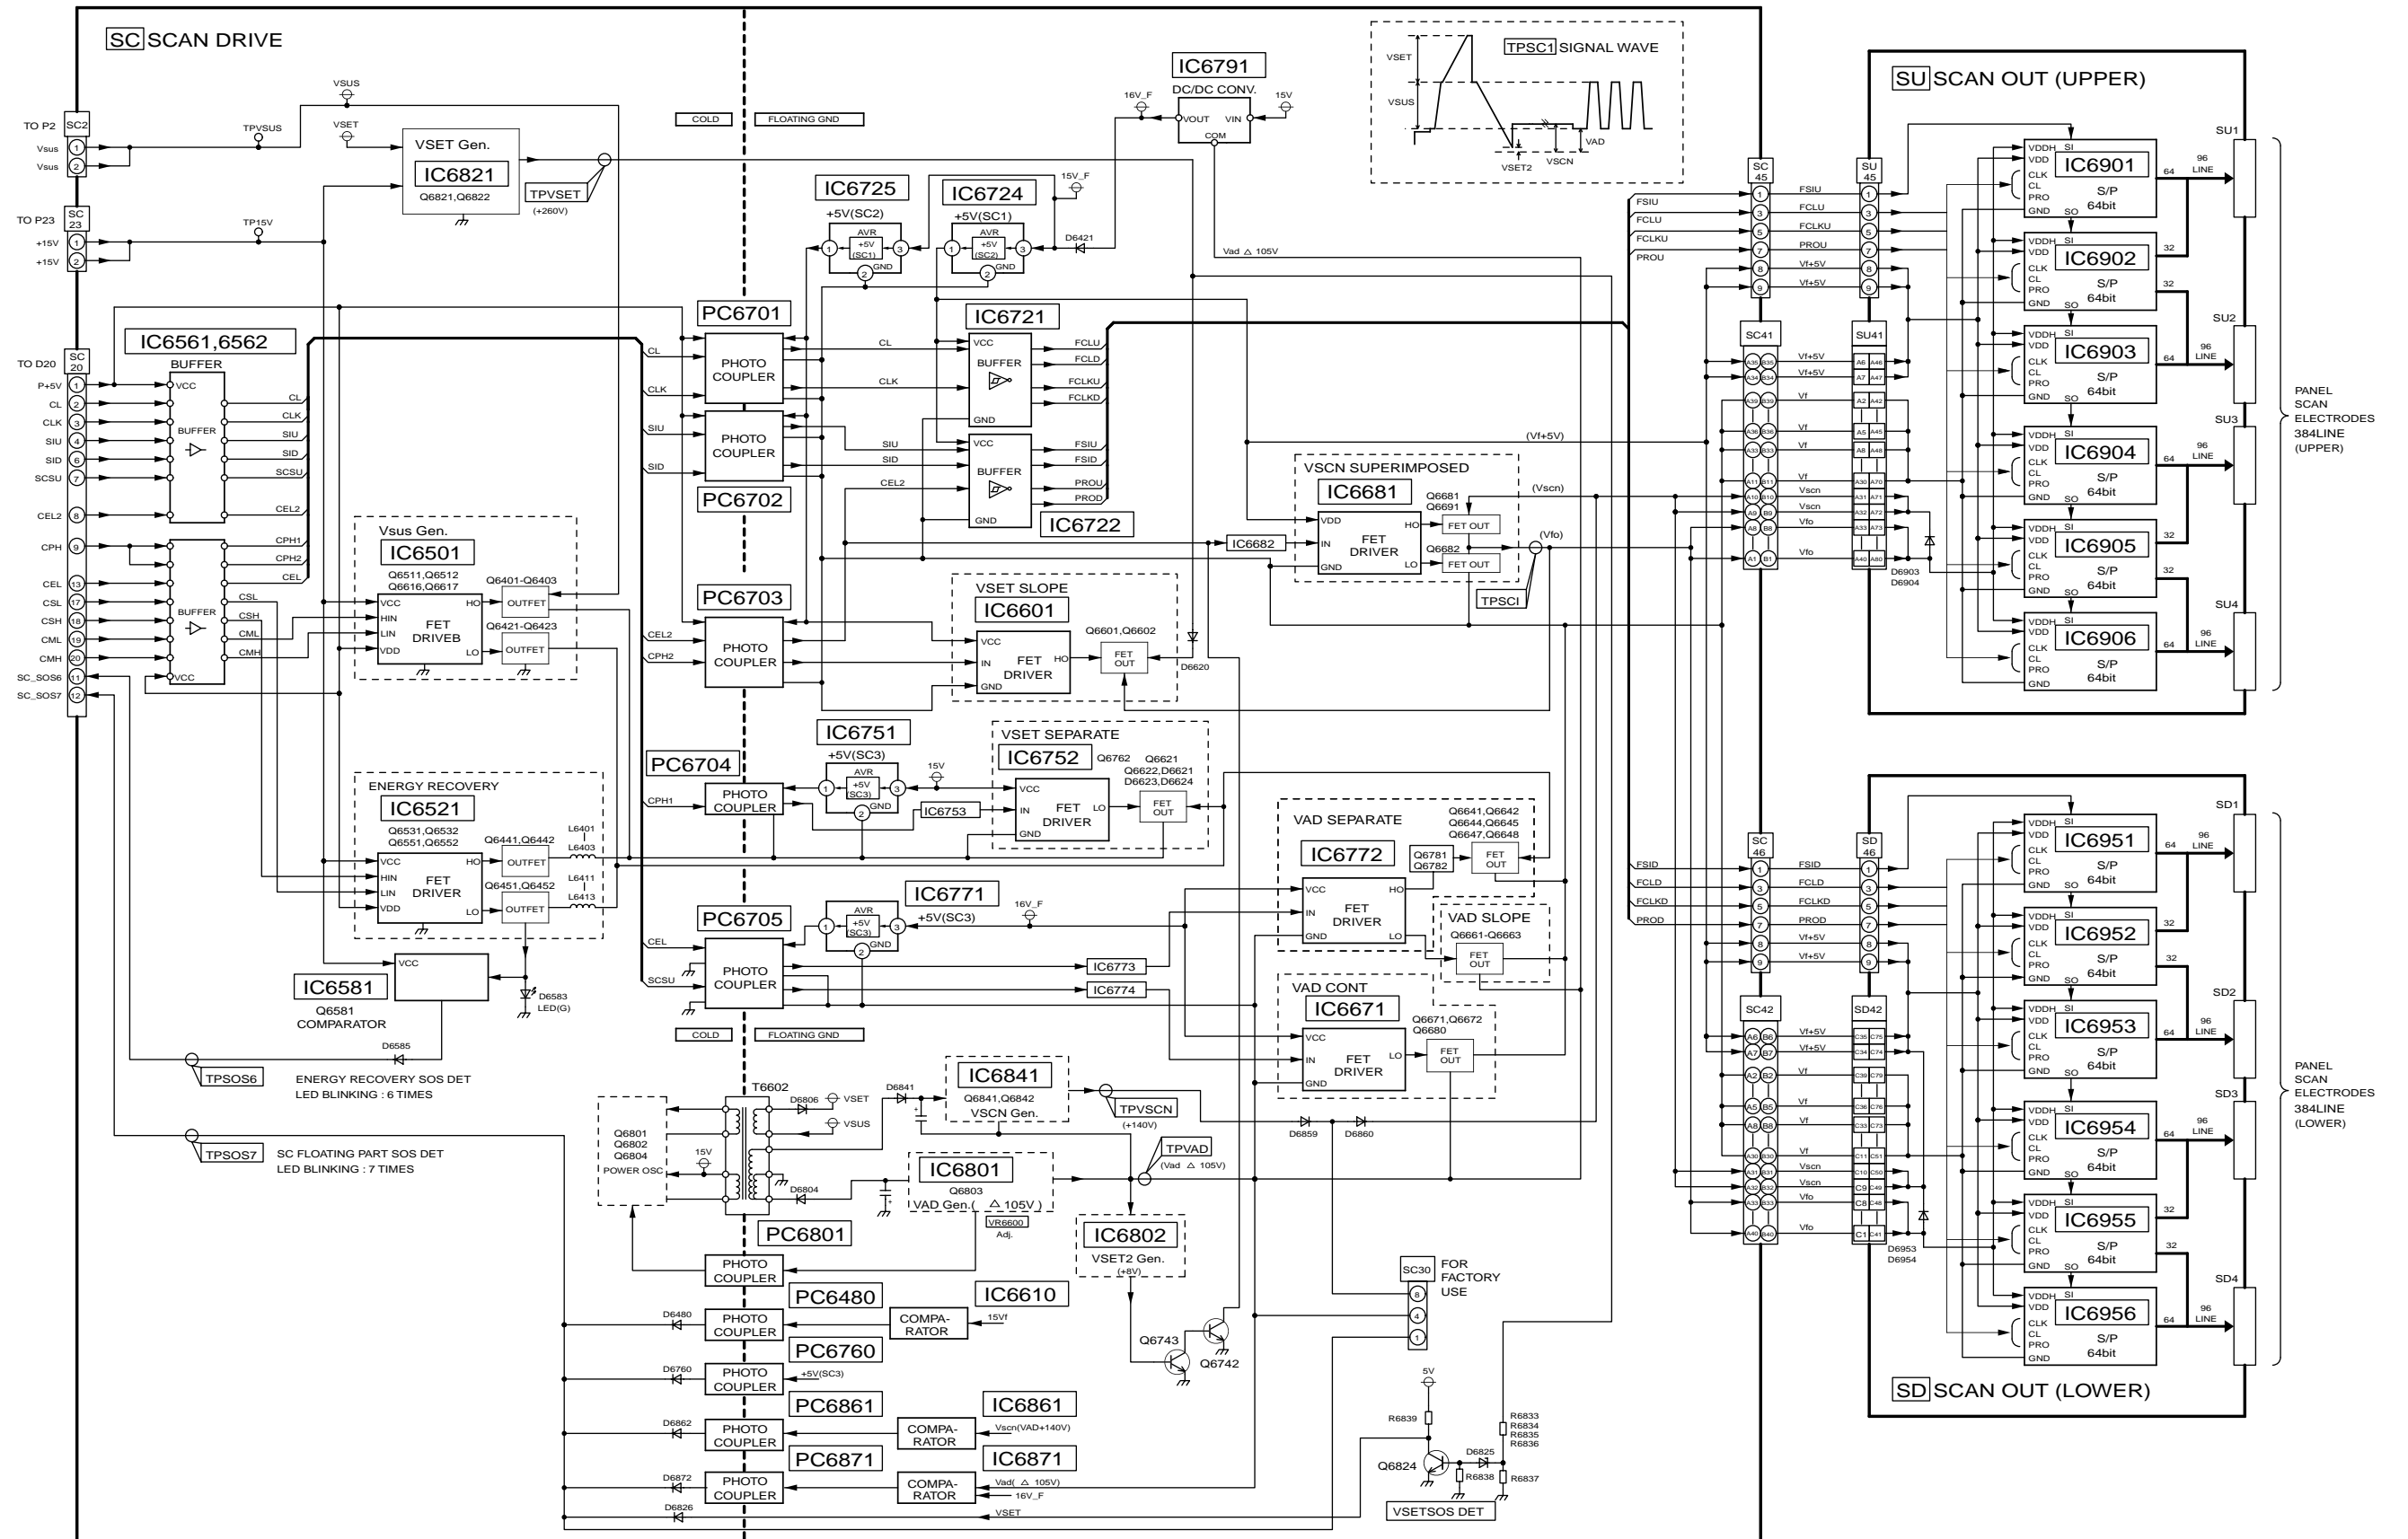


15.54. SC-Board (1 of 2) Schematic Diagram

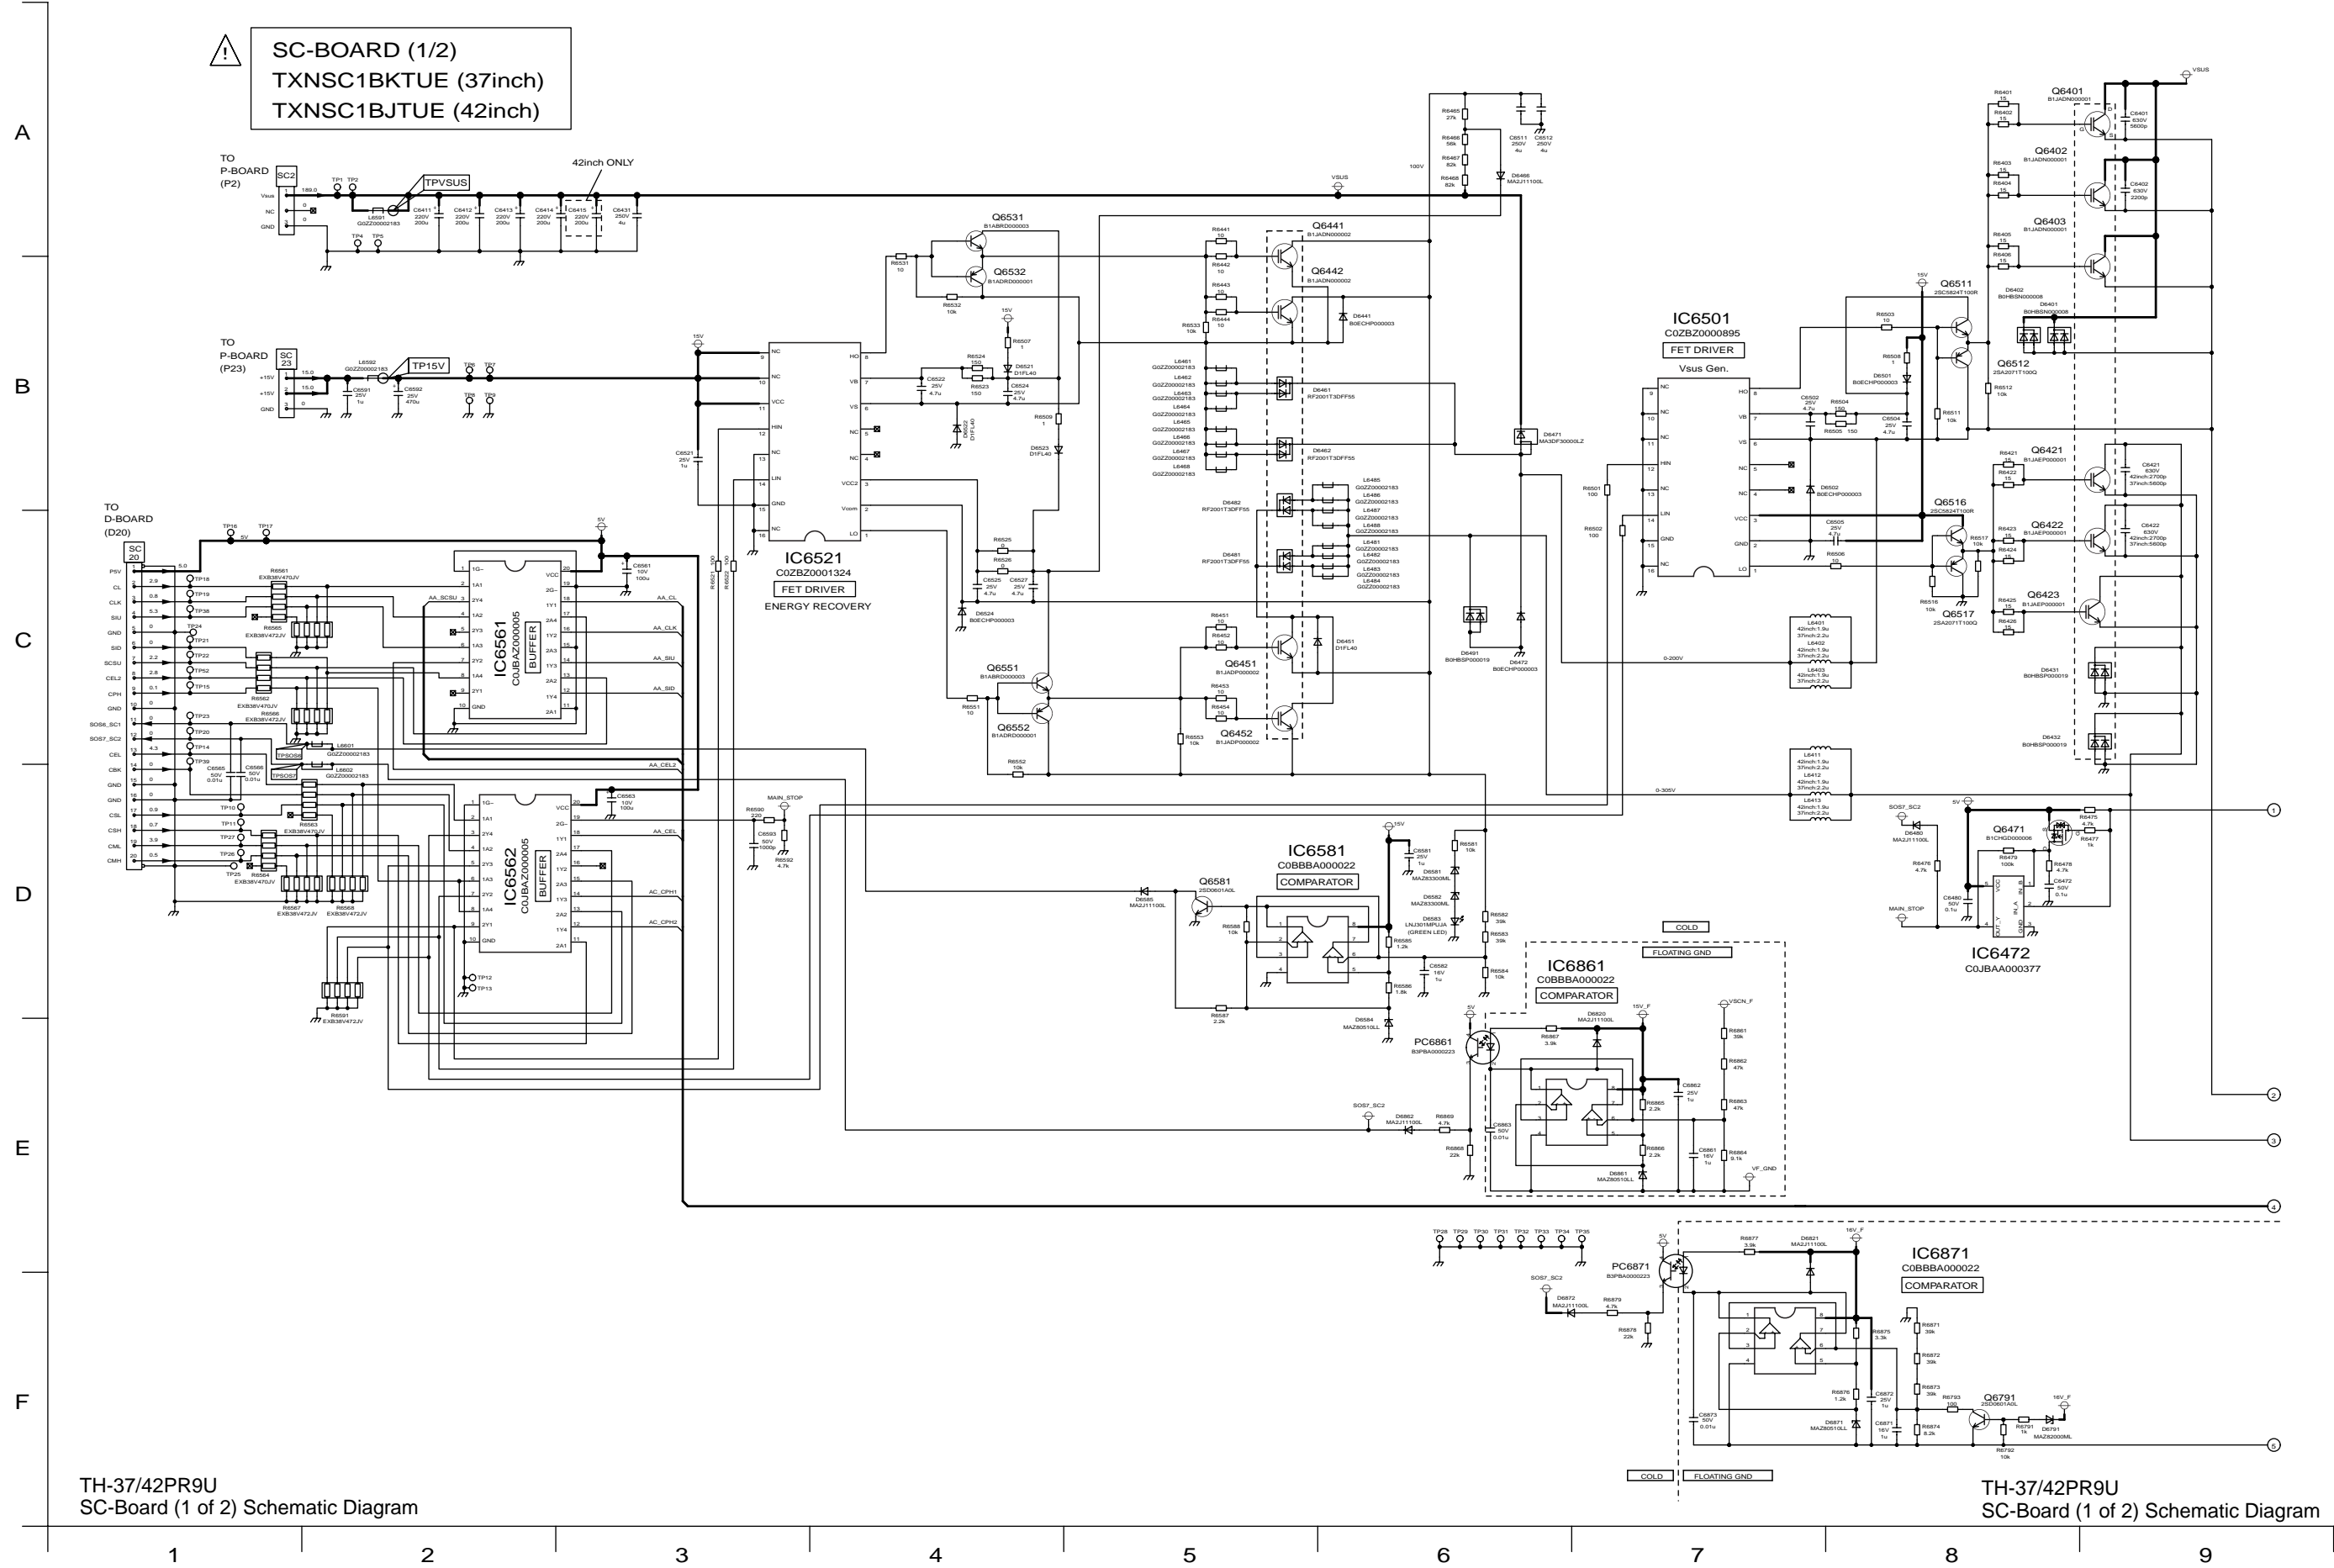


15.56. SU-Board (1 of 2) Schematic Diagram (37inch)

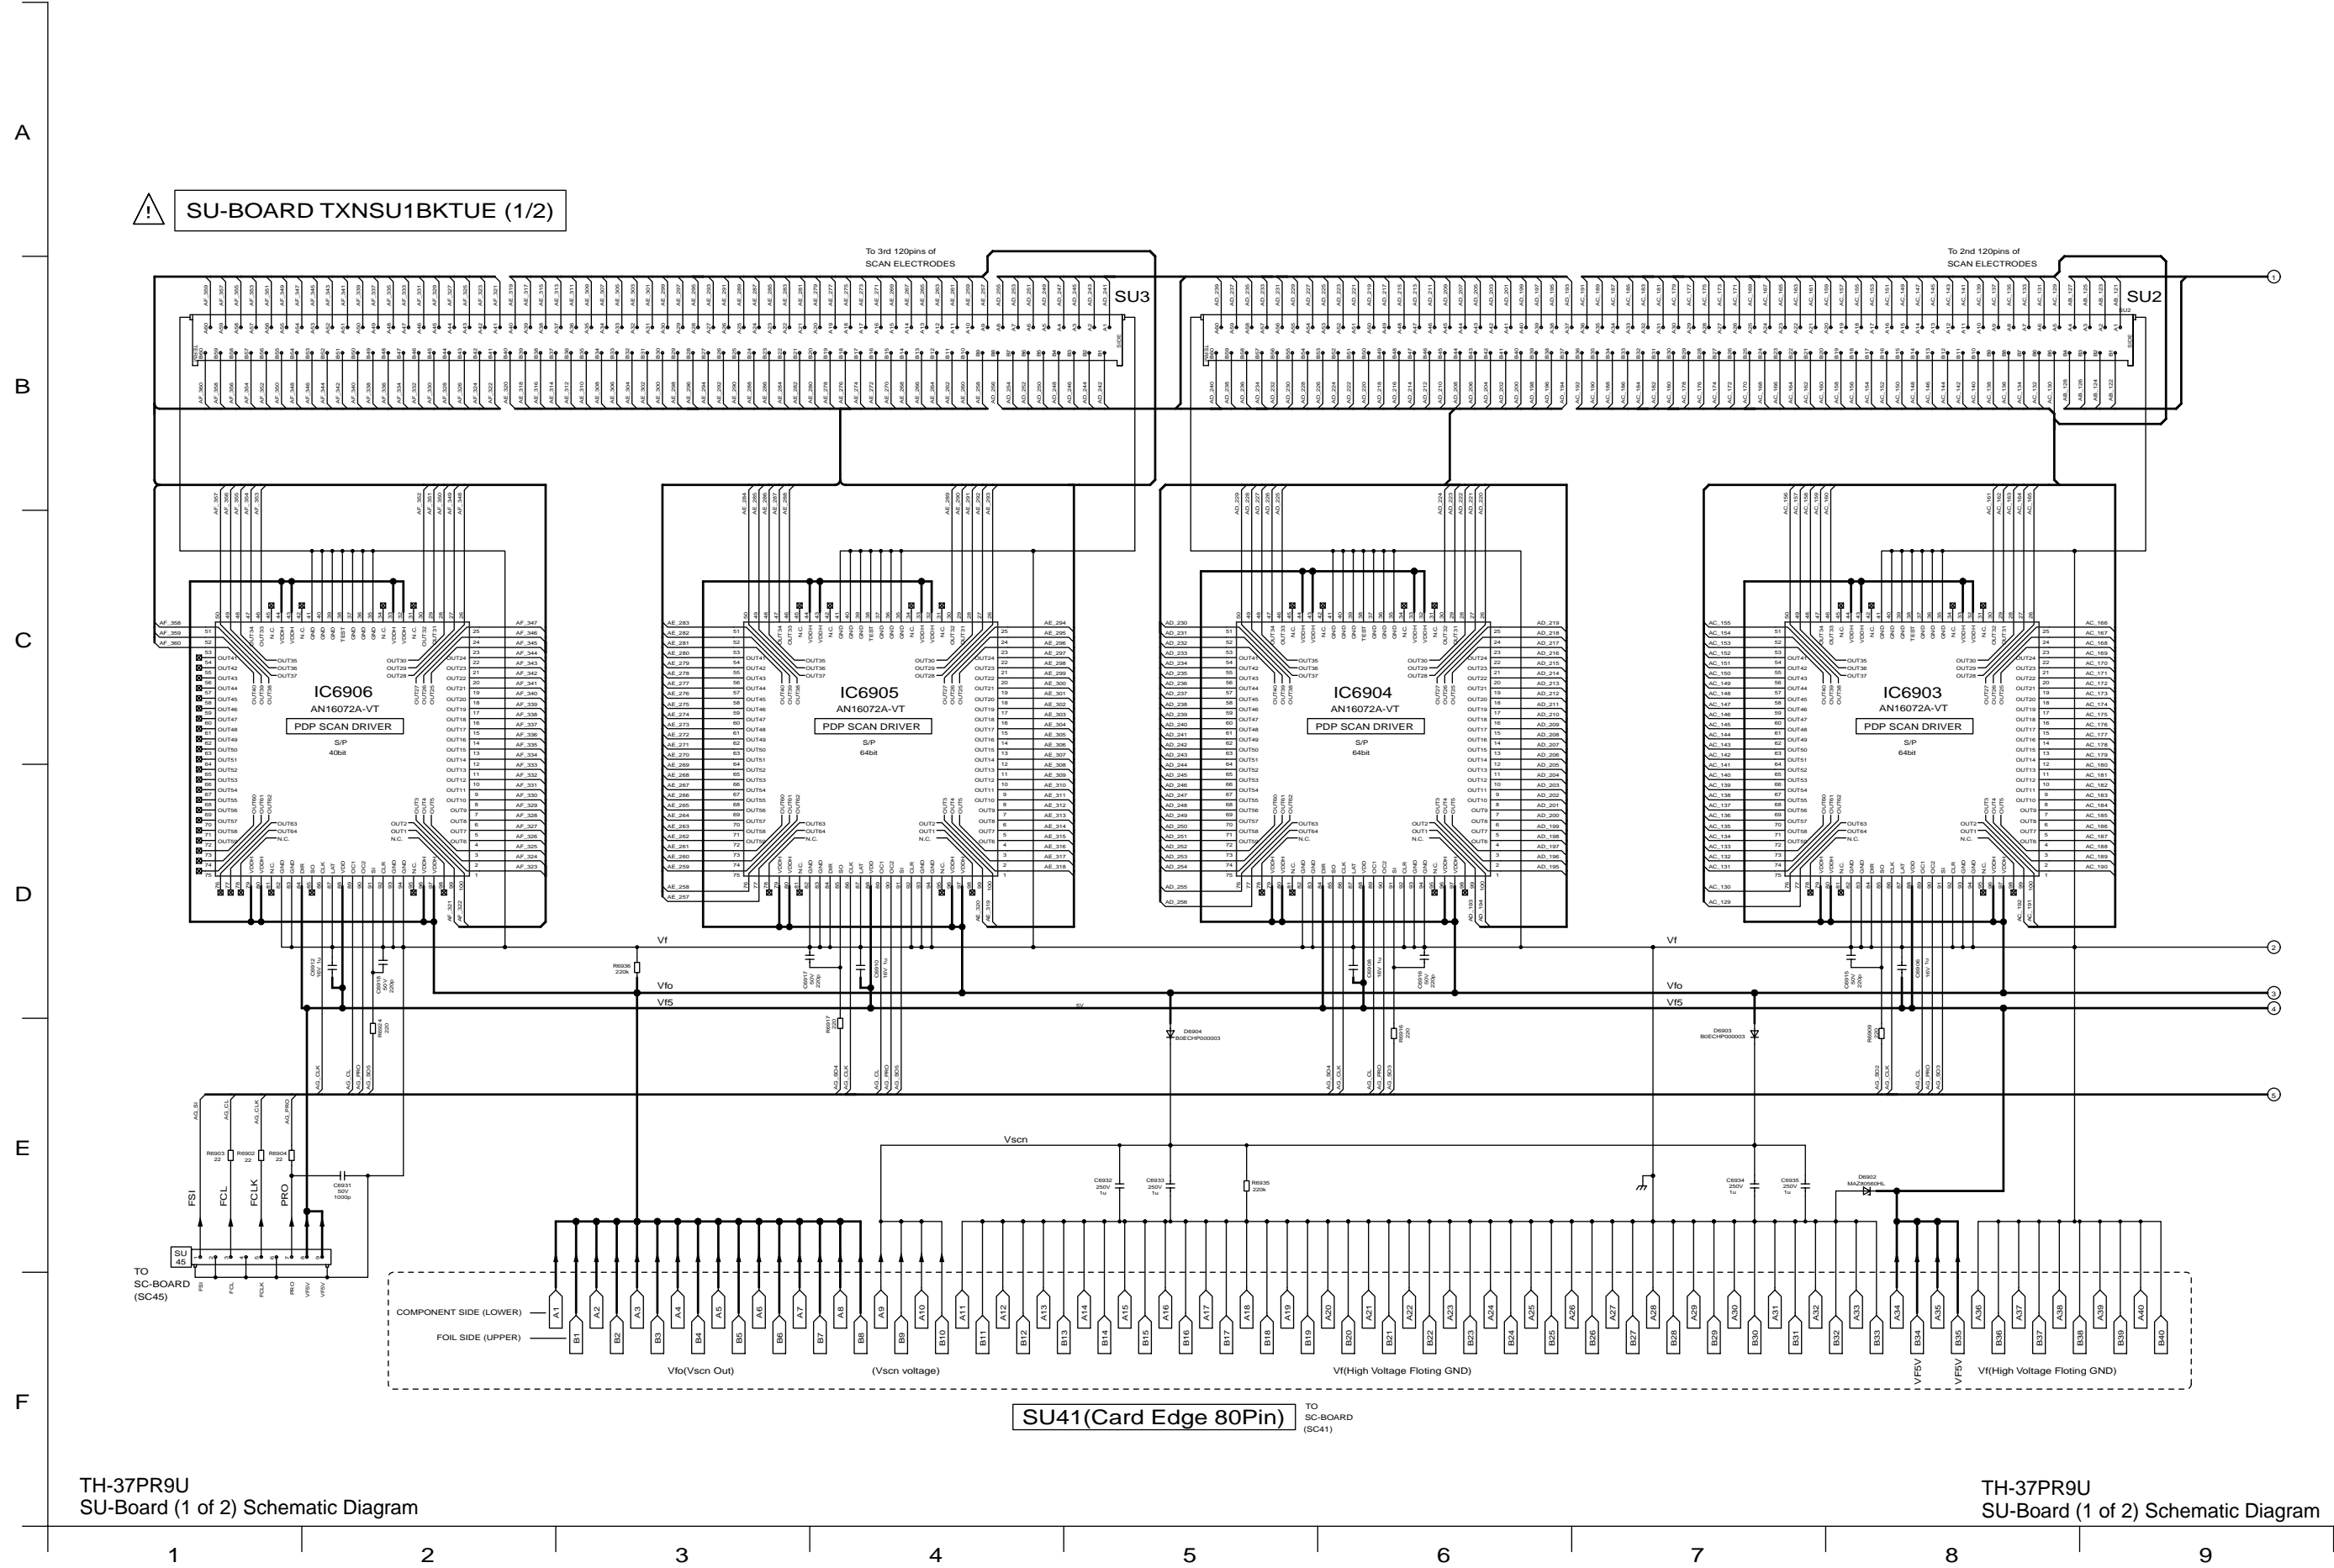



15.57. SU-Board (2 of 2) Schematic Diagram (37inch)

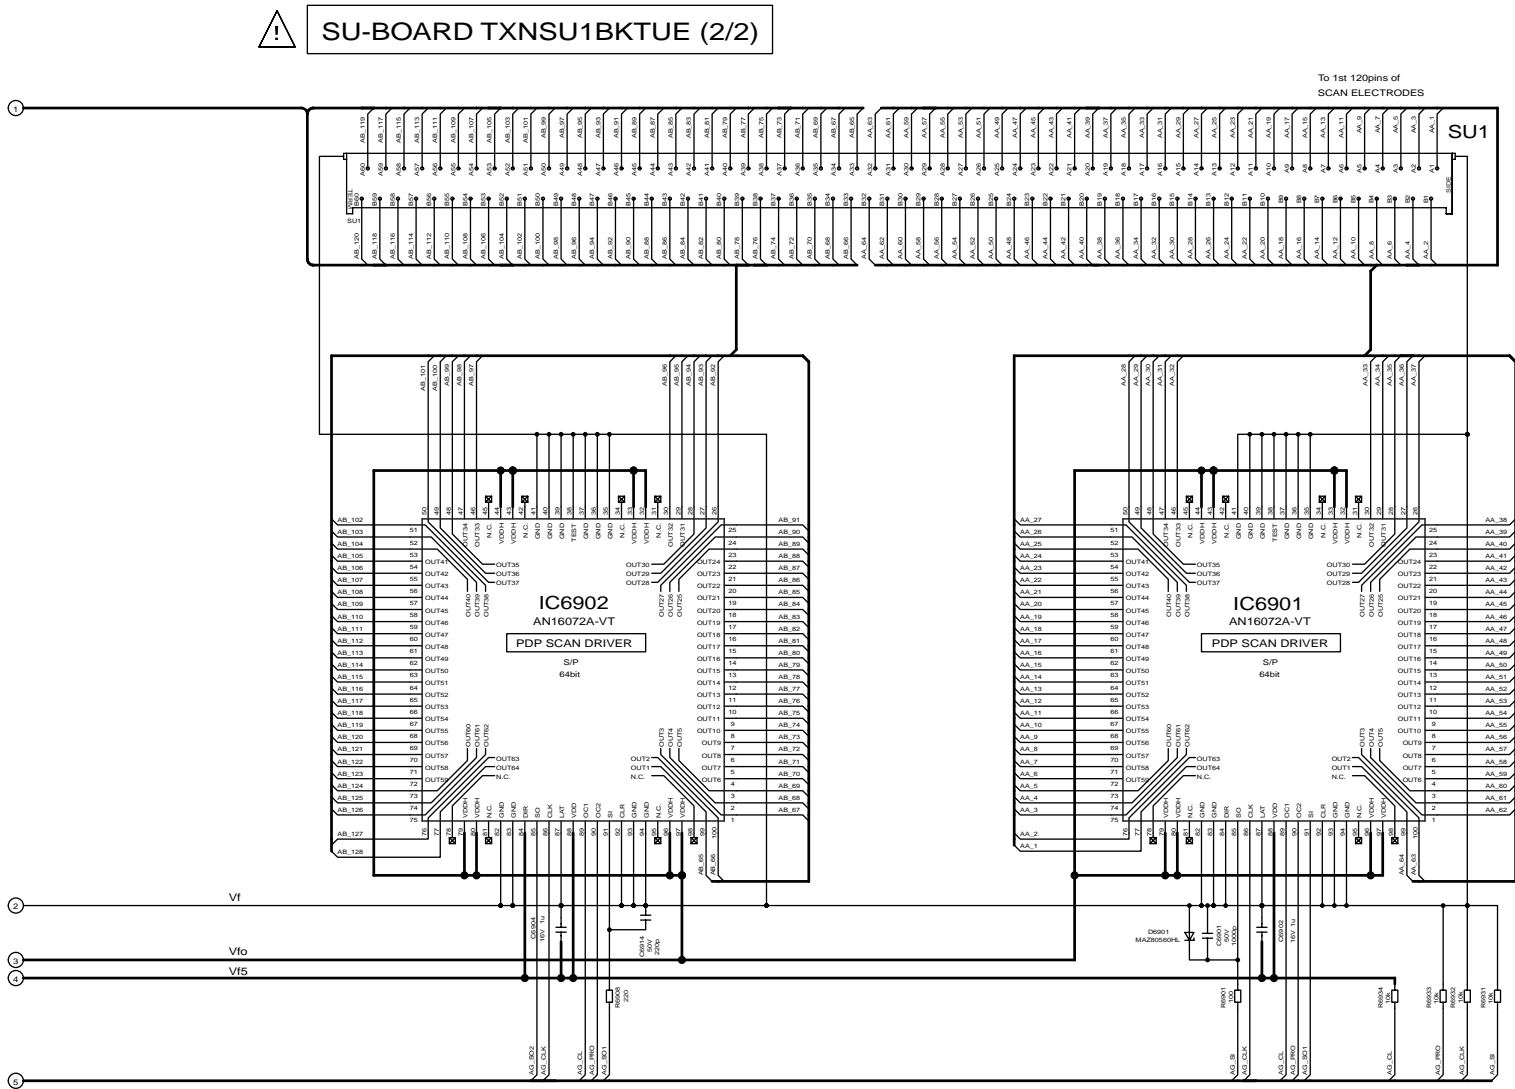


15.58. SU-Board (1 of 2) Schematic Diagram (42inch)

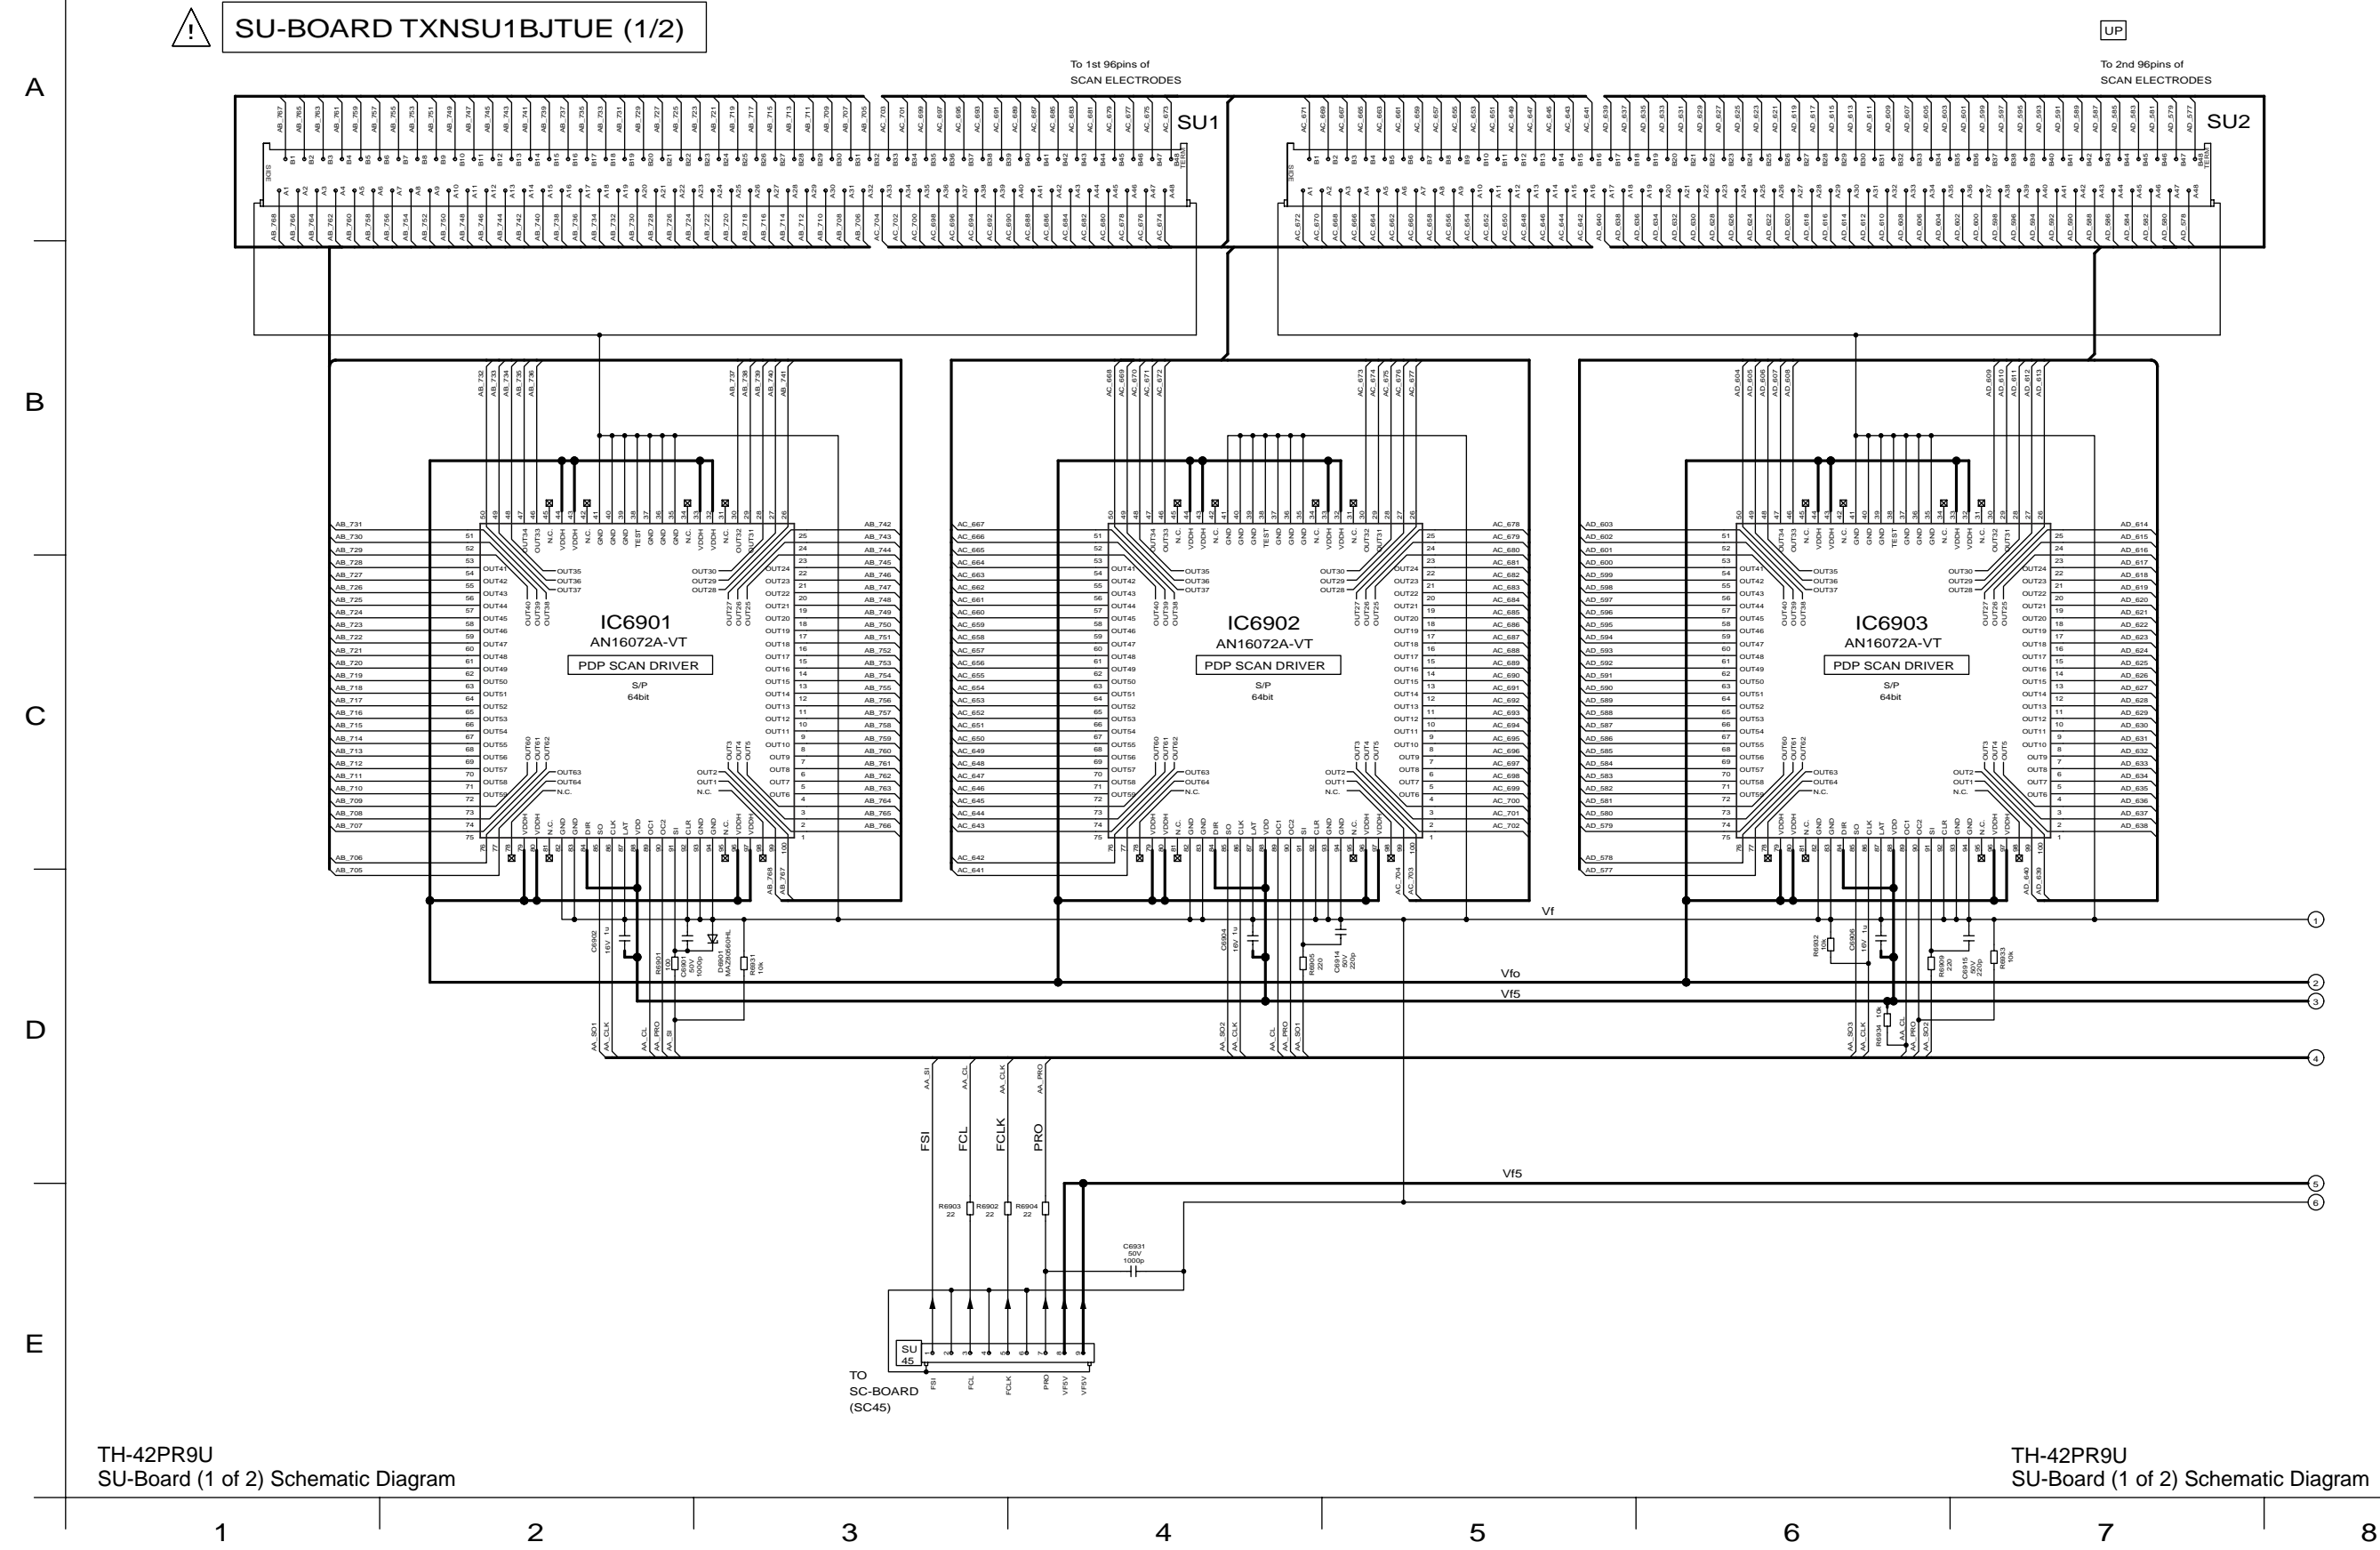







15.61. SD-Board (2 of 2) Schematic Diagram (37inch)

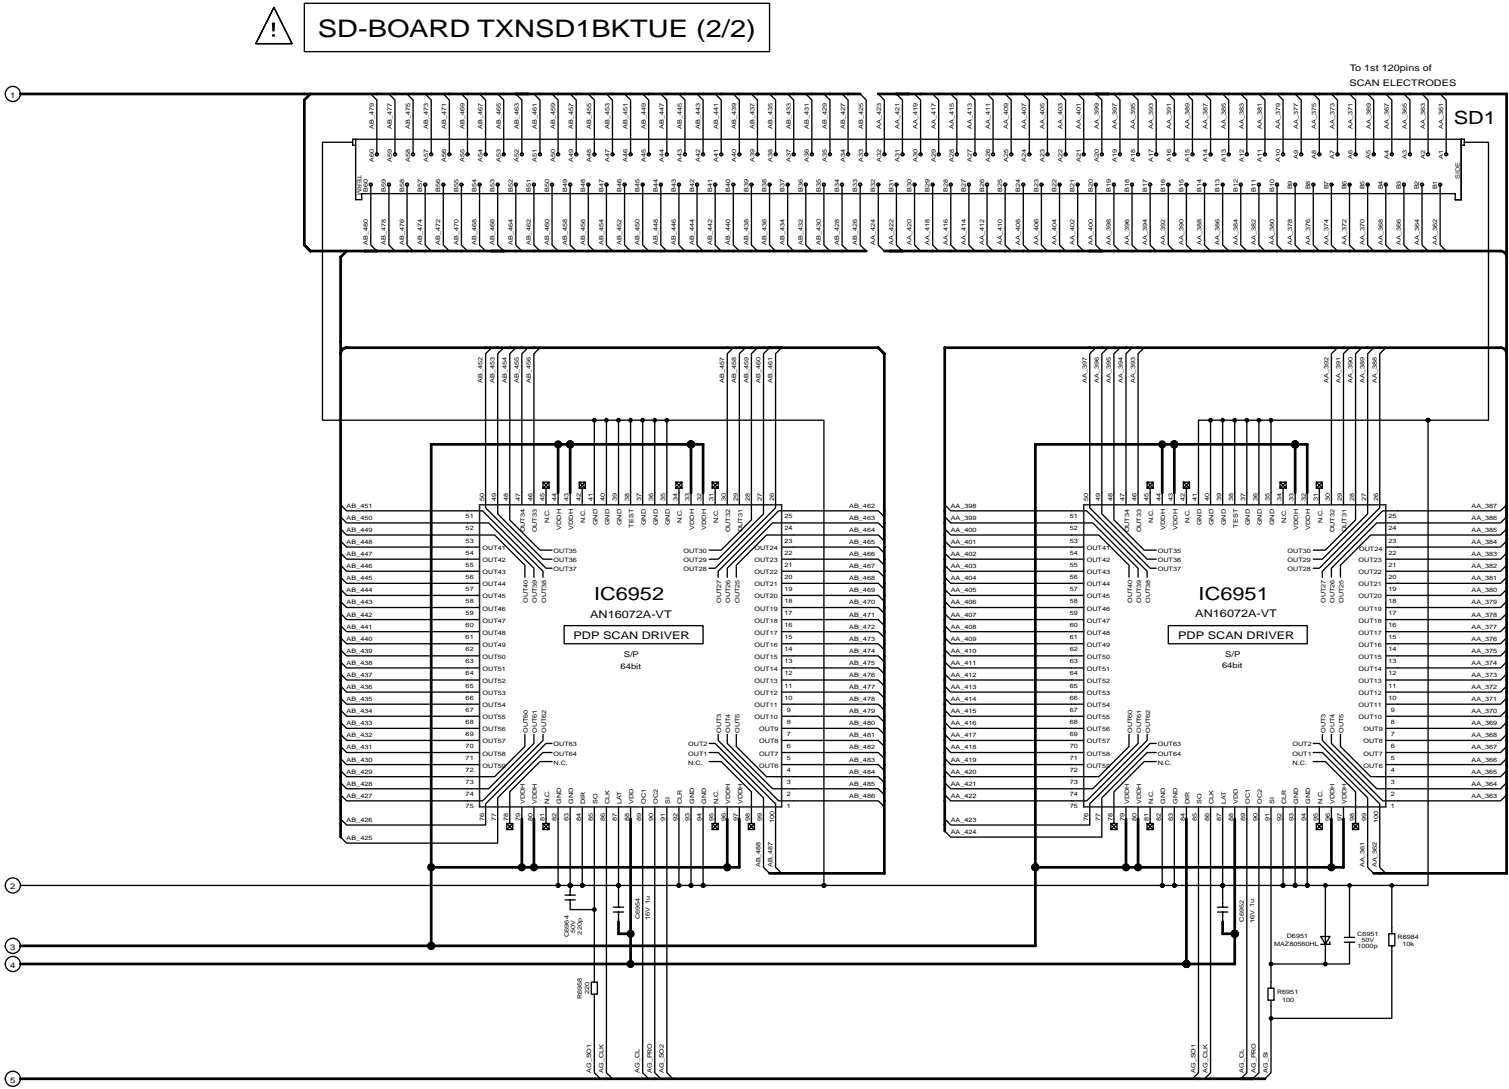





15.63. SD-Board (2 of 2) Schematic Diagram (42inch)

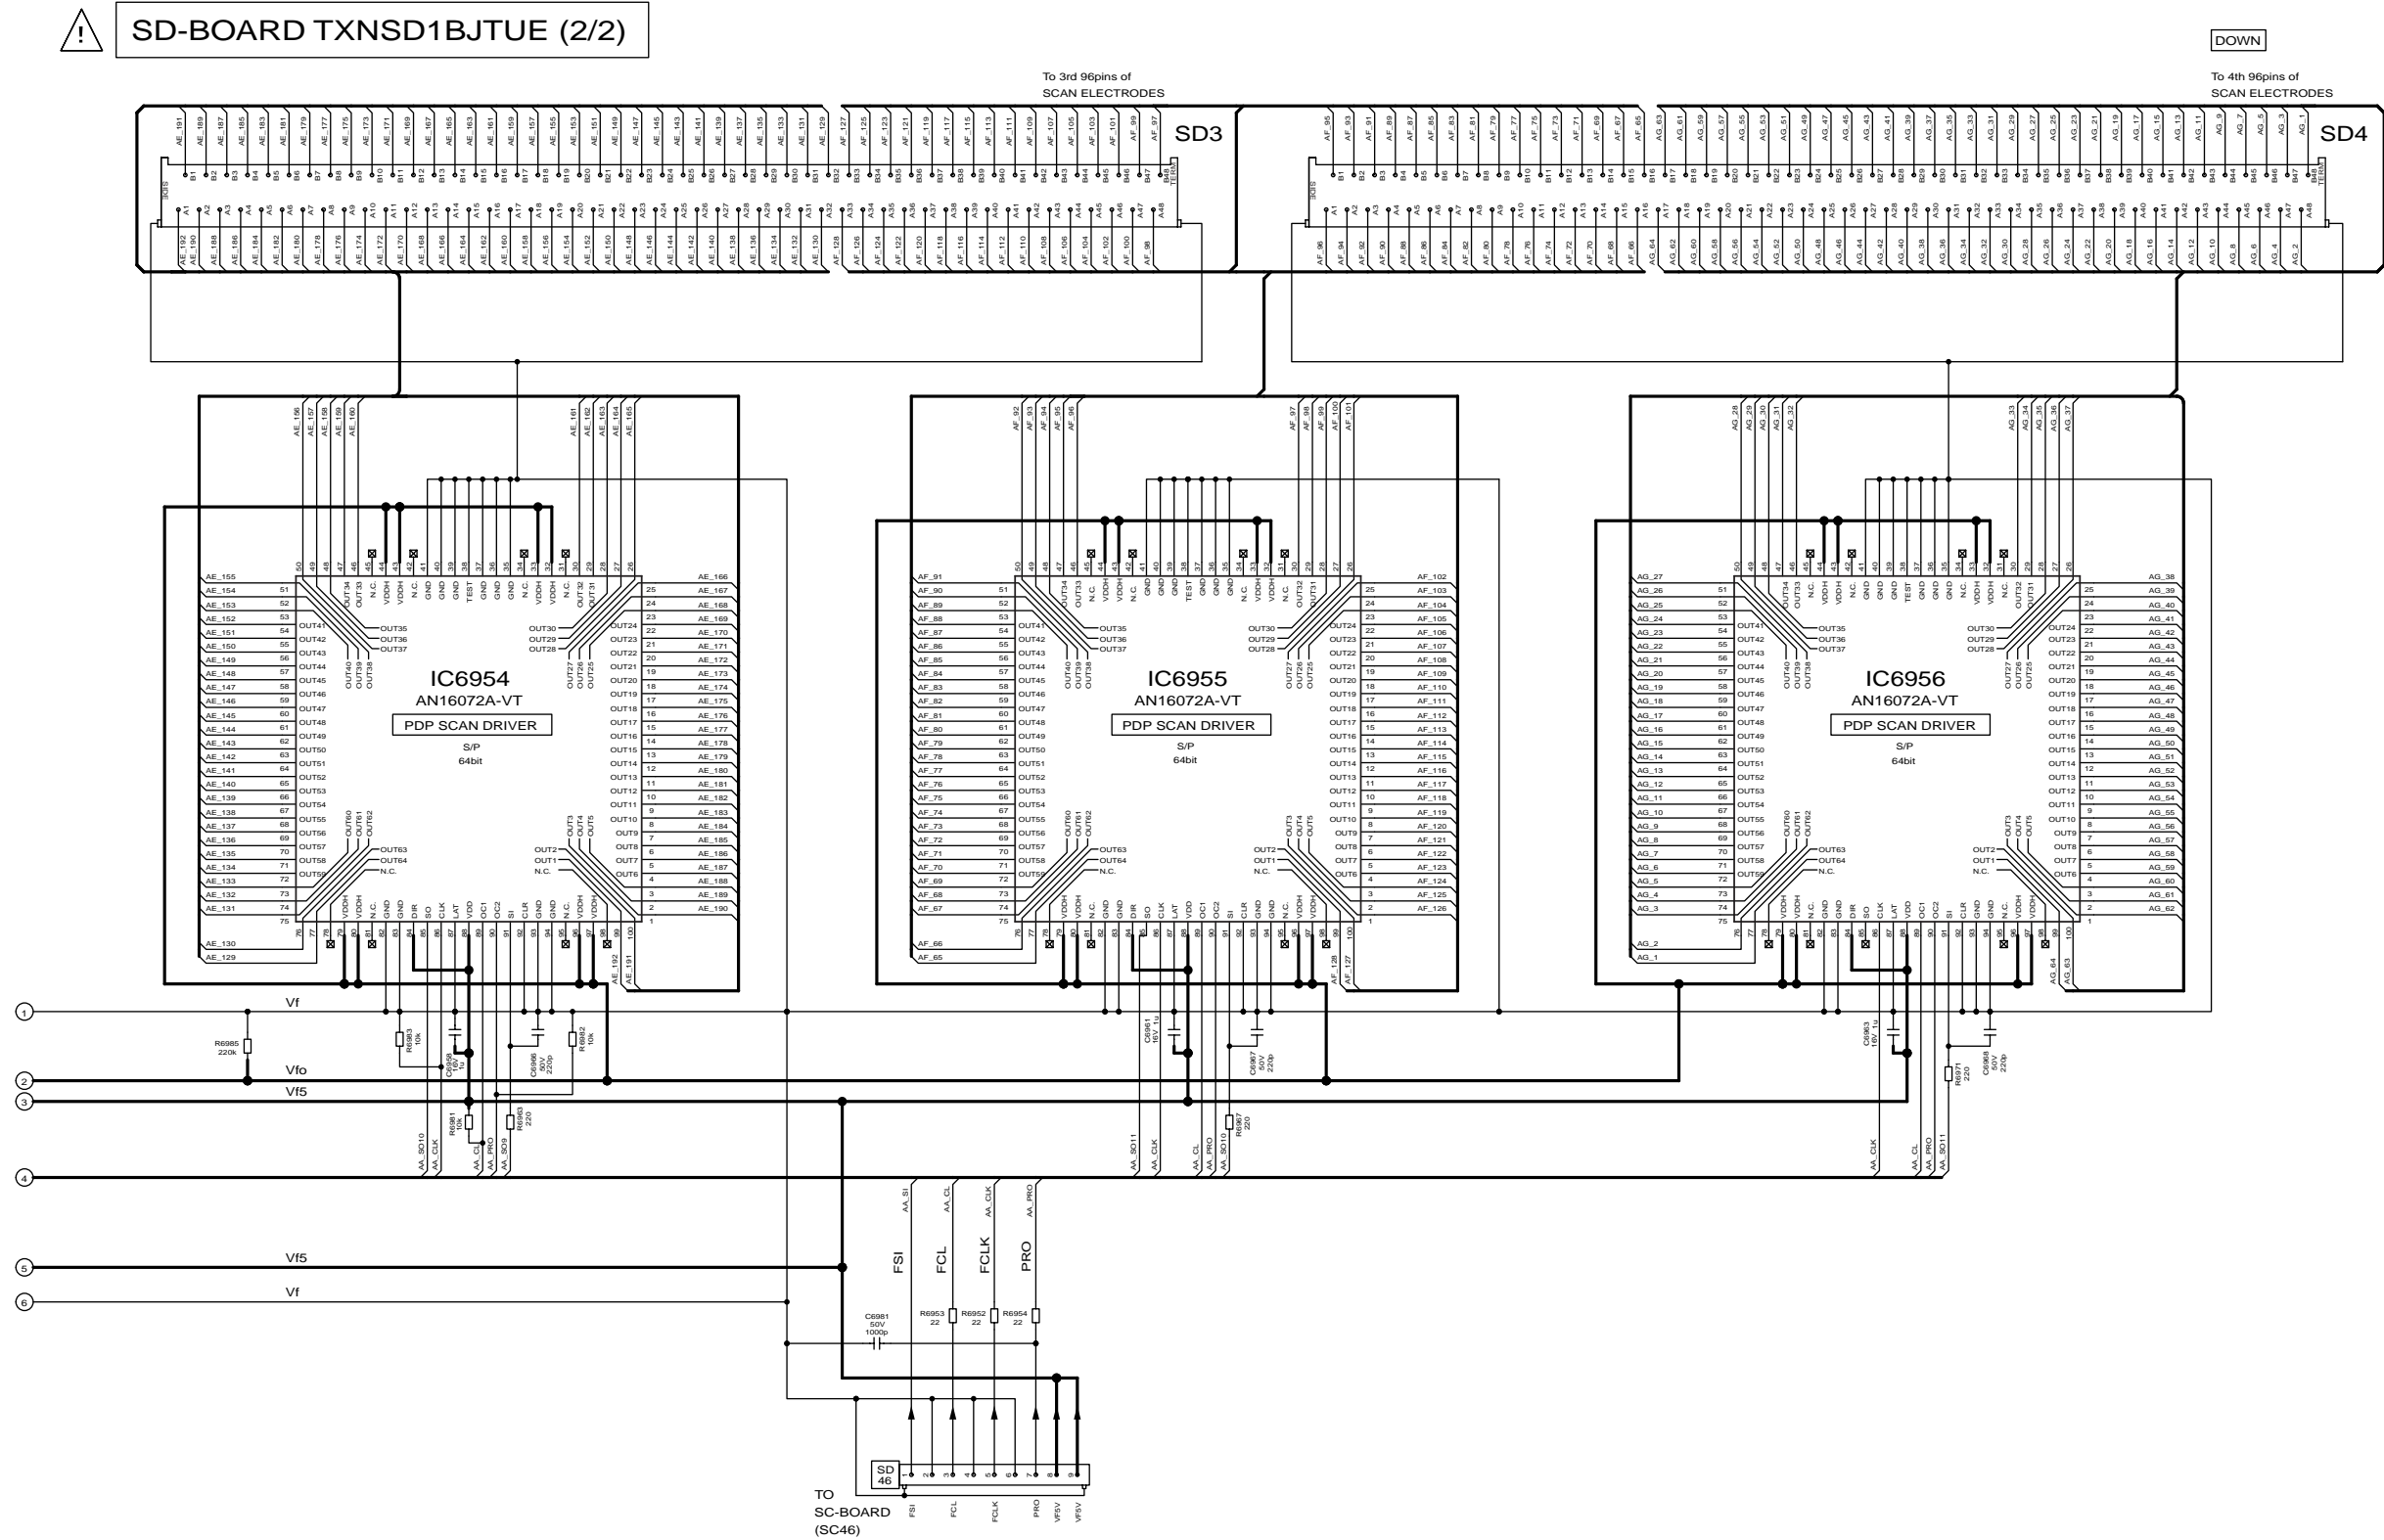

15.64. SS and S-Board Block Diagram

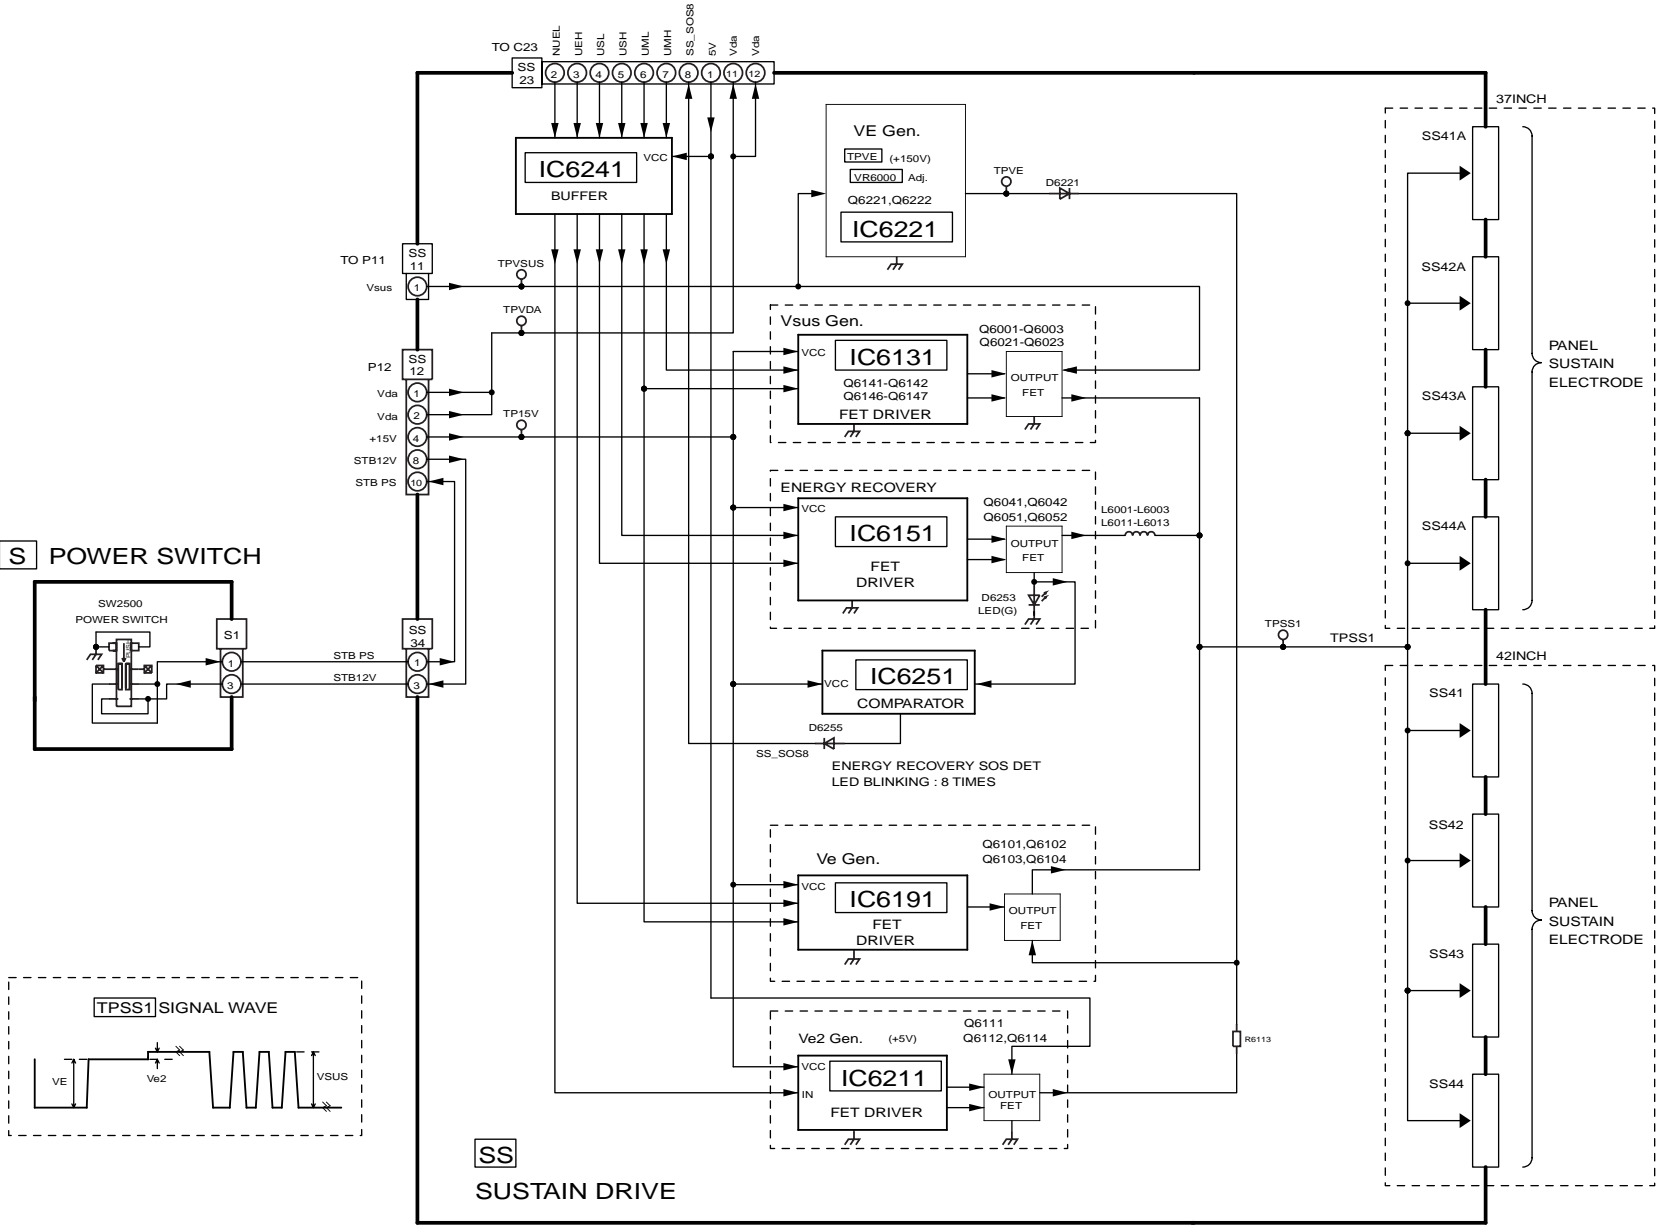


15.65. SS and S-Board Schematic Diagram

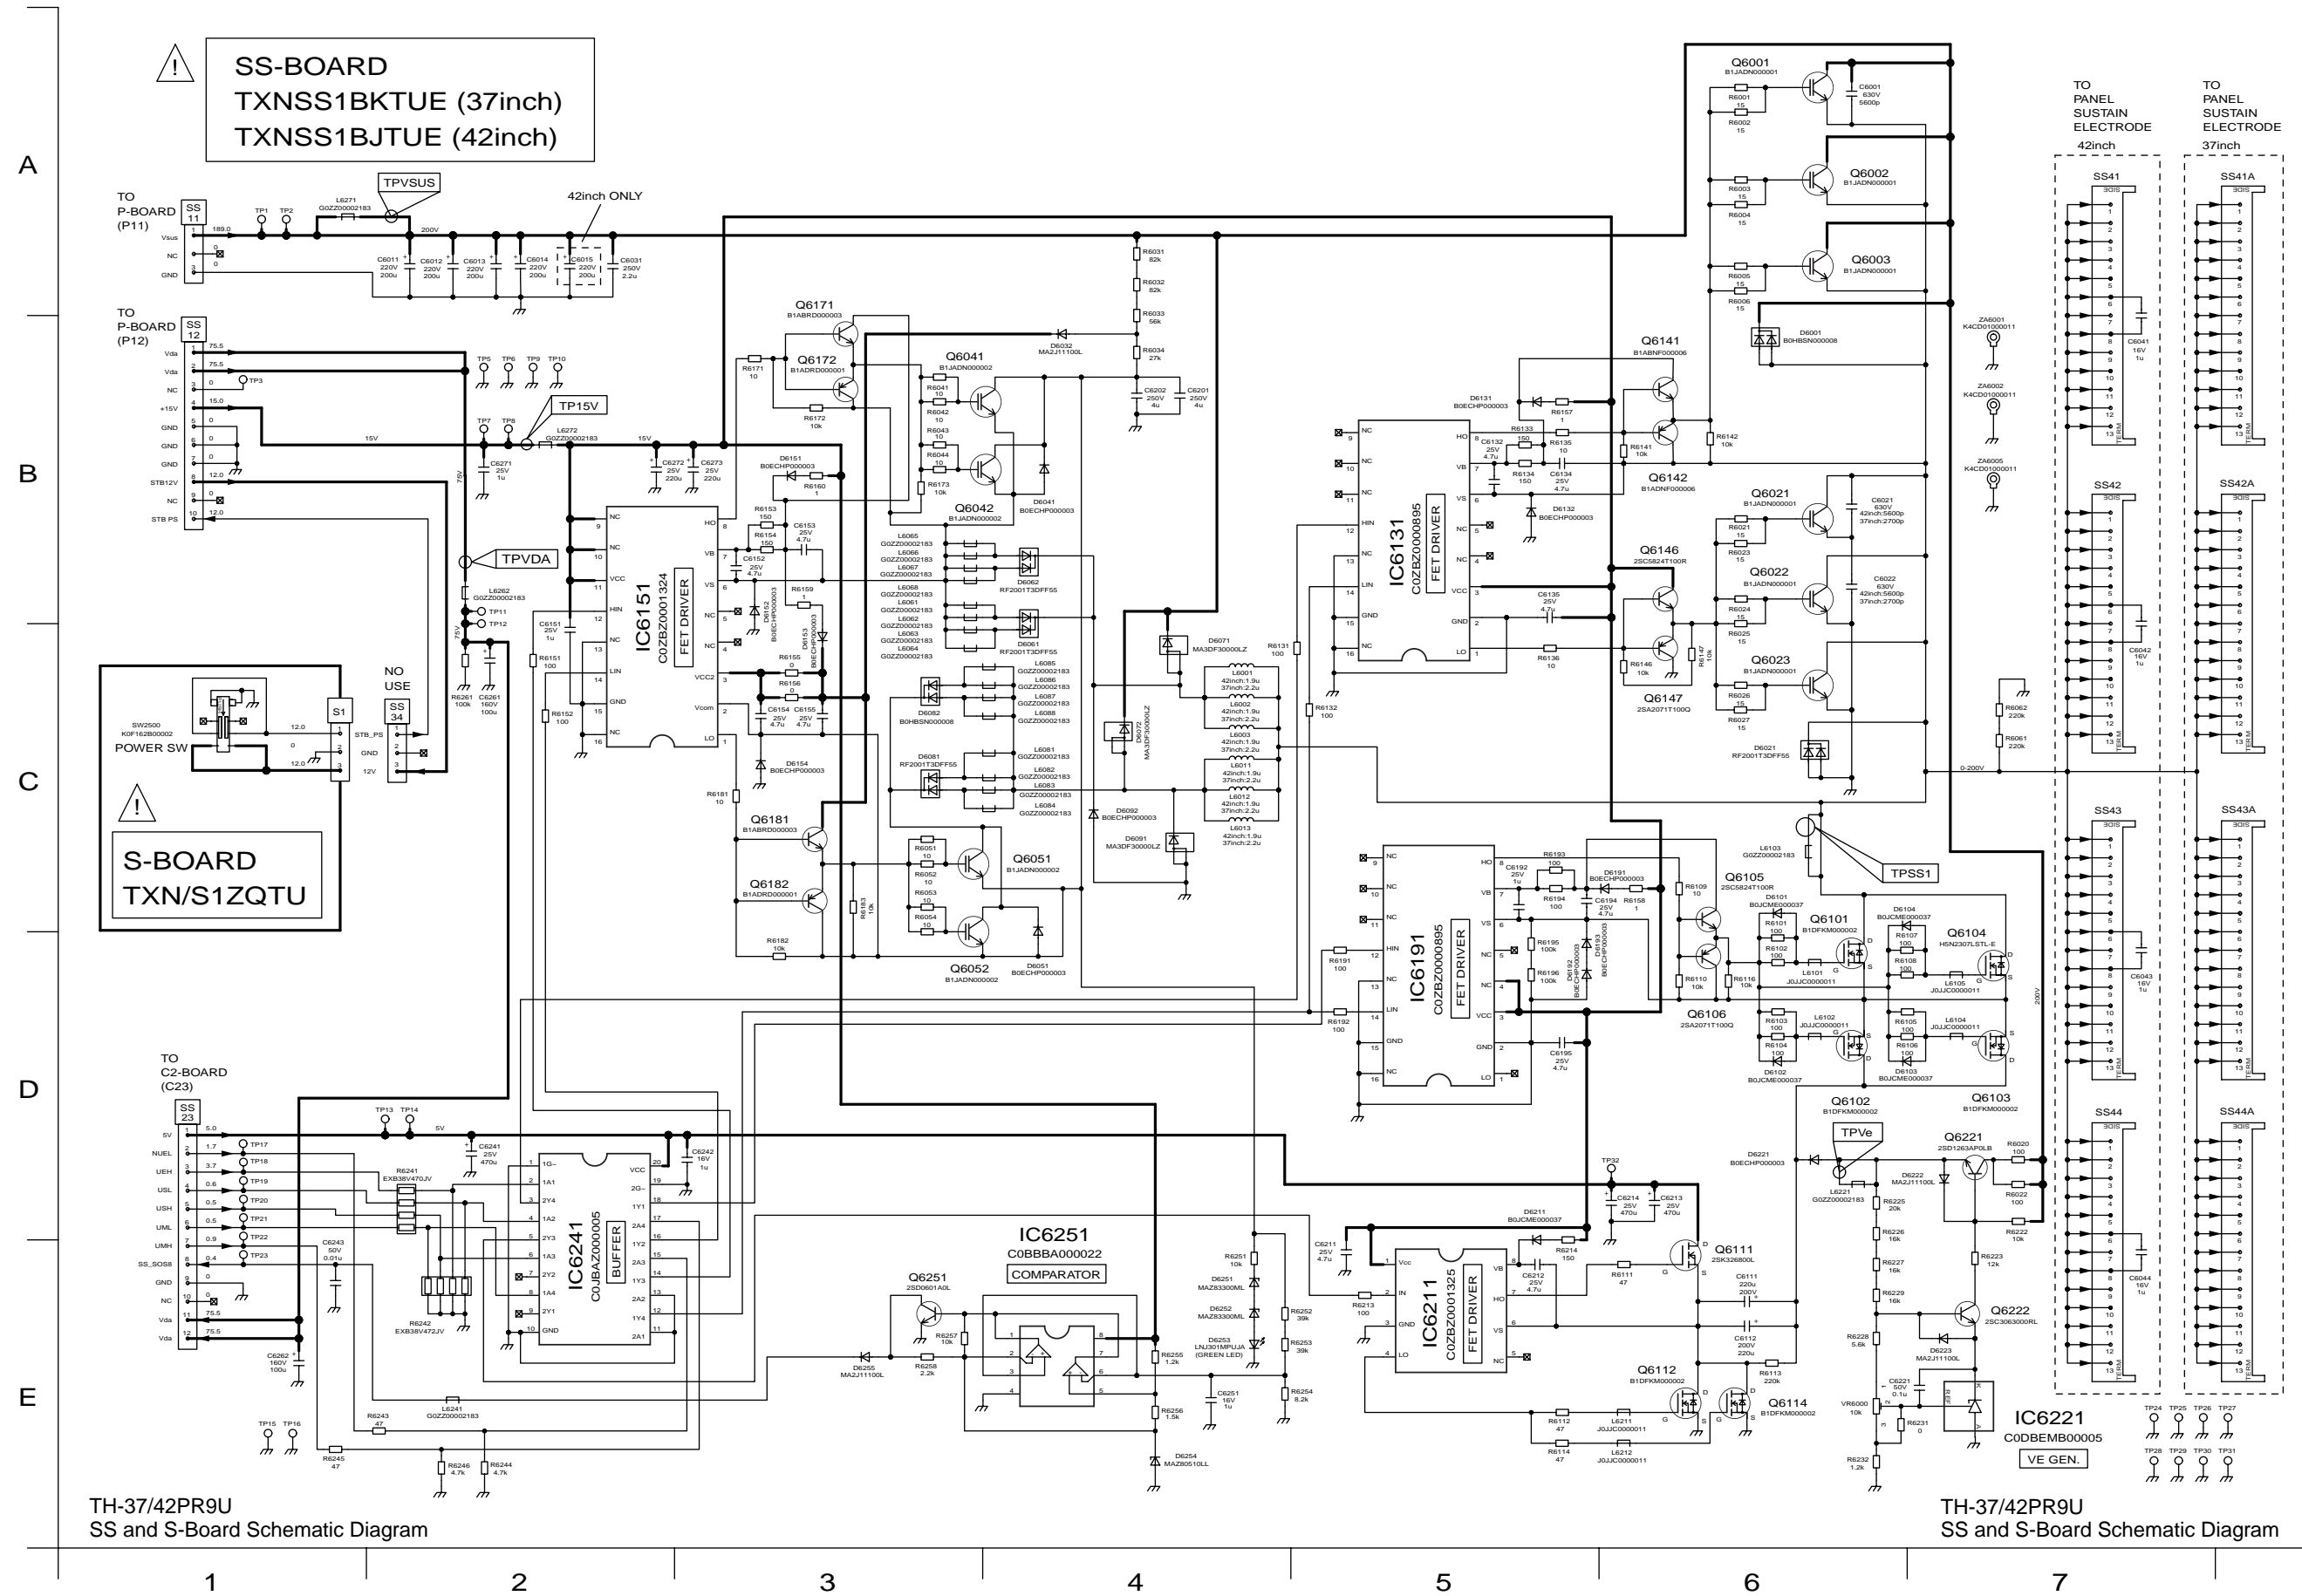


16 Parts Location

16.1. Exploded View


16.1.1. TH-37PR9U

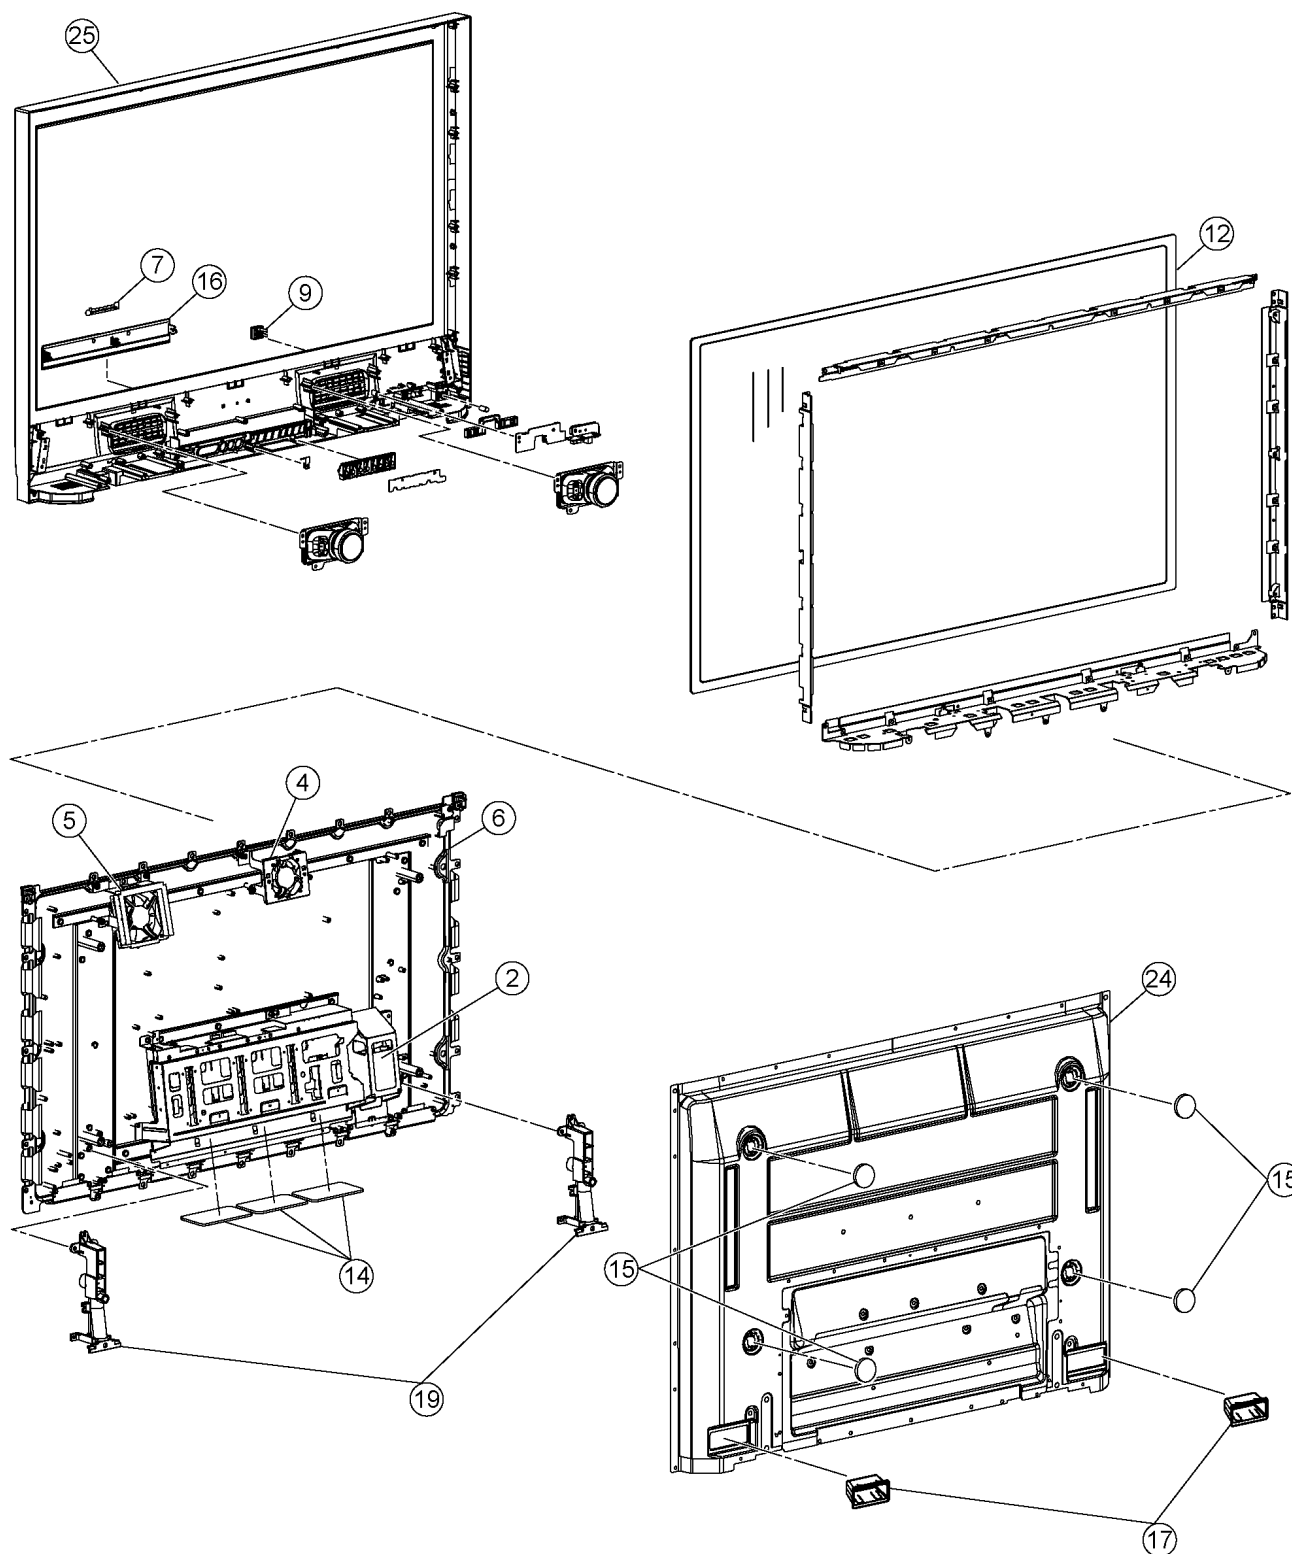

16.1.2. TH-42PR9U

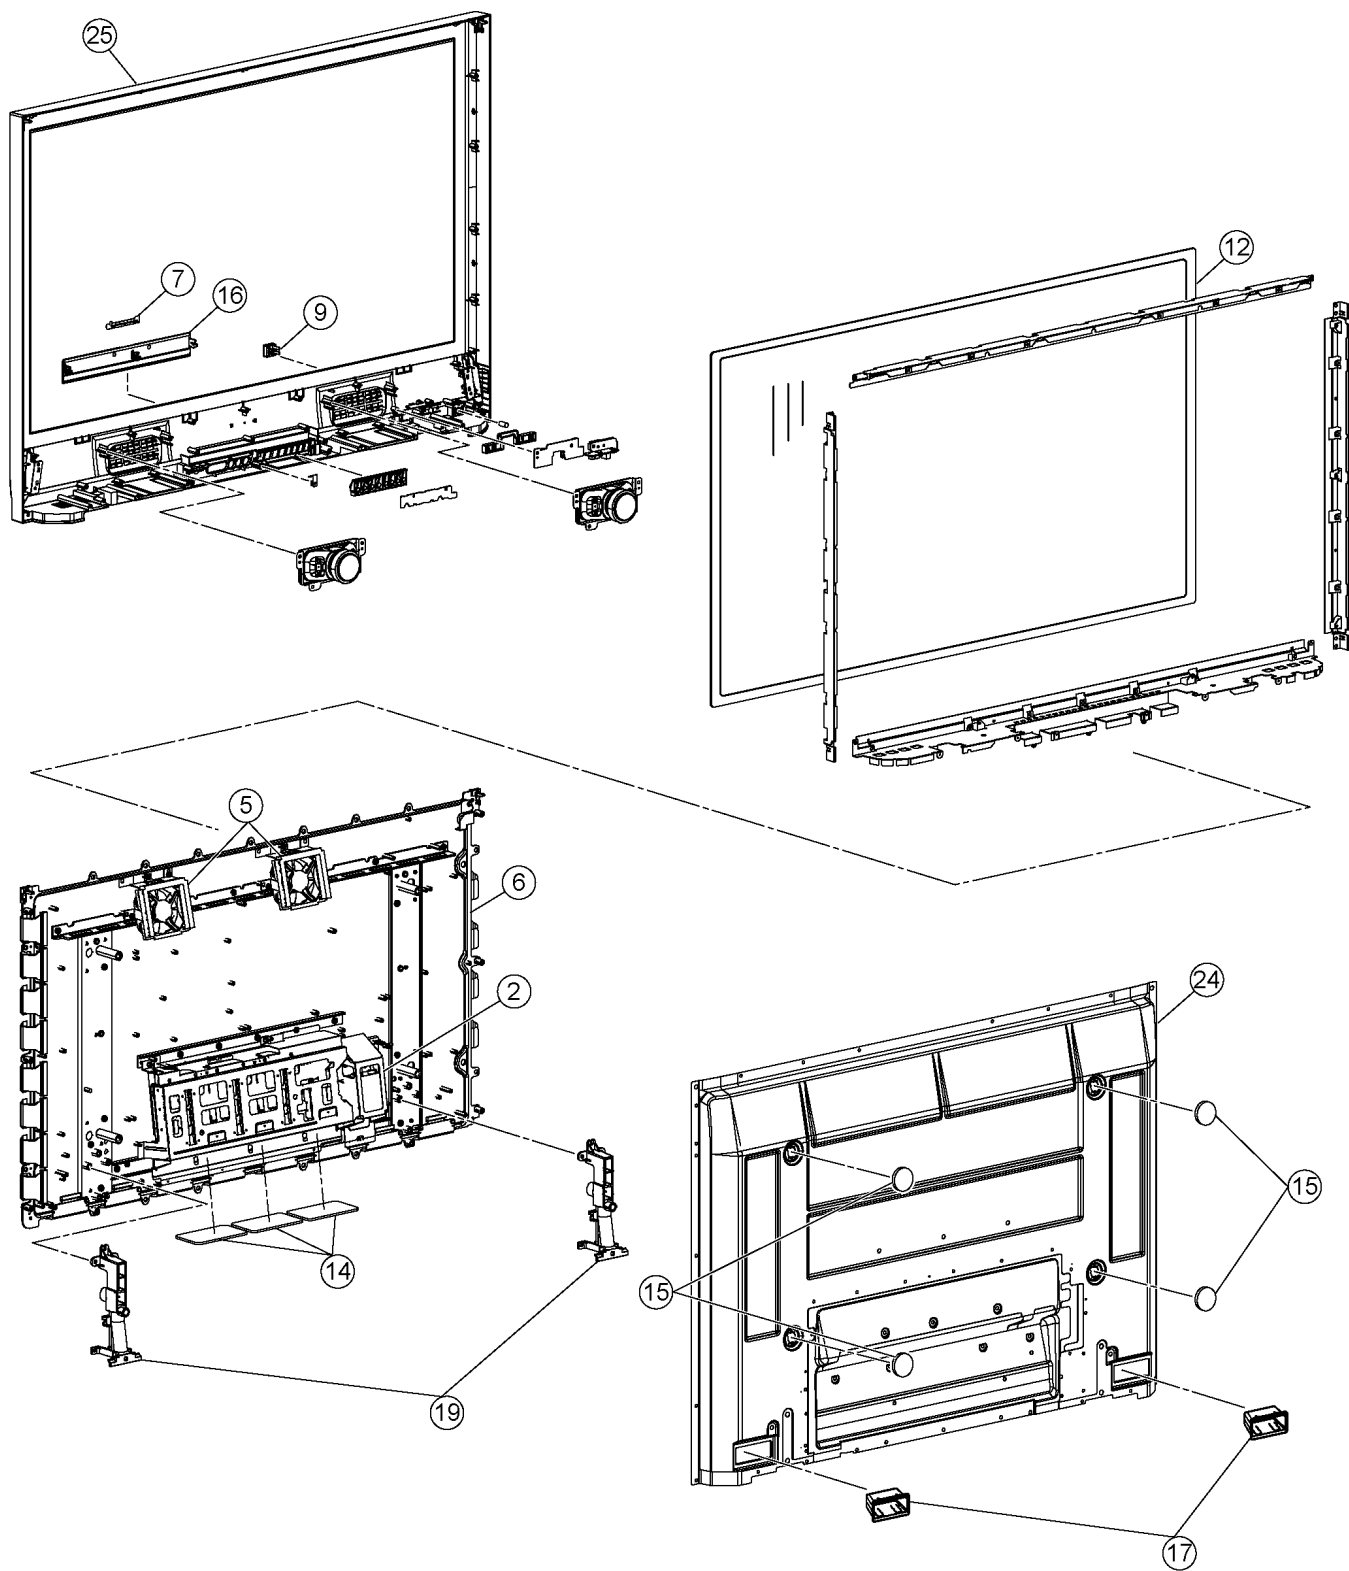


16.1.3. Escutcheon part location enlarged view (for 37/42 inch)

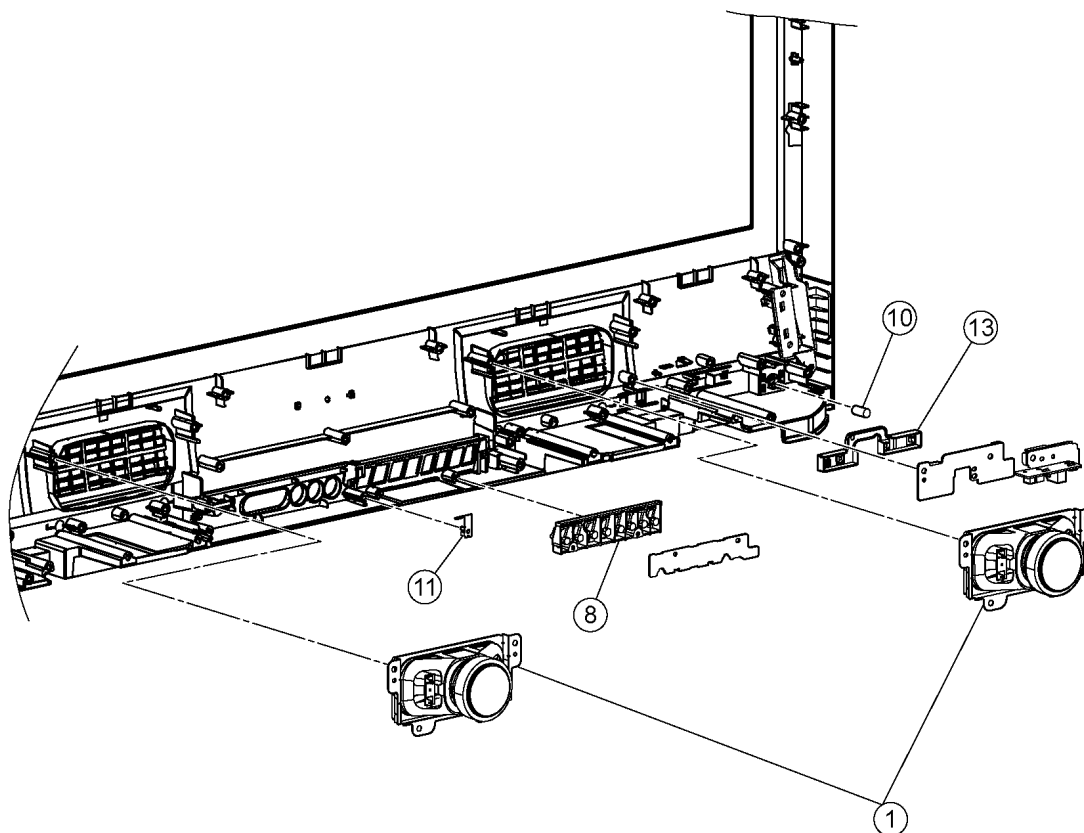


16.2. Cable relation


16.2.1. TH-37PR9U

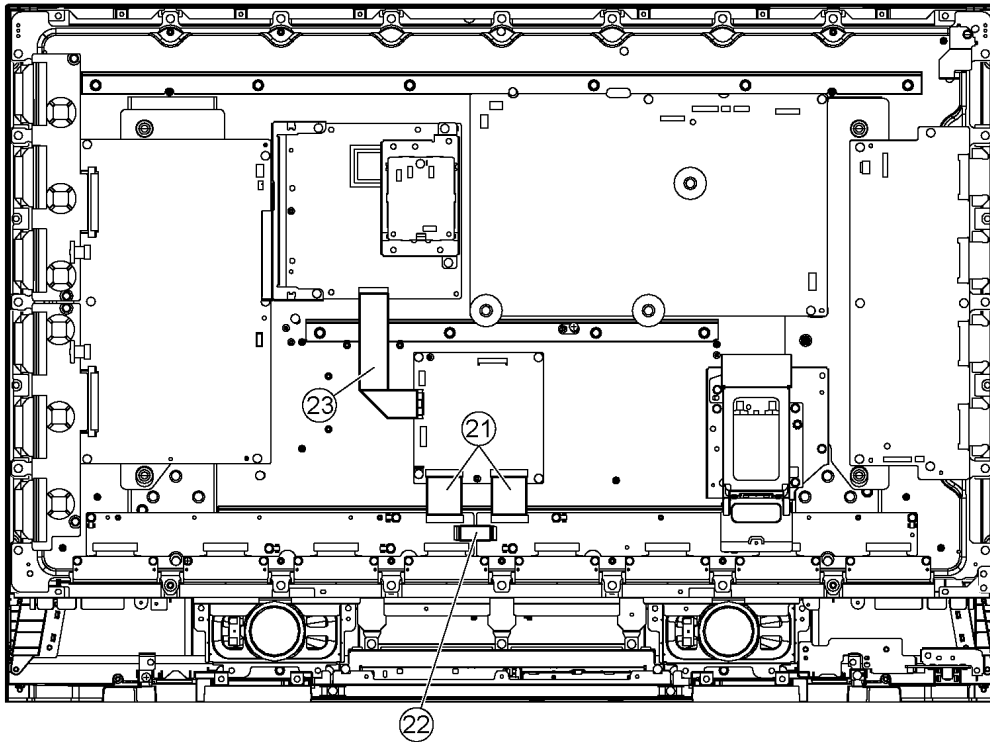

16.2.2. TH-42PR9U

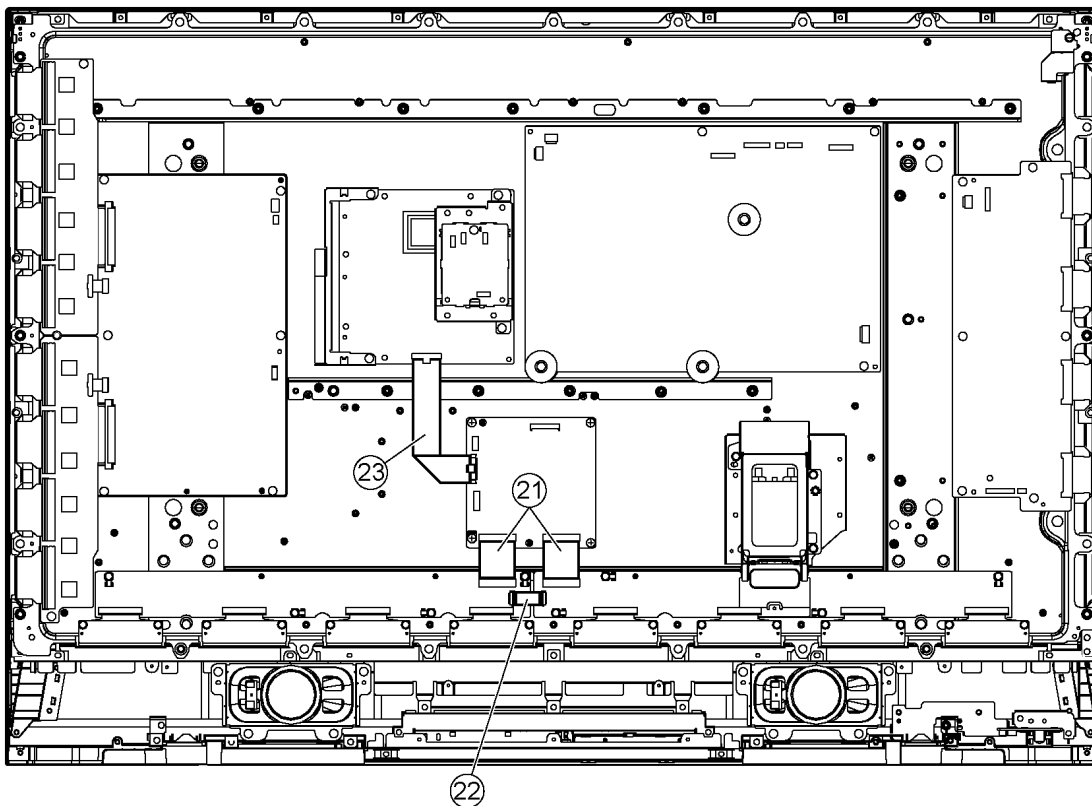

16.3. Accessories Box

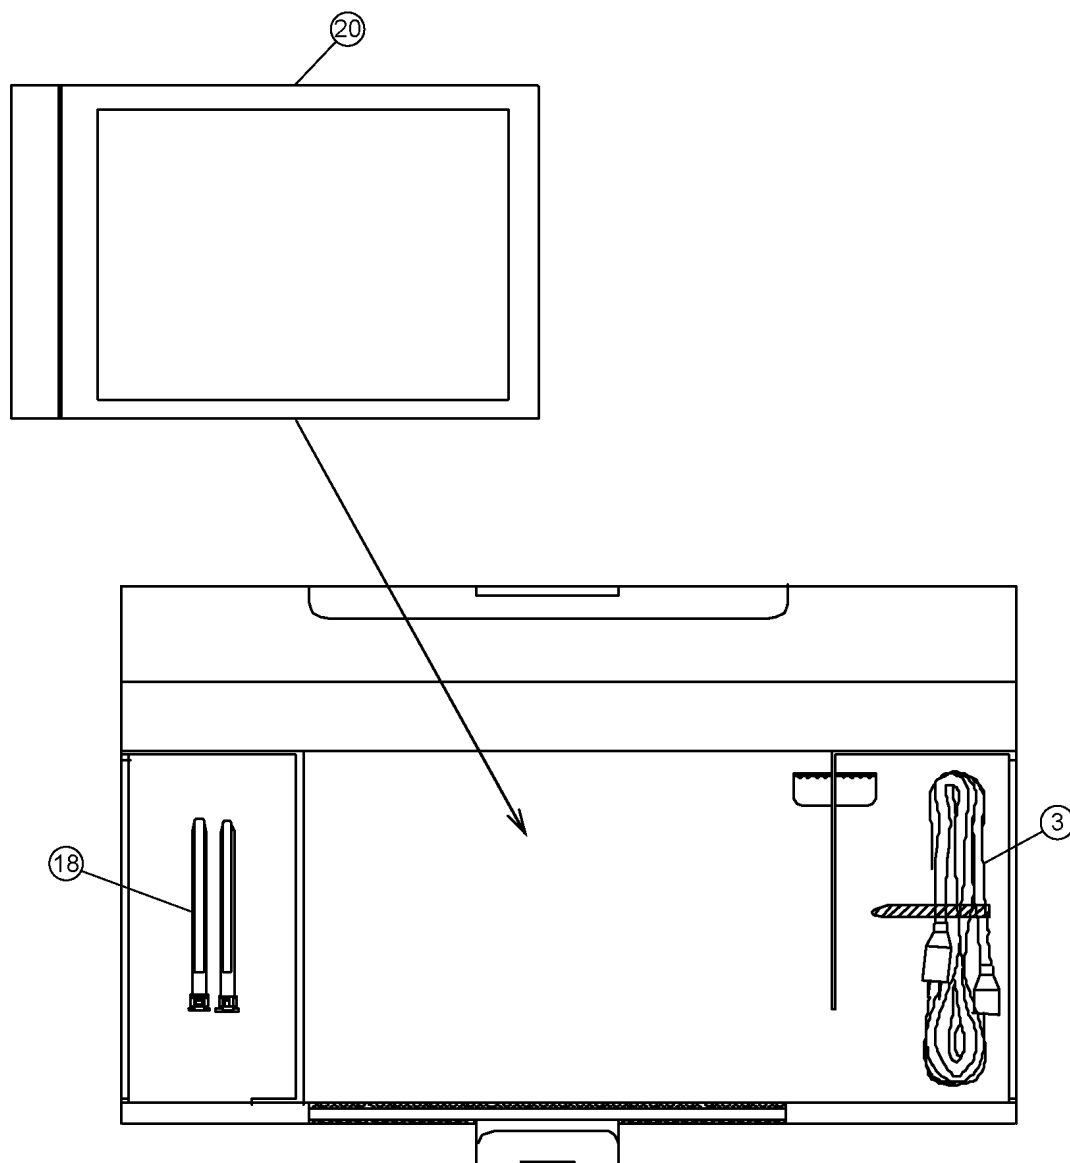

17 Mechanical Replacement Parts List

TH-37/42PR9U

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
1	EAS12S10A	SPEAKER	2	
2	K2AHYH000003	AC INLET	1	PAVCA TH-37PR9U ▲
2	K2AHYH000003	AC INLET	1	PAVCA TH-42PR9U ▲
3	K2CG3DH00025	AC CORD	1	▲
4	L6FAKEDH0013	FAN (60MM)	1	TH-37PR9U
5	L6FAYYYH0011	FAN (80MM)	1	TH-37PR9U
5	L6FAYYYH0011	FAN (80MM)	2	TH-42PR9U
6	MD37H09A1J	PLASMA DISPLAY PANEL	1	TH-37PR9U ▲
6	MD42H09A1J	PLASMA DISPLAY PANEL	1	TH-42PR9U ▲
7	TBMA185	PANASONIC BADGE	1	TH-37PR9U
7	TBMA185	PANASONIC BADGE	1	TH-42PR9U
8	TBX2AA3602	CONTROL BUTTON	1	PAVCA
9	TBX2AA3703	POWER BUTTON	1	PAVCA TH-37PR9U
9	TBX2AA3703	POWER BUTTON	1	PAVCA TH-42PR9U
10	TES2AA0141	SPRING	1	PAVCA
11	TES2AA0161	LEAF SPRING	1	PAVCA
12	TKGA5287	FRONT GLASS	1	PAVCA TH-37PR9U
12	TKGA5288	FRONT GLASS	1	PAVCA TH-42PR9U
13	TKK2AA7001	PANEL LIGHT	1	PAVCA
14	TKKL5266	COVER	3	TH-37PR9U
14	TKKL5266	COVER	3	TH-42PR9U
15	TKP2AA1931	M8-SPACER CAP	4	PAVCA TH-37PR9U
15	TKP2AA1931	M8-SPACER CAP	4	PAVCA TH-42PR9U
16	TKR2AA00112	DOOR	1	PAVCA TH-37PR9U
16	TKR2AA00112	DOOR	1	PAVCA TH-42PR9U
17	TKR2AA00121	REAR COVER HANDLE	2	PAVCA TH-37PR9U
17	TKR2AA00121	REAR COVER HANDLE	2	PAVCA TH-42PR9U
18	TMME187	CLAMPER	2	
19	TMZ2AX0011	STAND BRACKET	2	PAVCA TH-37PR9U
19	TMZ2AX0011	STAND BRACKET	2	PAVCA TH-42PR9U
20	TQB2AA0701	INSTRUCTION BOOK (ENG/FRE/SPA)	1	PAVCA ▲
21	TSXL513	CABLE(D31-C11/D32-C21)	2	TH-37PR9U
21	TSXL513	CABLE(D31-C11/D32-C21)	2	TH-42PR9U
22	TSXL519	CABLE(C12-C22)	1	TH-37PR9U
22	TSXL519	CABLE(C12-C22)	1	TH-42PR9U
23	TSXL543	CABLE(DA2-D3)	1	PAVCA TH-37PR9U
23	TSXL543	CABLE(DA2-D3)	1	PAVCA TH-42PR9U
24	TXFKU19QSER	REAR COVER	1	PAVCA TH-37PR9U ▲
24	TXFKU20QSER	REAR COVER	1	PAVCA TH-42PR9U ▲
25	TXFKY12QSER	ESCUTCHEON ASSY	1	PAVCA TH-42PR9U
25	TXFKY11QSER	ESCUTCHEON ASSY	1	PAVCA TH-37PR9U ▲
	TXJ/SPZQTU	SPEAKER LEAD	1	PAVCA

18 Replacement Parts List

18.1. Replacement Parts List Notes

Important Safety Notice

Components identified by Δ mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

RTL (Retention Time Limited)

Note: The marking (RTL) indicates that the Retention Time is Limited for this item.

After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention. After the end of this period, the assembly will no longer be available.

Abbreviation of part name and description

1. Resistor

Example:

ERD25TJ104 C 100KOHM, J, 1/4W

Type

Allowance

2. Capacitor

Example:

ECKF1H103ZF C 0.01UF, Z, 50V

Type

Allowance

Type	Allowance
C : Carbon	F : $\pm 1\%$
F : Fuse	G : $\pm 2\%$
M : Metal Oxide	J : $\pm 5\%$
Metal Film	K : $\pm 10\%$
S : Solid	M : $\pm 20\%$
W : Wire Wound	

Type	Allowance
C : Ceramic	C : $\pm 0.25\text{pF}$
E : Electrolytic	D : $\pm 0.5\text{pF}$
P : Polyester	F : $\pm 1\text{pF}$
Polyprop	G : $\pm 3\text{pF}$
lene	J : $\pm 5\text{pF}$
T : Tantalum	K : $\pm 10\text{pF}$
	L : $\pm 15\text{pF}$
	M : $\pm 20\text{pF}$
	P : +100%, -0%
	Z : +80%, -20%

18.2. TH-37PR9U Electrical Replacement Parts List

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
F401,402	K5D802BNA005	TIME LAG FUSE HIGH	2	△
F410	K5G102B00020	FUSE	1	△
C11	K1MN55BA0076	55P CONNECTOR	1	
C12	K1MN20BA0231	20P CONNECTOR	1	
C21	K1MN55BA0076	55P CONNECTOR	1	
C22	K1MN20BA0231	20P CONNECTOR	1	
C23	K1KA12BA0107	12P CONNECTOR	1	
C402	FLJ1C1050011	C 1UF, Z, 50V	1	
C404	F0CAF105A021	C 1UF, 250V	1	△
C407	EEUEB2W220B	E 22UF, 450V	1	△
C408	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C409	F0CAF225A021	C 22UF, 250V	1	△
C410	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C413	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C414	ECQU2A473ML	P 0.047UF, M, 250V	1	△
C421	FLJ1C1050011	C 1UF, Z, 50V	1	
C422	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C423	ECJ2XB1H472K	C 4700PF, K, 50V	1	
C425	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C426	ECJ2XC1H471J	C 470PF, J, 50V	1	
C427	FLJ1C1050011	C 1UF, Z, 50V	1	
C428	ECJ2XC1H221J	C 220PF, J, 50V	1	
C429	FLB2J4730001	C 0.047PF, , 600V	1	
C431	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C432	FLJ1C1050011	C 1UF, Z, 50V	1	
C433	ECJ3XB1E104K	C 0.1UF, K, 25V	1	
C434	FLJ1C1050011	C 1UF, Z, 50V	1	
C436	FLJ1C1050011	C 1UF, Z, 50V	1	
C440	ECA1HM100	E 10UF, 50V	1	
C443,44	FLA3A102A040	C 1000PF, J, 1KV	2	
C445	FLJ1C1050011	C 1UF, Z, 50V	1	
C446,47	F2B2W2010001	C 200UF, 450V	2	△
C450	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C451	FLA3A101A040	C 100PF, J, 1KV	1	
C457	ECWH12333RHV	P 0.013UF, J, 1.2KV	1	
C460,61	FLA3A331A039	E 330UF, 1KV	2	
C462	ECJ3YB1E105K	C 1UF, K, 25V	1	
C463	ECJ2XC1H220J	C 22UF, J, 50V	1	
C467	ECKCNA221KB7	C 220PF, M, ,	1	△
C468	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C469	ECKCNA221KB7	C 220PF, M, ,	1	△
C470	F0CAF105A021	C 1UF, 250V	1	△
C473,74	ECKCNA101KB7	C 100PF	2	△
C476	ECKCNA101KB7	C 100PF	1	△
C478	ECKCNA101KB7	C 100PF	1	△
C493	ECA1HM470	E 47UF, 50V	1	
C494	F2A2E1R00008	E 1.0UF, 250V	1	
C497	ECA1HM470	E 47UF, 50V	1	
C501,02	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C503	ECJ2XC1H471J	C 470PF, J, 50V	1	
C504	FLJ1C1050011	C 1UF, Z, 50V	1	
C505	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C506,07	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C508	ECJ2XC1H471J	C 470PF, J, 50V	1	
C509	ECA1EHG101	E 100UF, 25V	1	
C510	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C511	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C512-14	ECJ2XC1H471J	C 470PF, J, 50V	3	
C515	F2A1A1220011	E 1200UF, 10V	1	
C516	ECJ2XB1C474K	C 0.47UF, Z, 16V	1	
C517	F2A1E221A096	E 220UF, 25V	1	
C518	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C519	FLJ1C1050011	C 1UF, Z, 50V	1	
C520	ECWH8683RHV	P 0.068PF, J, 8KV	1	
C523	ECJ3YB1E105K	C 1UF, K, 25V	1	
C526	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C527	ECJ3YB1E475K	C 4.7UF, K, 25V	1	
C528,29	FLJ1C1050011	C 1UF, Z, 50V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C530	ECJ2VB1H333K	C 0.033UF, K, 50V	1	
C531	ECJ3YB1E105K	C 1UF, K, 25V	1	
C533	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C534	ECJ2XC1H471J	C 470PF, J, 50V	1	
C546,47	ECJ2XB1H102K	C 1000PF, K, 50V	2	
C550	ECJ2XC1H331J	C 330PF, J, 50V	1	
C551,52	ECJ2XB1H104K	C 0.1UF, K, 50V	2	
C554	FLJ1C1050011	C 1UF, Z, 50V	1	
C555	F2A2C101A120	E 1000UF, 160V	1	△
C556,57	EEUFC1E152	E 1500UF, 25V	2	
C558	F2A1E471A096	E 470UF, 25V	1	
C559	F2A1A1220011	E 1200UF, 10V	1	
C562	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C571	ECJ2XC1H330J	C 33PF, J, 50V	1	
C574	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C577	F2A2A330A022	E 33UF, 100V	1	△
C581	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C583	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C584,85	ECJ2XB1H223K	C 0.022UF, K, 50V	2	
C587	ECJ2XB1H332K	C 3300PF, K, 50V	1	
C601	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C603	ECJ2FB1E105K	C 1UF, K, 25V	1	
C604,05	F2A2D1510008	E 150UF, 200V	2	△
C607	FLJ1C1050011	C 1UF, Z, 50V	1	
C608	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C610	FLJ1C1050011	C 1UF, Z, 50V	1	
C611	F2B2T1420003	E 142UF, 220V	1	△
C612,13	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C615	F2B2T1420003	E 142UF, 220V	1	△
C616	FLA3A102A040	C 1000PF, J, 1KV	1	
C619	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C620	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C623	ECA1HM100	E 10UF, 50V	1	
C624	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C625	ECA1HM100	E 10UF, 50V	1	
C626	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C627	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C629-31	ECJ2XB1H103K	C 0.01UF, K, 50V	3	
C632	ECJ2XC1H331J	C 330PF, J, 50V	1	
C634	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C635	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C638,39	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C640	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C641	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C643	ECA1HM470	E 47UF, 50V	1	
C650	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C653	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C654	ECJ3YB1E105K	C 1UF, K, 25V	1	
C655,56	ECJ3YB1E225K	C 2.2UF, K, 25V	2	
C657	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C658	ECJ3YB1E105K	C 1UF, K, 25V	1	
C659	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C660	ECJ2FB1C225K	C 22UF, K, 16V	1	
C661,62	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C801	F2H1V221A004	E 220UF, 35V	1	PAVCA
C802	F2H1E471A010	E 470UF, 25V	1	PAVCA
C804	ECJ1VB1H472K	C 4700PF, K, 50V	1	
C805	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C806	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C807	ECJ3YF1E225Z	C 2.2UF, Z, 25V	1	PAVCA
C808	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C809	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C811	EEVHB1C471	E 470UF, 16V	1	
C812	F2H1E471A010	E 470UF, 25V	1	PAVCA
C814	ECJ1VB1H472K	C 4700PF, K, 50V	1	
C815	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C816	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C817	ECJ3YF1E225Z	C 2.2UF, Z, 25V	1	PAVCA
C818	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C819	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C821	EEVHB1C471	E 470UF, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C822	F2H1E471A010	E 470UF, 25V	1	PAVCA
C823	ECJ1XC1H470J	C 47PF, J, 50V	1	
C824	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C825	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C827	ECJ3YF1E225Z	C 2.2UF, Z, 25V	1	PAVCA
C828	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C829	ECJ3YB1E106M	C 10 UF, K, 25V	1	
C831	EEEB1C470P	C 47PF, J, 16V	1	
C832	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C833	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C834,35	EEEB1C470P	C 47PF, J, 16V	2	
C837	FLJ0J1060004	C 0.010UF, K, 16V	1	
C838	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C839	FLJ0J1060004	C 0.010UF, K, 16V	1	
C840	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C841	FLJ0J1060004	C 0.010UF, K, 16V	1	
C843	ECJ3YB1E106M	C 10 UF, K, 25V	1	
C844	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C845	ECJ3YB1E106M	C 10 UF, K, 25V	1	
C846	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C847	FLJ0J1060004	C 0.010UF, K, 16V	1	
C848	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C850	ECQB1H104JF	P 0.1UF, J, 50V	1	
C852	ECA1EM471	E 470UF, 25V	1	
C854	EEUFC1C471	E 470UF, 16V	1	
C855-57	ECJ1VB1H103K	C 0.001UF, K, 50V	3	
C867	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C869	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C2350,5	ECJ3YB1C225K	C 0.022UF, K, 16V	2	
C2352,5	EEEB1H100P	C 10PF, J, 50V	2	
C2354,5	EEEB1V470P	E 47UF, 35V	2	
C2356,5	ECJ1XB1H102K	C 1000UF, Z, 50V	2	
C2358,5	EEEB1V2R2R	E 2.2UF, 35V	2	
C2360,6	ECJ1XC1H102J	C 1000PF, J, 50V	2	
C2362,6	EEEB1E471UP	C 470PF, J, 25V	2	
C2364,6	ECQV1H104JM	P 0.1UF, J, 50V	2	
C2366,6	ECJ3YB1E225K	C 2.2UF, K, 25V	2	
C2368,6	ECQV1H104JM	P 0.1UF, J, 50V	2	
C2370,7	EEEB1H100P	C 10PF, J, 50V	2	
C2373-75	ECJ1VB1E104K	C 0.10UF, K, 25V	3	
C2376,7	ECJ1XC1H150J	C 15PF, J, 50V	2	
C2378-82	ECJ1VB1E104K	C 0.10UF, K, 25V	5	
C2383	EEEB1A101P	C 100PF, J, 10V	1	
C2384	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C2385	EEEB1A101P	C 100PF, J, 10V	1	
C2386,8	EEEB1H1R0R	C 1.0PF, J, 50V	2	
C2388	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C2389	EEEB1A101P	C 100PF, J, 10V	1	
C2390	EEEB1H100P	C 10PF, J, 50V	1	
C2391	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C2392,9	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C2394	EEEB1H100P	C 10PF, J, 50V	1	
C2395,9	ECJ1VB1E104K	C 0.10UF, K, 25V	2	
C2397	EEEB1A101P	C 100PF, J, 10V	1	
C2398-03	ECJ1VB1E104K	C 0.10UF, K, 25V	6	
C2404	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C2405,0	ECJ1VB0J225K	C 2.2UF, K, 6.3V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C2407,0	FLJ0J1060004	C 0.010UF, K, 16V	2	
C2409,1	ECJ1XC1H181J	C 180PF, J, 50V	2	
C2411	ECJ3YB1E106M	C 10 UF, K, 25V	1	
C2412,1	ECJ1VB1E104K	C 0.10UF, K, 25V	2	
C2420	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C2425,2	ECJ1VB1E104K	C 0.10UF, K, 25V	2	
C2512	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C2515	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C2521	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C3001	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C3004	EEEB1C470P	C 47PF, J, 16V	1	
C3009-11	ECJ1VB1E104K	C 0.10UF, K, 25V	3	
C3012-17	ECJ1VF1H103Z	C 0.010UF, Z, 50V	6	
C3018	EEEB1C470P	C 47PF, J, 16V	1	
C3019	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3020-31	ECJ3YB1C225K	C 0.022UF, K, 16V	12	
C3032	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C3033-35	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C3040,4	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C3042,4	EEEB1C100R	C 10PF, J, 16V	2	
C3051-58	ECJ1VF1C105Z	C 1UF, Z, 16V	8	
C3101	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C3103	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C3105-08	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C3110	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C3111,1	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C3113	EEEB1C470P	C 47PF, J, 16V	1	
C3114	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C3115	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3134-36	F2H0J102A010	C 1000UF, 6.3V	3	
C3143,4	ECJ3YB1C225K	C 0.022UF, K, 16V	2	
C3146	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C3150-52	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C3200	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3201-03	FLJ0J1060004	C 0.010UF, K, 16V	3	
C3404	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3405	EEEB1C470P	C 47PF, J, 16V	1	
C3409	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3523	EEEB1C470P	C 47PF, J, 16V	1	
C3524	ECJ2VF1H103Z	C 0.010UF, Z, 50V	1	
C3550	ECJ2VF1H103Z	C 0.010UF, Z, 50V	1	
C3551	EEEB1C470P	C 47PF, J, 16V	1	
C3561,6	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3750	ECJ2XC1H102K	C 1000PF, K, 50V	1	
C4001,0	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C4003	ECJ1VB1H822K	C 8200PF, K, 50V	1	
C4004	ECJ1VB1C823K	C 0.082UF, K, 16V	1	
C4006	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4007-09	ECJ2XB1E104K	C 0.1UF, K, 25V	3	
C4010	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C4011-13	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C4016	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4017	EEEB1C470P	C 47PF, J, 16V	1	
C4018,1	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C4020,21	FLJ0J106A013	C 0.010UF, K, 16V	2	
C4022	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4024	FLJ0J106A013	C 0.010UF, K, 16V	1	
C4031,32	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C4201	EEH1B1C470P	C 47PF, J, 16V	1	
C4202-13	ECJ1XB1C104K	C 0.1UF, Z, 16V	12	
C4219-22	FLJ0J106A013	C 0.010UF, K, 16V	4	
C4225	FLJ0J106A013	C 0.010UF, K, 16V	1	
C4227	FLJ0J106A013	C 0.010UF, K, 16V	1	
C4301	F2G0J470A019	E 47UF 6.3V	1	
C4302	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4303,04	ECJ1XB1H102K	C 1000UF, Z, 50V	2	
C4305,06	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4307	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C4308	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4309	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4311	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4312	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4313	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C4502	FLJ0J1060004	C 0.010UF, K, 16V	1	
C4503,04	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4505	ECJ1XC1H150J	C 15PF, J, 50V	1	
C4506	ECJ1VC1H080C	C 8PF, C, 50V	1	
C4541,42	ECJ1XC1H080D	C 8PF, D, 50V	2	
C4543	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4544	EEH1B0G221P	C 220PF, J, 4V	1	
C4545	FLJ0J106A013	C 0.010UF, K, 16V	1	
C4546,47	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C4548,49	FLJ0J106A013	C 0.010UF, K, 16V	2	
C4550,51	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C4552	FLJ0J106A013	C 0.010UF, K, 16V	1	
C4553-97	ECJ1XF1C104Z	C 0.1UF, Z, 16V	45	
C4598	EEH1B0G221P	C 220PF, J, 4V	1	
C4599-14	ECJ1XB1C104K	C 0.1UF, Z, 16V	16	
C4629	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4671	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4672	FLJ0J1060004	C 0.010UF, K, 16V	1	
C4701	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4703	FLJ0J106A013	C 0.010UF, K, 16V	1	
C4704-19	ECJ1XB1C104K	C 0.1UF, Z, 16V	16	
C4733	ECJ1XF1H102Z	C 1000PF, Z, 50V	1	
C4743	TCUY1C105ZFN	C 1UF, 16V	1	
C4744	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4749,50	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C4751,52	ECJ1XC1H150J	C 15PF, J, 50V	2	
C4753	ECJ1XF1H102Z	C 1000PF, Z, 50V	1	
C4754	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4803	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4804	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4861	TCUY1C105ZFN	C 1UF, 16V	1	
C4862	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4863	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4864	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4865	ECJ2FF1C475Z	C 0.047UF, Z, 16V	1	
C4866	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4871	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4881,82	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C4884,85	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C4886	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4887	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C4901,02	ECJ3YB1E106M	C 10 UF, K, 25V	2	
C4903	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C4904	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4905	ECJ1VB1H822K	C 8200PF, K, 50V	1	
C4906	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4907	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4908	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C4909	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C4910	ECJ3YB1E106M	C 10 UF, K, 25V	1	
C4911	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C4912	ECJ3YB1E106M	C 10 UF, K, 25V	1	
C4913	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4914	EEH1B1C470P	C 47PF, J, 16V	1	
C4915	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4917	EEH1B1C470P	C 47PF, J, 16V	1	
C4918	ECJ3YB1E106M	C 10 UF, K, 25V	1	
C4919	ECJ1VB0J475K	C 4.7UF, K, 6.3V	1	
C4920	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4921	ECGRL0G680ER	C 68PF, J, 4V	1	
C4923	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C4924	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4925	ECJ1VB1E272K	C 2700PF, K, 25V	1	
C4926	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4927	ECJ1XC1H470J	C 47PF, J, 50V	1	
C4928	ECJ1VB1H472K	C 4700PF, K, 50V	1	
C4929	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C4930,31	ECJ3YB1E106M	C 10 UF, K, 25V	2	
C4932	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C4933	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4934	ECJ1VB1H822K	C 8200PF, K, 50V	1	
C4935	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4936	ECJ1VC1H100C	C 10PF, C, 50V	1	
C4937	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C4938	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C4939	ECJ1VB0J475K	C 4.7UF, K, 6.3V	1	
C4940	ECGRL0G680ER	C 68PF, J, 4V	1	
C4942	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4943	ECJ1VC1H100C	C 10PF, C, 50V	1	
C4944	ECJ1VB0J475K	C 4.7UF, K, 6.3V	1	
C4945	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4946	ECGRL0G680ER	C 68PF, J, 4V	1	
C4990	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4991	FLJ0J106A013	C 0.010UF, K, 16V	1	
C4992,93	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C4994,95	FLJ0J106A013	C 0.010UF, K, 16V	2	
C4996	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4997	FLJ0J106A013	C 0.010UF, K, 16V	1	
C4998	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4999	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C6001	F1L2J562A022	C 5600UF, K, 6.3V	1	
C6011-14	F2A2T201A001	E 200UF,	4	
C6021	F1L2J562A022	C 5600UF, K, 6.3V	1	
C6031	ECQE2255JF	P 2.5UF, K, 250V	1	
C6041-44	TCUY1C105ZFN	C 1UF, 16V	4	
C6111,12	F2A2D221A022	E 220UF, 200V	2	
C6132	F1L1E4750004	C 4.7UF, 25V	1	
C6134,35	F1L1E4750004	C 4.7UF, 25V	2	
C6151	F1K1E1050001	C 1UF, Z, 25V	1	
C6152-55	F1L1E4750004	C 4.7UF, 25V	4	
C6192	F1K1E1050001	C 1UF, Z, 25V	1	
C6194,95	F1L1E4750004	C 4.7UF, 25V	2	
C6201,02	F0C2E405A176	E 0.040UF, 250V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6211,12	F1L1E4750004	C 4.7UF, 25V	2	
C6213,14	ECA1EM471	E 470UF, 25V	2	
C6221	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6241	ECA1EM471	E 470UF, 25V	1	
C6242	TCUY1C105ZFN	C 1UF, 16V	1	
C6243	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6251	TCUY1C105ZFN	C 1UF, 16V	1	
C6261,62	ECA2CM101	E 100UF, 160V	2	
C6271	F1K1E1050001	C 1UF, Z, 25V	1	
C6272,73	EEUFC1E221	E 220UF, 25V	2	
C6401	F1L2J562A022	C 5600UF, K,6.3V	1	
C6411-14	F2A2T201A001	E 200UF,	4	
C6421	F1L2J562A022	C 5600UF, K,6.3V	1	
C6431	F0C2E405A176	E 0.040UF, 250V	1	
C6472	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6480	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6502	F1L1E4750004	C 4.7UF, 25V	1	
C6504,05	F1L1E4750004	C 4.7UF, 25V	2	
C6511,12	F0C2E405A176	E 0.040UF, 250V	2	
C6521	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6522	F1L1E4750004	C 4.7UF, 25V	1	
C6524,25	F1L1E4750004	C 4.7UF, 25V	2	
C6527	F1L1E4750004	C 4.7UF, 25V	1	
C6561	F2A1A1010074	E 100UF, 10V	1	
C6563	F2A1A1010074	E 100UF, 10V	1	
C6565,66	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C6581	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6582	TCUY1C105ZFN	C 1UF, 16V	1	
C6591	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6592	ECA1EM471	E 470UF, 25V	1	
C6593	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C6601,02	F1L1E4750004	C 4.7UF, 25V	2	
C6603	F1K2J102A014	C 1000UF, K,6.3V	1	
C6604	F2A2V470A020	E 47UF, 350V	1	
C6605	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6606	F1K2J102A014	C 1000UF, K,6.3V	1	
C6610	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6611	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6612	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6620	ECJ3XB2J222K	C 2200PF, K,630V	1	
C6641	ECQE2224KF	P 2.2UF, K,250V	1	
C6661,62	F1K2J102A014	C 1000UF, K,6.3V	2	
C6671	F1L1E4750004	C 4.7UF, 25V	1	
C6681,82	F1L1E4750004	C 4.7UF, 25V	2	
C6683	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6691	ECA2CM101	E 100UF, 160V	1	
C6701-08	ECJ2XB1H104K	C 0.1UF, K, 50V	8	
C6721	ECA1HM101	E 100UF, 50V	1	
C6723-25	F1L1E4750004	C 4.7UF, 25V	3	
C6726,27	TCUY1C105ZFN	C 1UF, 16V	2	
C6728	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C6752	TCUY1C105ZFN	C 1UF, 16V	1	
C6753	F1L1E4750004	C 4.7UF, 25V	1	
C6754	ECA1VM470	E 47UF, 35V	1	
C6755	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6771	TCUY1C105ZFN	C 1UF, 16V	1	
C6772,73	F1L1E4750004	C 4.7UF, 25V	2	
C6775	F1L1E4750004	C 4.7UF, 25V	1	
C6776,77	ECJ2XB1H104K	C 0.1UF, K, 50V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6791	EEUFC1E221	E 220UF, 25V	1	
C6795,96	EEUFC1E221	E 220UF, 25V	2	
C6802	EEUFC1E221	E 220UF, 25V	1	
C6803	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6804	F2A2E100A022	E 10UF, 250V	1	
C6805	TCUY1C105ZFN	C 1UF, 16V	1	
C6806,07	ECA2CM101	E 100UF, 160V	2	
C6811	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6812	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6822	F2A2V100A019	E 10UF, 350V	1	
C6823	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6841,42	ECA2CM101	E 100UF, 160V	2	
C6845	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6861	TCUY1C105ZFN	C 1UF, 16V	1	
C6862	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6863	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6871	TCUY1C105ZFN	C 1UF, 16V	1	
C6872	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6873	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6901	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C6902	TCUY1C105ZFN	C 1UF, 16V	1	
C6904	TCUY1C105ZFN	C 1UF, 16V	1	
C6906	TCUY1C105ZFN	C 1UF, 16V	1	
C6908	TCUY1C105ZFN	C 1UF, 16V	1	
C6910	TCUY1C105ZFN	C 1UF, 16V	1	
C6912	TCUY1C105ZFN	C 1UF, 16V	1	
C6914-18	ECJ2XB1H221K	C 220PF, K, 50V	5	
C6931	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C6932-35	F1L2E105A013	E 0.10UF, 25V	4	
C6951	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C6952	TCUY1C105ZFN	C 1UF, 16V	1	
C6954	TCUY1C105ZFN	C 1UF, 16V	1	
C6956	TCUY1C105ZFN	C 1UF, 16V	1	
C6958	TCUY1C105ZFN	C 1UF, 16V	1	
C6960	TCUY1C105ZFN	C 1UF, 16V	1	
C6962	TCUY1C105ZFN	C 1UF, 16V	1	
C6964-68	ECJ2XB1H221K	C 220PF, K, 50V	5	
C6981	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C6982-85	F1L2E105A013	E 0.10UF, 25V	4	
C7108	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7110	TCUY1C105ZFN	C 1UF, 16V	1	
C7111,12	ECJ3XB2A474K	C 0.47UF, 6.3V	2	
C7114	TCUY1C105ZFN	C 1UF, 16V	1	
C7115	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7116	TCUY1C105ZFN	C 1UF, 16V	1	
C7117	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7119	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7121	TCUY1C105ZFN	C 1UF, 16V	1	
C7122	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7123	TCUY1C105ZFN	C 1UF, 16V	1	
C7124	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7126	TCUY1C105ZFN	C 1UF, 16V	1	
C7127	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7130	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7134	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7137,38	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C7140	TCUY1C105ZFN	C 1UF, 16V	1	
C7141	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7143	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7145	TCUY1C105ZFN	C 1UF, 16V	1	
C7146	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7148	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7201	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7203	TCUY1C105ZFN	C 1UF, 16V	1	
C7204,05	ECJ3XB2A474K	C 0.47UF, 6.3V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C7207	TCUY1C105ZFN	C 1UF, 16V	1	
C7208	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7209	TCUY1C105ZFN	C 1UF, 16V	1	
C7210	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7212	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7214	TCUY1C105ZFN	C 1UF, 16V	1	
C7215	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7216	TCUY1C105ZFN	C 1UF, 16V	1	
C7217	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7219	TCUY1C105ZFN	C 1UF, 16V	1	
C7220	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7223	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7225	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7227	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7229	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7235	TCUY1C105ZFN	C 1UF, 16V	1	
C7236	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7238	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7240	TCUY1C105ZFN	C 1UF, 16V	1	
C7241	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7244	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C8003	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C8005	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C8007	ECJ1XC1H101J	C 100PF, J, 50V	1	
C8009	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C8013	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C8015	ECJ3YF1A106Z	C 10UF, Z, 10V	1	
C8016	ECJ3YB1A475K	C 0.047UF, K, 10V	1	
C8019	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C8021	ECJ3VB1C474K	C 0.47UF, K, 16V	1	
C8023	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C8025	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C8027	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C8029	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C8030	EEHBC1C470P	C 47PF, J, 16V	1	
C8033	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C8035	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C8036	ECJ1XC1H101J	C 100PF, J, 50V	1	
C8038	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C8045	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C8049	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C8051	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C8070	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C8072,7	ECJ3YF1A106Z	C 10UF, Z, 10V	2	
C8074,7	ECJ1XC1H102J	C 1000PF, J, 50V	2	
C8080-83	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C8084	TCUY1C105ZFN	C 1UF, 16V	1	
C8100	EEHBC1C470P	C 47PF, J, 16V	1	
C8101	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C8102,0	EEHBC1C470P	C 47PF, J, 16V	2	
C8106	EEHBC1C470P	C 47PF, J, 16V	1	
C8107	EEVHB1C471	E 470UF, 16V	1	
C8108,0	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C8111-13	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C8114	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C8115	EEHBC1C470P	C 47PF, J, 16V	1	
C8116	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C8120	F2H1E471A010	E 470UF, 25V	1	PAVCA
C8121	ECJ3YF1E225Z	C 2.2UF, Z, 25V	1	PAVCA
C8122	EEHBC1C470P	C 47PF, J, 16V	1	
C8123	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C8181,8	ECJ1XC1H150J	C 15PF, J, 50V	2	
C8183	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C8185	EECS5R5H155	E 1.5UF, 5.5V	1	
C8200	EEHBC1C470P	C 47PF, J, 16V	1	
C9028,2	FLJ0J1060004	C 0.010UF, K, 16V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9033,3	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
4				
C9035,3	FLJ0J1060004	C 0.010UF, K, 16V	2	
6				
C9037	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C9039	FLJ0J1060004	C 0.010UF, K, 16V	1	
C9040	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9044-53	ECJ1XF1C104Z	C 0.1UF, Z, 16V	10	
C9055-57	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9058	FLJ0J1060004	C 0.010UF, K, 16V	1	
C9060	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9467,6	ECJ1VF1H103Z	C 0.010UF, Z, 50V	2	
8				
C9469	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9500-06	ECJ1XB1C104K	C 0.1UF, Z, 16V	7	
C9508	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9509	ECJ1VC1H200J	C 20PF, C, 50V	1	
C9510	ECJ1XC1H150J	C 15PF, J, 50V	1	
C9511	FLJ0J1060004	C 0.010UF, K, 16V	1	
C9512	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9514,1	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
5				
C9516-25	ECJ1XB1C104K	C 0.1UF, Z, 16V	10	
C9526	FLJ0J1060004	C 0.010UF, K, 16V	1	
C9527-30	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C9531	FLJ0J1060004	C 0.010UF, K, 16V	1	
C9800	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9801	ECJ1VB1H472K	C 4700PF, K, 50V	1	
C9802	ECJ1XC1H470J	C 47PF, J, 50V	1	
C9803	ECJ1VB1H472K	C 4700PF, K, 50V	1	
C9804	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9805	ECJ1VB0J475K	C 4.7UF, K, 6.3V	1	
C9806	ECGRL0G680ER	C 68PF, J, 4V	1	
C9807,0	ECJ3YB1E106M	C 10 UF, K, 25V	2	
8				
C9809	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9815,1	ECGRL0G680ER	C 68PF, J, 4V	2	
6				
C9817,1	ECJ3YB1E106M	C 10 UF, K, 25V	2	
8				
C9822	FLJ0J1060004	C 0.010UF, K, 16V	1	
C9823,2	ECJ3YB1E106M	C 10 UF, K, 25V	2	
4				
C9825	ECJ1XC1H101K	C 100PF, K, 50V	1	
C9826	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9827	FLJ0J1060004	C 0.010UF, K, 16V	1	
C9830-32	ECJ3XB1C106M	C 1.0UF, K, 16V	3	
C9833	ECJ3YB1E106M	C 10 UF, K, 25V	1	
C9837	ECJ3XB1C106M	C 1.0UF, K, 16V	1	
C9838	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9839	ECJ3YB1E106M	C 10 UF, K, 25V	1	
C9840	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9841,4	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
2				
C9843	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9844	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C9845,4	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
6				
C9847,4	ECJ1VB1E104K	C 0.10UF, K, 25V	2	
8				
C9880,8	ECJ1XB1H102K	C 1000UF, Z, 50V	2	
1				
C9882	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9883	ECJ1VB1H822K	C 8200PF, K, 50V	1	
C9884	ECJ1VC1H100C	C 10PF, C, 50V	1	
C9885	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C9886	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9887	ECJ1VB0J475K	C 4.7UF, K, 6.3V	1	
C9891	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9896	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9897	ECJ1VB1H822K	C 8200PF, K, 50V	1	
C9898	ECJ1VC1H100C	C 10PF, C, 50V	1	
C9899	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C9900-51	ECJ1XB1C104K	C 0.1UF, Z, 16V	52	
C9952-54	EEFCD0G560ER	56UF,	3	
C9955-59	ECJ1XB1C104K	C 0.1UF, Z, 16V	5	
C9960-64	ECJ3XB0J106M	C 10UF, M, 6.3V	5	
C9965	EEFCD0G560ER	56UF,	1	
C9966	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9967	ECJ1VB0J475K	C 4.7UF, K, 6.3V	1	
C9971	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
CB1-B8	K1MN68BA0002	68P CONNECTOR	8	
D3	K1KY40B00003	40P CONNECTOR	1	
D5	K1KB31BA0064	31P CONNECTOR	1	
D6	K1KA21A00011	21P CONNECTOR	1	
D20	K1KA20BA0296	20P CONNECTOR	1	
D25	K1KA20B00155	20P CONNECTOR	1	
D31,32	K1MN55BA0094	55P CONNECTOR	2	
D401	B0FBAT000006	DIODE	1	△
D404	B0EBKT000007	DIODE	1	△
D407	MA111	DIODE	1	
D411	B0BB17000009	DIODE	1	
D412	B0HAMM000122	DIODE	1	
D415	B0JAME000099	DIODE	1	
D416	B0HAMP000067	DIODE	1	
D417	B0HAPR000013	DIODE	1	
D418	B0BC8R100013	DIODE	1	
D419,20	B0HAPR000013	DIODE	2	
D423	MA188	DIODE	1	
D425	MA188	DIODE	1	
D429	ERA15-10	DIODE	1	
D430	MA111	DIODE	1	
D431,32	B0JCDD000002	DIODE	2	
D433	B0BC01400033	DIODE	1	
D435	ERA15-10	DIODE	1	
D436-38	MA4200M	ZENER DIODE	3	
D441	B0HAMM000122	DIODE	1	
D444	B0HAMM000122	DIODE	1	
D445	MA4360H	ZENER DIODE	1	
D501	B0HAPR000012	DIODE	1	
D503,04	MA165	DIODE	2	
D505	B0JAME000099	DIODE	1	
D506	MAZ80470LL	ZENER DIODE	1	
D507,08	B0BC7R400023	DIODE	2	
D509	B0JANG000018	DIODE	1	
D511	B0JAML000011	DIODE	1	
D512,13	MA111	DIODE	2	
D514	B0BC6R100025	DIODE	1	
D515	B0BC3R200008	DIODE	1	
D516-18	MA4330M	ZENER DIODE	3	
D520	MA111	DIODE	1	
D521	B0JAME000099	DIODE	1	
D528,29	MA153	DIODE	2	
D530	B0BC9R900013	DIODE	1	
D531	B0HBSN000013	DIODE	1	
D535	MA188	DIODE	1	
D536	B0JBSG000026	DIODE	1	
D538	B0BC5R100039	DIODE	1	
D539,40	B0AARR000010	DIODE	2	
D542	MA4200M	ZENER DIODE	1	
D543	B0BC01400033	DIODE	1	
D544,45	MA4200M	ZENER DIODE	2	
D549	B0BC02500008	DIODE	1	
D551	B0BC01300033	DIODE	1	
D555	B0BC7R400023	DIODE	1	
D559	B0BC7R400023	DIODE	1	
D563	B0BC6R100025	DIODE	1	
D569-72	B0BC02500008	DIODE	4	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D574	MA165	DIODE	1	
D575	MA188	DIODE	1	
D579	MA165	DIODE	1	
D582	MAZ705600F	ZENER DIODE	1	
D585	B0BC7R400023	DIODE	1	
D586	B0HAMP000067	DIODE	1	
D587	MA188	DIODE	1	
D588	B0BC3R200008	DIODE	1	
D590	B0BC3R200008	DIODE	1	
D596	ERA15-10	DIODE	1	
D598	B0BC5R100039	DIODE	1	
D599	B0JCND000009	DIODE	1	
D600	B0BC7R400023	DIODE	1	
D601	B0BC5R100039	DIODE	1	
D602	B0BC8R100013	DIODE	1	
D801	B0JCPD000026	DIODE	1	
D802,03	B0JCME000037	DIODE	2	
D805-10	B0JCPE000004	DIODE	6	
D850	MA165	DIODE	1	
D852	MA165	DIODE	1	
D854	MA165	DIODE	1	
D859	AK04	DIODE	1	
D2301-03	B0JCME000037	DIODE	3	
D2512	MA8043LTX	ZENER DIODE	1	
D2520	LNJ107W5FRW	LED	1	
D2524	MA8056-M	ZENER DIODE	1	
D3001	MA111	DIODE	1	
D3003,04	MA111	DIODE	2	
D3005	LNJ206R5ARA	LED	1	
D3007,08	MA111	DIODE	2	
D3061	MA728	DIODE	1	
D3501-04	MA3056M	ZENER DIODE	4	
D3507-10	MA8160H	ZENER DIODE	4	
D4701	MA728	DIODE	1	
D4704	MA3033	ZENER DIODE	1	
D4709	MA728	DIODE	1	
D4711-13	MA152K	DIODE	3	
D4721	MA3036H	ZENER DIODE	1	
D4732-35	MA152K	DIODE	4	
D4901	B0JCME000037	DIODE	1	
D4902,03	B0JCDD000002	DIODE	2	
D4904	B0JCME000037	DIODE	1	
D4905	B0JCDD000002	DIODE	1	
D4906	B0JCME000037	DIODE	1	
D6001	B0HBSN000008	DIODE	1	
D6021	B0HBSN000008	DIODE	1	
D6032	MA111	DIODE	1	
D6041	B0ECHP000003	DIODE	1	
D6051	B0ECHP000003	DIODE	1	
D6061,62	B0HBSN000008	DIODE	2	
D6071,72	B0HBSN000008	DIODE	2	
D6081,82	B0HBSN000008	DIODE	2	
D6091	B0HBSN000008	DIODE	1	
D6092	B0ECHP000003	DIODE	1	
D6101-04	B0JCME000037	DIODE	4	
D6131,32	B0ECHP000003	DIODE	2	
D6151-54	B0ECHP000003	DIODE	4	
D6191-93	B0ECHP000003	DIODE	3	
D6211	B0JCME000037	DIODE	1	
D6221	B0ECHP000003	DIODE	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D6222,23	MA111	DIODE	2	
D6251,52	MA8330M	ZENER DIODE	2	
D6253	LNJ301MPUJA	LED	1	
D6254	MA8051L	ZENER DIODE	1	
D6255	MA111	DIODE	1	
D6401	BOHBSN000008	DIODE	1	
D6431,32	BOHBSP000019	DIODE	2	
D6441	BOECHP000003	DIODE	1	
D6451	BOECHP000003	DIODE	1	
D6461,62	BOHBSN000008	DIODE	2	
D6466	MA111	DIODE	1	
D6471	BOHBSN000008	DIODE	1	
D6472	BOECHP000003	DIODE	1	
D6477	MA111	DIODE	1	
D6478	BOHCKS000002	DIODE	1	
D6480	MA111	DIODE	1	
D6481,82	BOHBSN000008	DIODE	2	
D6491	BOHBSP000019	DIODE	1	
D6497	MA111	DIODE	1	
D6501,02	BOECHP000003	DIODE	2	
D6521-24	BOECHP000003	DIODE	4	
D6581,82	MA8330M	ZENER DIODE	2	
D6583	LNJ301MPUJA	LED	1	
D6584	MA8051L	ZENER DIODE	1	
D6585	MA111	DIODE	1	
D6601	MA8240M	ZENER DIODE	1	
D6602	BOECHP000003	DIODE	1	
D6603	MA8240M	ZENER DIODE	1	
D6604	MA111	DIODE	1	
D6605	MA8051L	ZENER DIODE	1	
D6606	BOHCMM000014	DIODE	1	
D6607	MA111	DIODE	1	
D6610	MAZ81500ML	ZENER DIODE	1	
D6611-14	MA111	DIODE	4	
D6619,20	BOHCKS000002	DIODE	2	
D6621	BOHDSM000005	DIODE	1	
D6623,24	BOHDSM000005	DIODE	2	
D6641,42	BOHCKS000002	DIODE	2	
D6643	MA111	DIODE	1	
D6644	BOHCKS000002	DIODE	1	
D6661	MA111	DIODE	1	
D6662-64	MA8330M	ZENER DIODE	3	
D6665	MA8051L	ZENER DIODE	1	
D6666,67	MA111	DIODE	2	
D6671	MA111	DIODE	1	
D6682	BOHCMM000014	DIODE	1	
D6683,84	MA111	DIODE	2	
D6686,87	MA111	DIODE	2	
D6701,02	MA8056H	ZENER DIODE	2	
D6721	BOHCKS000002	DIODE	1	
D6723,24	BOJCME000037	DIODE	2	
D6725	BOECHP000003	DIODE	1	
D6726-33	MA8056H	ZENER DIODE	8	
D6734	MA111	DIODE	1	
D6752	BOJCME000037	DIODE	1	
D6758	BOECHP000003	DIODE	1	
D6760,61	MA111	DIODE	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D6771	BOJCME000037	DIODE	1	
D6773	BOHCKS000002	DIODE	1	
D6791	MA8200M	ZENER DIODE	1	
D6801,02	BOJCME000037	DIODE	2	
D6803	MA111	DIODE	1	
D6804	BOECHP000003	DIODE	1	
D6805	MA111	DIODE	1	
D6806	BOECHP000003	DIODE	1	
D6820-23	MA111	DIODE	4	
D6825	MA8330M	ZENER DIODE	1	
D6826	MA111	DIODE	1	
D6841	BOECHP000003	DIODE	1	
D6842,43	MA111	DIODE	2	
D6859	BOECHP000003	DIODE	1	
D6860	BOHCKS000002	DIODE	1	
D6861	MA8051L	ZENER DIODE	1	
D6862	MA111	DIODE	1	
D6871	MA8051L	ZENER DIODE	1	
D6872	MA111	DIODE	1	
D6901,02	MA8056H	ZENER DIODE	2	
D6903,04	BOECHP000003	DIODE	2	
D6951,52	MA8056H	ZENER DIODE	2	
D6953,54	BOECHP000003	DIODE	2	
D8001	MA111	DIODE	1	
D8003	MA111	DIODE	1	
D8010,11	MA153	DIODE	2	
D8180	MA111	DIODE	1	
D8181	MA8056-M	ZENER DIODE	1	
D8184,85	MA8056-M	ZENER DIODE	2	
D8200	MAZ31600ML	ZENER DIODE	1	
D8201	MA111	DIODE	1	
D8203	MA3100M	ZENER DIODE	1	
D8204	MA111	DIODE	1	
D8209	MA111	DIODE	1	
D9017-19	MA3033	ZENER DIODE	3	
D9020	MA728	DIODE	1	
D9100-03	BOJCGD000002	DIODE	4	
D9105,06	BOJCGD000002	DIODE	2	
D9110	BOJCGD000002	DIODE	1	
D9300,01	MA152K	DIODE	2	
D9800	BOJCME000037	DIODE	1	
D9801	BOJCDD000002	DIODE	1	
D9802	MA728	DIODE	1	
D9804	MA152K	DIODE	1	
D9807,08	MA152K	DIODE	2	
D9811	MA728	DIODE	1	
D9812	BOJCME000037	DIODE	1	
D9813	BOJCDD000002	DIODE	1	
D9814	BOJCME000037	DIODE	1	
D9815	BOJCDD000002	DIODE	1	
DA1	K1KA20AA0335	20P CONNECTOR	1	
DA2	K1KY40B00003	40P CONNECTOR	1	
DA3	K1KA30AA0009	30P CONNECTOR	1	
DA4	K1KA14A00248	14P CONNECTOR	1	
DA5	K1KB21BA0063	21P CONNECTOR	1	
DA6	K1KA31A00007	31P CONNECTOR	1	
DA11	K1KA21A00011	21P CONNECTOR	1	
FL3000-04	F1J1E1040022	C 0.10UF, Z, 25V	5	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
FL3006-08	F1J1E1040022	C 0.10UF, Z, 25V	3	
FL3010	F1J1E1040022	C 0.10UF, Z, 25V	1	
FL4001	JOMAB0000175	LC FILTER	1	
FL4502-04	F1J1E1040022	C 0.10UF, Z, 25V	3	
FL4703	F1J1E1040022	C 0.10UF, Z, 25V	1	
FL4705-09	F1J1E1040022	C 0.10UF, Z, 25V	5	
FL7101	J0HABH000013	LC FILTER	1	
FL7201	J0HABH000013	LC FILTER	1	
FL8000	F1J1E1040022	C 0.10UF, Z, 25V	1	
FL9300, 01	F1J1E1040022	C 0.10UF, Z, 25V	2	
FL9800, 01	J0HABH000013	LC FILTER	2	
FL9803, 04	J0HABH000012	LC FILTER	2	
FL9805-07	J0HABH000013	LC FILTER	3	
FL9900-02	F1J1E1040022	C 0.10UF, Z, 25V	3	
FL9903, 04	J0HABH000013	LC FILTER	2	
GK3	K1KA03BA0061	3P CONNECTOR	1	
HX1	K1KB22A00036	22P CONNECTOR	1	
IC401	CNC1S171R	IC	1	△
IC402	C0DAEMB00004	IC	1	
IC403-05	CNC1S171R	IC	3	△
IC406	C0DAZZZ00021	IC	1	
IC408	CNC1S171R	IC	1	△
IC409	MIP2G40MPSCF	IC	1	△
IC410	CNC1S171R	IC	1	△
IC411	C0DAEMB00004	IC	1	
IC412	CNC1S171R	IC	1	△
IC501	C2ABDB000110	IC	1	
IC502	C0EBH0000210	IC	1	
IC504	C0DAEMB00004	IC	1	
IC505	CNC1S171R	IC	1	
IC506	C0ZBZ0000878	IC	1	
IC507	CNC1S171R	IC	1	
IC509	C0DABZZ00010	IC	1	
IC510	C0DBAZG00034	IC	1	
IC512	C0DAEMB00004	IC	1	
IC520	LSSK0062	IC	1	
IC801-03	C0DBAMH00013	IC	3	
IC804	C0CBCAC00275	IC	1	
IC850	C0DAAZG00014	IC	1	
IC2301, 02	C1AB00002534	IC	2	PAVCA
IC2303	C1BB00001006	IC	1	
IC2305	C0ABBA000168	IC	1	
IC3001	C1AB00002530	IC	1	PAVCA
IC3002	C0JBBR000002	IC	1	
IC3003	CXA1315M	LINEAR IC	1	
IC3004	CXA1875AM	LINEAR IC	1	
IC3005	C1AB00002529	IC	1	PAVCA
IC3006	MC14052BF	MOS IC (CMOS GATE ARRLY)	1	
IC3007, 08	C0JBAS000215	IC	2	
IC3101	C1AB00002238	IC	1	
IC3150-52	C0JBAA000419	IC	3	
IC3502	C3EBCC000068	IC	1	PAVCA
IC4001	C0FBAY000012	IC	1	PAVCA
IC4002	C0DBEGE00002	IC	1	
IC4031, 32	C0JBAE000354	IC	2	
IC4201	C1ZBZ0003233	IC	1	PAVCA
IC4301	C0JBAP000020	IC	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC4500	C1ZBZ0002769	IC	1	
IC4501	MN845111-A	IC	1	
IC4502	C3ABQJ000031	IC	1	
IC4671	C0ZBZ0001410	IC	1	PAVCA
IC4701	MN103SB30RGL	IC	1	PAVCA
IC4702	TVRN928	16M FLASH MEMORY (3.3V T	1	PAVCA
IC4703	C3EBJC000059	IC	1	
IC4704	C0EBE0000447	IC	1	
IC4711	C0JBAA000354	IC	1	
IC4714	C0JBAZ0000856	IC	1	
IC4715	C0JBAE000354	IC	1	
IC4803	C0JBAS000215	IC	1	
IC4901	C0DBAHD00011	IC	1	
IC4951, 52	C0DBAYY000054	IC	2	
IC4953	C0CBCAD00016	IC	1	
IC4955	C0DBAYY000054	IC	1	
IC4956	C0CBCBC00190	IC	1	
IC4957	C0DBAHD00011	IC	1	
IC6131	C0ZBZ0000895	IC	1	
IC6151	C0ZBZ0001324	IC	1	
IC6191	C0ZBZ0000895	IC	1	
IC6211	C0ZBZ0001325	IC	1	
IC6221	C0DBEMB00005	IC	1	
IC6241	C0JBAZ000005	IC	1	
IC6251	NJM2903M	INTEGRATED CIRCUIT	1	
IC6471	C0DBEKA00003	IC	1	
IC6472	C0JBAA000377	IC	1	
IC6501	C0ZBZ0000895	IC	1	
IC6521	C0ZBZ0001324	IC	1	
IC6561, 62	C0JBAZ000005	IC	2	
IC6581	NJM2903M	INTEGRATED CIRCUIT	1	
IC6601	C0ZBZ0001325	IC	1	
IC6602	C0JBAB000715	IC	1	
IC6610	NJM2903M	INTEGRATED CIRCUIT	1	
IC6671	C0ZBZ0001325	IC	1	
IC6681	C0ZBZ0001325	IC	1	
IC6682	C0JBAA000377	IC	1	
IC6721, 22	C0JBAA000994	IC	2	
IC6724, 25	C0CBADC00089	IC	2	
IC6751	C0CBADC00089	IC	1	
IC6752	C0ZBZ0001325	IC	1	
IC6753	C0JBAB000715	IC	1	
IC6771	C0CBADC00089	IC	1	
IC6772	C0ZBZ0001325	IC	1	
IC6773, 74	C0JBAA000377	IC	2	
IC6791	N0BF1FB00001	IC	1	
IC6801, 02	C0DBEMB00005	IC	2	
IC6821	C0DBEMB00005	IC	1	
IC6841	C0DBEMB00005	IC	1	
IC6861	NJM2903M	INTEGRATED CIRCUIT	1	
IC6871	NJM2903M	INTEGRATED CIRCUIT	1	
IC6901-06	AN16072A-VT	IC	6	
IC6951-56	AN16072A-VT	IC	6	
IC7101-05	C0JBAA001120	IC	5	
IC7201-05	C0JBAA001120	IC	5	
IC8001	MC14052BF	MOS IC (CMOS GATE ARRLY)	1	
IC8003	C1AA00000706	IC	1	
IC8005	C0JBAB000646	IC	1	
IC8007	C0JBAA000419	IC	1	
IC8009	C0JBAS000215	IC	1	
IC8014	C0ZBZ0000911	IC	1	
IC8016	C0JBAA001934	IC	1	
IC8100	C0DBEJG00001	IC	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC8181	C1DB00001208	IC	1	
IC9001	TVRP015	IC	1	PAVCA
IC9002	C0ZBZ0001330	IC	1	
IC9003	TVRN992	IC	1	
IC9007	TVRP012	IC	1	PAVCA
IC9011	C0EBF0000431	IC	1	
IC9200	C1ZBZ0003185	IC	1	
IC9303	TVRN820S	IC	1	PAVCA
IC9500	C1ZBZ0002599	IC	1	
IC9502	PST9128NR	IC (LOGIC)	1	
IC9503, 04	C0JBAZ001120	IC	2	
IC9800	C0DBAYY00054	IC	1	
IC9801	C0DBZFG00066	IC	1	
IC9802, 03	C0JBAZ001120	IC	2	
IC9806	C0DBAHD00011	IC	1	
IC9807	C0DBAYY00054	IC	1	
IC9809	C0DBAYY00054	IC	1	
IC9900	MN84521-A	IC	1	
IC9901	C3ABQJ000051	IC	1	
J1	K1KA20B00163	20P CONNECTOR	1	PAVCA
J2	K1KA06BA0047	6P CONNECTOR	1	
J3	K1KA30B00078	30P CONNECTOR	1	PAVCA
J4	K1KA11BA0051	11P CONNECTOR	1	
J5	K1KA21B00008	21P CONNECTOR	1	
J6	K1KA21B00009	21P CONNECTOR	1	
J7,J8	K1KA03BA0055	3P CONNECTOR	2	
J10	K1KA06BA0050	6P CONNECTOR	1	
J11-13	K1KB80B00024	80P CONNECTOR	3	
J14	K1KA22A00067	22P CONNECTOR	1	
J15	K1KA03BA0047	3P CONNECTOR	1	
J30	K1KA05BA0050	5P CONNECTOR	1	PAVCA
JK3509	K1FB109BA018	CONNECTOR	1	
JK3511	K1FB115BA020	CONNECTOR	1	
JK3513	K2HC103B0105	JACK	1	
JS8094	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS8096	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
K1	K1KY12B00001	12P CONNECTOR	1	
L403	EXCELSA35	BEAD CHOKE	1	
L404,05	G0B123K00004	CHOKE COIL	2	△
L410	ELF17N004A	LINE FILTER	1	△
L510	EXCELDLR25C	BEAD CHOKE	1	
L511	G0A470ZA0033	CHOKE COIL	1	
L512	ELESE4R7JA	PEAKING COIL	1	
L513	EXCELDLR25C	BEAD CHOKE	1	
L514	G0A100GA0013	CHOKE COIL	1	
L801	G1A101ZA0007	CHOKE COIL	1	PAVCA
L802	G1C101MA0167	INDUCTION COIL	1	PAVCA
L803	G1C220MA0167	INDUCTION COIL	1	PAVCA
L804,05	J0JHC0000078	CHIP INDUCTOR	2	
L807-11	J0JHC0000078	CHIP INDUCTOR	5	
L851	G0A680ZA0047	CHOKE COIL	1	
L2330,3 1	G0A221ZA0041	CHOKE COIL	2	
L3002	G1C100K00020	INDUCTION COIL	1	
L3005,0 6	G1C100K00020	INDUCTION COIL	2	
L3050	G1C100K00020	INDUCTION COIL	1	
L3140	J0JHC0000078	CHIP INDUCTOR	1	
L3507-09	J0HABB000004	LC FILTER	3	
L3510-17	TLK212T256AL	EMI FILTER	8	
L3526	ELJPA100KFB	CHIP INDUCTOR	1	
L3555	ELJPA100KFB	CHIP INDUCTOR	1	
L4206	J0JHC0000096	CHIP INDUCTOR	1	
L4301-03	J0JHC0000078	CHIP INDUCTOR	3	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L4501	G1C150KA0038	INDUCTION COIL	1	
L4502-05	J0JHC0000096	CHIP INDUCTOR	4	
L4671	G1C150KA0038	INDUCTION COIL	1	
L4701-04	J0JHC0000096	CHIP INDUCTOR	4	
L4901	G1C3R3MA0175	INDUCTION COIL	1	PAVCA
L4902	G1C3R0MA0248	INDUCTION COIL	1	
L4903	G1C2R2MA0248	INDUCTION COIL	1	PAVCA
L6001-03	G0C2R2ZA0024	PEAKING COIL	3	
L6011-13	G0C2R2KA0151	PEAKING COIL	3	
L6061-68	G0ZZ00002183	PEAKING COIL	8	
L6081-88	G0ZZ00002183	PEAKING COIL	8	
L6101,0 2	J0JJC0000011	CHIP INDUCTOR	2	
L6103	G0ZZ00002183	PEAKING COIL	1	
L6104,0 5	J0JJC0000011	CHIP INDUCTOR	2	
L6211,1 2	J0JJC0000011	CHIP INDUCTOR	2	
L6221	G0ZZ00002183	PEAKING COIL	1	
L6241	G0ZZ00002183	PEAKING COIL	1	
L6262	G0ZZ00002183	PEAKING COIL	1	
L6271,7 2	G0ZZ00002183	PEAKING COIL	2	
L6401-03	G0C2R2ZA0024	PEAKING COIL	3	
L6411-13	G0C2R2KA0151	PEAKING COIL	3	
L6461-68	G0ZZ00002183	PEAKING COIL	8	
L6472,7 3	G0ZZ00002183	PEAKING COIL	2	
L6481-88	G0ZZ00002183	PEAKING COIL	8	
L6591,9 2	G0ZZ00002183	PEAKING COIL	2	
L6601,0 2	G0ZZ00002183	PEAKING COIL	2	
L6801,0 2	J0JJC0000011	CHIP INDUCTOR	2	
L6841	J0JJC0000011	CHIP INDUCTOR	1	
L8001	G1C100K00020	INDUCTION COIL	1	
L8003	G1C100K00020	INDUCTION COIL	1	
L8005	G1C100K00020	INDUCTION COIL	1	
L8101-08	J0JHC0000078	CHIP INDUCTOR	8	
L9500	G1C150KA0038	INDUCTION COIL	1	
L9501,0 2	J0JHC0000078	CHIP INDUCTOR	2	
L9800	G1C3R0MA0248	INDUCTION COIL	1	
L9801,0 2	G1C2R2MA0241	INDUCTION COIL	2	
L9810	J0JHC0000045	CHIP INDUCTOR	1	
P2	K1KA02A00626	2P CONNECTOR	1	
P5	K1KA11AA0194	11P CONNECTOR	1	
P9	K1KA03A00537	3P CONNECTOR	1	
P10	K1KA06A00452	6P CONNECTOR	1	
P11	K1KA02A00626	2P CONNECTOR	1	
P12	K1KA10AA0194	10P CONNECTOR	1	
P23	K1KA03AA0193	3P CONNECTOR	1	
P25	K1KA20AA0178	20P CONNECTOR	1	
PA4901	K5H4022A0023	FUSE	1	
PA9800	K5H4022A0023	FUSE	1	
PB30	K1KA05AA0193	5P CONNECTOR	1	
PB31	K1KA03AA0192	3P CONNECTOR	1	
PB33	K1KA03AA0192	3P CONNECTOR	1	
PB35	K1KA03AA0192	3P CONNECTOR	1	
PC6480	B3PBA0000223	IC	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
PC6701-03	B3PBA0000233	IC	3	
PC6704	B3PBA0000234	IC	1	
PC6705	B3PBA0000233	IC	1	
PC6760	B3PBA0000223	IC	1	
PC6801	B3PBA0000223	IC	1	
PC6861	B3PBA0000223	IC	1	
PC6871	B3PBA0000223	IC	1	
PMM1	TMM7464-2	CLAMPER	1	
PMM2,M3	TMME088	CLAMPER	2	
PMM4-M6	TMM7464-2	CLAMPER	3	
PMM7	TMME047	CLAMPER	1	
PR401	K5Y502BA0001	FUSE	1	△
PR505	K5H5022A0023	FUSE	1	△
PR509	ERBSE0R50U	FUSE	1	△
PR601	K5G312B00012	FUSE	1	△
Q401	B1CHND000004	TRANSISTOR	1	
Q402	B1DFDD000019	TRANSISTOR	1	
Q404	B1BCCF000022	TRANSISTOR	1	
Q406	B1DEKQ000003	TRANSISTOR	1	△
Q407	B1HFCFA00021	TRANSISTOR	1	
Q408,09	B1DHCD000034	TRANSISTOR	2	
Q412,13	B1DEGQ000070	TRANSISTOR	2	△
Q418	2SD1819A	TRANSISTOR	1	
Q420-22	2SD1819A	TRANSISTOR	3	
Q434	B1CEJQ000003	TRANSISTOR	1	
Q501,02	2SD1820A	TRANSISTOR	2	
Q505	B1CEJQ000002	TRANSISTOR	1	
Q507	B1DAGQ000013	TRANSISTOR	1	
Q508	B1HBCFA00033	TRANSISTOR	1	
Q509	B1HDCEA00001	TRANSISTOR	1	
Q510	B1DHBD000005	TRANSISTOR	1	
Q512	B1CBGD000001	FET	1	
Q517	B1HBCFA00033	TRANSISTOR	1	
Q520	B1HBCFA00033	TRANSISTOR	1	
Q521	B1CBGD000001	FET	1	
Q524	B1CFGF000008	TRANSISTOR	1	
Q525	B1CBGD000001	FET	1	
Q527	B1CERL000005	TRANSISTOR	1	
Q530	2SD1819A	TRANSISTOR	1	
Q535	2SD1819A	TRANSISTOR	1	
Q537	B1DFDD000019	TRANSISTOR	1	
Q538	B1CBGD000001	FET	1	
Q540	B1DHCD000034	TRANSISTOR	1	
Q541	B1CBGD000001	FET	1	
Q551	B1CBGD000001	FET	1	
Q553	2SD1819A	TRANSISTOR	1	
Q554	B1DHCD000034	TRANSISTOR	1	
Q555,56	B1DFGD000045	TRANSISTOR	2	
Q557-59	2SD1819A	TRANSISTOR	3	
Q561	2SD1819A	TRANSISTOR	1	
Q563	B1CFGF000008	TRANSISTOR	1	
Q564,65	2SB1218ARL	TRANSISTOR	2	
Q566	2SD1819A	TRANSISTOR	1	
Q568	B1CHGD000006	TRANSISTOR	1	
Q569	B1CBGD000001	FET	1	
Q850	2SC3311A	TRANSISTOR	1	
Q2300	B1BBCF000028	TRANSISTOR	1	
Q2331	B1BBCF000028	TRANSISTOR	1	
Q2372	2SD601A	TRANSISTOR	1	
Q2510,11	2SD601A	TRANSISTOR	2	
Q2513	2SD601A	TRANSISTOR	1	
Q3001	2SB709A	TRANSISTOR	1	
Q3004	2SD601A	TRANSISTOR	1	
Q3531,32	2SD601A	TRANSISTOR	2	
Q4701	B1CBHD000002	FET	1	
Q4702-07	2SD601A	TRANSISTOR	6	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q4709,10	2SD601A	TRANSISTOR	2	
Q4712-14	2SD601A	TRANSISTOR	3	
Q4801	B1CBHD000002	FET	1	
Q4802,03	2SD601A	TRANSISTOR	2	
Q4901-03	B1MBEDA00015	TRANSISTOR	3	
Q4961,62	2SD601A	TRANSISTOR	2	
Q6001-03	B1JADN000001	TRANSISTOR	3	
Q6021-23	B1JADN000001	TRANSISTOR	3	
Q6041,42	B1JADN000002	TRANSISTOR	2	
Q6051,52	B1JADN000002	TRANSISTOR	2	
Q6101-04	B1DFKM000002	TRANSISTOR	4	
Q6105	B1ABNF000006	TRANSISTOR	1	
Q6106	B1ADNF000006	TRANSISTOR	1	
Q6111	2SK326800L	FET	1	
Q6112	B1DFKM000002	TRANSISTOR	1	
Q6114	B1DFKM000002	TRANSISTOR	1	
Q6141	B1ABNF000006	TRANSISTOR	1	
Q6142	B1ADNF000006	TRANSISTOR	1	
Q6146	B1ABNF000006	TRANSISTOR	1	
Q6147	B1ADNF000006	TRANSISTOR	1	
Q6171	2SD2185	TRANSISTOR	1	
Q6172	B1ADRD000001	TRANSISTOR	1	
Q6181	2SD2185	TRANSISTOR	1	
Q6182	B1ADRD000001	TRANSISTOR	1	
Q6221	2SD1263A	TRANSISTOR	1	
Q6222	2SC3063	TRANSISTOR	1	
Q6251	2SD601A	TRANSISTOR	1	
Q6401-03	B1JADN000001	TRANSISTOR	3	
Q6421-23	B1JAEP000001	TRANSISTOR	3	
Q6441,42	B1JADN000002	TRANSISTOR	2	
Q6451,52	B1JADP000002	TRANSISTOR	2	
Q6471	B1CHGD000006	TRANSISTOR	1	
Q6511	B1ABNF000006	TRANSISTOR	1	
Q6512	B1ADNF000006	TRANSISTOR	1	
Q6516	B1ABNF000006	TRANSISTOR	1	
Q6517	B1ADNF000006	TRANSISTOR	1	
Q6531	2SD2185	TRANSISTOR	1	
Q6532	B1ADRD000001	TRANSISTOR	1	
Q6551	2SD2185	TRANSISTOR	1	
Q6552	B1ADRD000001	TRANSISTOR	1	
Q6581	2SD601A	TRANSISTOR	1	
Q6601	B1DFES000003	TRANSISTOR	1	
Q6602	2SD601A	TRANSISTOR	1	
Q6621	B1DFKM000001	TRANSISTOR	1	
Q6641,42	B1DFKM000001	TRANSISTOR	2	
Q6644,45	B1DFKM000001	TRANSISTOR	2	
Q6647,48	B1DFKM000001	TRANSISTOR	2	
Q6661	B1DEET000002	TRANSISTOR	1	
Q6662	2SD601A	TRANSISTOR	1	
Q6663	2SD2185	TRANSISTOR	1	
Q6671,72	B1DFET000001	TRANSISTOR	2	
Q6680	B1ADNF000006	TRANSISTOR	1	
Q6681,82	2SK389500L	FET	2	
Q6691	2SK620	FET	1	
Q6742,43	2SD601A	TRANSISTOR	2	
Q6744	2SK620	FET	1	
Q6762	B1ADNF000006	TRANSISTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q6781	B1ABNF000006	TRANSISTOR	1	
Q6782	B1ADNF000006	TRANSISTOR	1	
Q6791	2SD601A	TRANSISTOR	1	
Q6801	B1BAEJ000014	TRANSISTOR	1	
Q6802	2SB0709A	TRANSISTOR	1	
Q6803	2SD814A	TRANSISTOR	1	
Q6804	2SD601A	TRANSISTOR	1	
Q6821	2SD1263A	TRANSISTOR	1	
Q6822	2SC3063	TRANSISTOR	1	
Q6824	2SD601A	TRANSISTOR	1	
Q6841	2SD1263A	TRANSISTOR	1	
Q6842	2SC1473A	TRANSISTOR	1	
Q8002	2SD601A	TRANSISTOR	1	
Q8010	2SD601A	TRANSISTOR	1	
Q8011	2SB709A	TRANSISTOR	1	
Q8012	2SD601A	TRANSISTOR	1	
Q8013	2SB709A	TRANSISTOR	1	
Q8019	2SD601A	TRANSISTOR	1	
Q8181-84	B1CBHD000002	FET	4	
Q8200-02	2SD601A	TRANSISTOR	3	
Q9010	2SD601A	TRANSISTOR	1	
Q9044	2SD601A	TRANSISTOR	1	
Q9046	2SD601A	TRANSISTOR	1	
Q9049	2SB709A	TRANSISTOR	1	
Q9050-54	2SD601A	TRANSISTOR	5	
Q9055-58	B1CBHD000002	FET	4	
Q9300-02	2SD601A	TRANSISTOR	3	
Q9800,01	B1MBEDA00015	TRANSISTOR	2	
Q9803	B1MBEDA00015	TRANSISTOR	1	
Q9805,06	2SD601A	TRANSISTOR	2	
R401	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R402	ERJ6GEYJ821	M 820 OHM, J, 1/10W	1	
R403	ERJ6GEYJ105	M 1MOHM, J, 1/10W	1	
R404	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R406	ERX12SJ2R2V	M 2.2 OHM, J, 1/2W	1	
R407	ERJ8ENF4303	M 43KOHM, 1/8W	1	
R410	D1F5100E0003	CHIP RESISTOR	1	△
R412	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R413	D1F5100E0003	CHIP RESISTOR	1	△
R414	ERJ8GEYJ153	M 15KOHM, J, 1/8W	1	
R415	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R416	ERJ6GEYJ305	M 3MOHM, J, 1/10W	1	
R417	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R418	ERJ6GEYJ220	M 22 OHM, J, 1/10W	1	
R419	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R420	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R421	ERJ6GEYJ333	M 33KOHM, J, 1/10W	1	
R422	ERJ6GEYJ334	M 330KOHM, J, 1/10W	1	
R423	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R424	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R425	ERJ6ENF3902	M 39KOHM, 1/10W	1	
R426	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R427	ERJ8ENF4303	M 43KOHM, 1/8W	1	
R428	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R429	ERJ6GEYJ4R7	M 4.7 OHM, J, 1/10W	1	
R430	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R431	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R432	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R433	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R434	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R435	ERJ8ENF4303	M 43KOHM, 1/8W	1	
R436	ERJ8GEYJ153	M 15KOHM, J, 1/8W	1	
R437	ERJ6GEYJ183	M 18KOHM, J, 1/10W	1	
R438	ERJ6GEYJ331	M 330 OHM, J, 1/10W	1	
R439	ERG12SJ120	M 12 OHM, J, 1/2W	1	
R440	ERJ8GEYJ474	M 470KOHM, J, 1/8W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R441,42	ERJ6EKF6803	M 680KOHM, 1/10W	2	
R443	EVMAASA00B23	CONTROL 2KOHMB	1	
R444	ERJ6GEYJ123	M 12KOHM, J, 1/10W	1	
R448, 49	D0XGR08J0001	M 0.08OHM, J, 5W	2	
R450	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R451	ERJ6GEYJ333	M 33KOHM, J, 1/10W	1	
R452	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R453	ERJ6GEYJ305	M 3MOHM, J, 1/10W	1	
R454	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R455	ERJ6GEYJ123	M 12KOHM, J, 1/10W	1	
R456	ERJ6GEYJ333	M 33KOHM, J, 1/10W	1	
R458	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R459	ERJ6EKF6803	M 680KOHM, 1/10W	1	
R461	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R462	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R463	ERJ6GEYJ333	M 33KOHM, J, 1/10W	1	
R464	ERJ6ENF3302	M 33KOHM, 1/10W	1	
R465	ERJ6ENF5603	M 560KOHM, 1/10W	1	
R467	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R471	ERJ8GEYJ332	M 3.3KOHM, J, 1/8W	1	
R472,73	ERJ6ENF5603	M 560KOHM, 1/10W	2	
R475	ERJ6EKF6803	M 680KOHM, 1/10W	1	
R476,77	ERJ14YJ181U	M 181 OHM, J, 1/4W	2	
R478	ERJ8GEYJ220	M 22 OHM, J, 1/8W	1	
R480	ERJ6ENF4702	M 47KOHM, 1/10W	1	
R482	ERJ8GEYJ220	M 22 OHM, J, 1/8W	1	
R483	D0BF225JA030	M 22MOHM, J, 0.05W	1	△
R487	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R488	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R490,91	ERJ6GEYJ473	M 47KOHM, J, 1/10W	2	
R492	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R493	ERG12SJ120	M 12 OHM, J, 1/2W	1	
R494-96	ERJ6ENF5603	M 560KOHM, 1/10W	3	
R497	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R498	ERG3SJ101	M 100 OHM, J, 3W	1	
R499	D0BF394JA029	M 390KOHM, J, 0.05W	1	△
R501	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R502,03	ERJ6GEYJ104	M 100KOHM, J, 1/10W	2	
R504	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R505	ERJ8GEYJ330	M 33 OHM, J, 1/8W	1	
R506	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R507	ERJ6GEYJ221	M 220 OHM, J, 1/10W	1	
R508	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R509-11	ERJ6GEYJ104	M 100KOHM, J, 1/10W	3	
R512	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R513,14	ERJ6GEYJ104	M 100KOHM, J, 1/10W	2	
R515,16	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R517	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R518	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R519,20	ERJ6GEYJ104	M 100KOHM, J, 1/10W	2	
R521,22	ERJ8GEYJ100	M 10 OHM, J, 1/8W	2	
R523	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R524	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R525	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R526,27	ERJ8GEYJ224	M 220KOHM, J, 1/8W	2	
R528	ERJ6GEYJ4R7	M 4.7 OHM, J, 1/10W	1	
R529	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R530	ERJ6RBD3302	M 33KOHM, F, 1/10W	1	
R532	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R533	ERJ6GEYJ163	M 16KOHM, J, 1/10W	1	
R534	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R535,36	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R537	ERJ6ENF1003	M 100KOHM, 1/10W	1	
R538	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R539	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R540,41	ERJ6GEYJ105	M 1MOHM, J, 1/10W	2	
R542	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R543	ERJ6GEYJ153	M 15KOHM, J, 1/10W	1	
R544	ERJ6GEYJ331	M 330 OHM, J, 1/10W	1	
R545	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R546	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R547	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R548	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R549	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R550	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R551	ERJ6GEYJ334	M 330KOHM,J,1/10W	1	
R552	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R553	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R554	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R555,56	ERJ6GEYJ105	M 1MOHM,J,1/10W	2	
R557	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R558	ERJ6GEYJ474	M 470KOHM,J,1/10W	1	
R559	ERJ6ENF8201	M 8.2KOHM, 1/10W	1	
R560	ERJ6ENF9101	M 9.1KOHM, 1/10W	1	
R561	ERJ6ENF5101	M 5.1KOHM, 1/10W	1	
R562	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
R563	ERJ6GEYJ2R2	M 2.2 OHM,J,1/10W	1	
R564	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R565,66	ERJ6GEYJ105	M 1MOHM,J,1/10W	2	
R567,68	ERJ8ENF1004	M 100KOHM, 1/8W	2	
R569	ERJ6ENF3302	M 33KOHM, 1/10W	1	
R570	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R571	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R572,73	ERJ8ENF3900	M 390 OHM, 1/8W	2	
R574	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R575	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R576	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R577,78	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R579	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R580,81	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R582	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R583	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R584	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R585	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R586	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R587	ERJ8RSJR16V	M 16 OHM, 1/8W	1	
R588	ERJ8ENF3900	M 390 OHM, 1/8W	1	
R589,90	ERJ8GEYJ123	M 12KOHM, J,1/8W	2	
R591	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R592	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R593	ERJ6ENF5601	M 5.6KOHM, 1/10W	1	
R594	ERJ6GEYJ151	M 150 OHM,J,1/10W	1	
R595	ERJ8GEYJ222	M 2.2KOHM, J,1/8W	1	
R596	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R597,98	ERJ6ENF3302	M 33KOHM, 1/10W	2	
R599,00	ERJ8ENF3900	M 390 OHM, 1/8W	2	
R601	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R602	ERJ6ENF3301	M 3.3KOHM, 1/10W	1	
R603	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R606	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R607	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R608	ERJ8GEYJ332	M 3.3KOHM, J,1/8W	1	
R609	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R610,11	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R612	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R613	ERJ6ENF2702	M 27KOHM, 1/10W	1	
R614	ERJ6ENF3301	M 3.3KOHM, 1/10W	1	
R615	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R616,17	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R618	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R619	ERJ8RQJR39	M0.39 OHM, 1/8W	1	
R620	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R621	ERJ8GEYJ123	M 12KOHM, J,1/8W	1	
R622	ERJ8ENF1503	M 15KOHM, 1/8W	1	
R624	ERX2SJR22	M0.22 OHM, J, 2W	1	
R626	ERJ8ENF1503	M 15KOHM, 1/8W	1	
R627	ERJ6GEYJ752	M 7.5KOHM,J,1/10W	1	
R628	EVMAASA00B33	CONTROL 3KOHMB	1	
R629	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R630	ERJ8GEYJ472	M 4.7KOHM, J,1/8W	1	
R631	ERJ8GEYJ333	M 33KOHM, J,1/8W	1	
R632	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R633	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R634	ERJ8RQJR39	M0.39 OHM, 1/8W	1	
R636	ERJ8ENF1503	M 15KOHM, 1/8W	1	
R637	ERJ8RQJR39	M0.39 OHM, 1/8W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R638	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R641	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R642-44	ERJ8RQJR39	M0.39 OHM, 1/8W	3	
R645	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R646,47	ERJ8GEYJ223	M 22KOHM, J,1/8W	2	
R648	ERJ8ENF1503	M 15KOHM, 1/8W	1	
R649	ERJ6GEYJ223	M 22KOHM, J,1/10W	1	
R650	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R651,52	ERJ6ENF1002	M 10KOHM, 1/10W	2	
R653	ERJ6ENF3302	M 33KOHM, 1/10W	1	
R654	ERJ8GEYJ220	M 22 OHM, J,1/8W	1	
R655	ERJ8RSJR16V	M 16 OHM, 1/8W	1	
R656	ERJ6ENF4702	M 47KOHM, 1/10W	1	
R657	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R658	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R659	ERJ6ENF3002	M 30KOHM, 1/10W	1	
R660	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R661	EVMEASA00B53	CONTROL 5KOHMB 0.3W	1	
R662	ERJ6ENF1503	M 150KOHM, 1/10W	1	
R664	ERJ6ENF9101	M 9.1KOHM, 1/10W	1	
R665	EVMEASA00B23	CONTROL 2KOHMB 0.3W	1	
R666	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R667,68	ERJ8GEYJ0R00	M 0 OHM, 1/8W	2	
R669	ERJ6ENF1303	M 130KOHM, 1/10W	1	
R670	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R671	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
R672,73	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R674	ERJ8GEYJ333	M 33KOHM, J,1/8W	1	
R675	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R676	ERJ8GEYJ333	M 33KOHM, J,1/8W	1	
R677	ERJ6GEYJ474	M 470KOHM,J,1/10W	1	
R678	ERJ8GEYJ0R00	M 0 OHM, 1/8W	1	
R679,80	ERJ8RSJR16V	M 16 OHM, 1/8W	2	
R682	ERJ6ENF2002	M 20KOHM, 1/10W	1	
R683	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R684	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R685,86	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R687	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R688,89	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R690	ERJ6GEYJ4R7	M 4.7 OHM,J,1/10W	1	
R691	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R692	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R693	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R695	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R696	ERJ8GEYJ100	M 10 OHM, J,1/8W	1	
R697	ERJ6GEYJ4R7	M 4.7 OHM,J,1/10W	1	
R698	ERJ8RSJR16V	M 16 OHM, 1/8W	1	
R699-08	ERJ8GEYJ105	M 1MOHM, J,1/8W	10	
R711	ERJ8RSJR16V	M 16 OHM, 1/8W	1	
R712	ERJ6GEYJ4R7	M 4.7 OHM,J,1/10W	1	
R713	ERJ8GEYJ472	M 4.7KOHM, J,1/8W	1	
R714	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R715	ERDS2TJ101	C 100 OHM, J,1/4W	1	
R802	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R803	ERJ3EKF6802	M 68KOHM, 1/16W	1	
R804	ERJ3GEYJ823	M 82KOHM,J,1/16W	1	
R805	ERJ3EKF8452	M84.5KOHM, 1/16W	1	
R806	ERJ3EKF1052	M10.5KOHM, 1/16W	1	
R810	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R811	ERJ3EKF6802	M 68KOHM, 1/16W	1	
R812	ERJ3GEYJ683	M 68KOHM,J,1/16W	1	
R813	ERJ3EKF4222	M42.2KOHM, 1/16W	1	
R814	ERJ3EKF1052	M10.5KOHM, 1/16W	1	
R818	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R819	ERJ3EKF6802	M 68KOHM, 1/16W	1	
R820	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R821	ERJ3EKF2432	M24.3KOHM, 1/16W	1	
R822	ERJ3EKF1052	M10.5KOHM, 1/16W	1	
R825-27	ERJ3GEYJ822	M 8.2KOHM,J,1/16W	3	
R828	ERJ3GEYJ0R00	M 0 OHM, 1/16W	1	
R829	ERJ6ENF1001	M 1KOHM, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R830	ERJ6ENF8451	M8.45KOHM, 1/10W	1	
R838	ERJ12YJ330	M 33 OHM, J, 1/2W	1	
R840	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R850	ER0S2CKF4701	M 4.7KOHM, F, 1/4W	1	
R851	ERDS2TJ332	C 3.3KOHM, J, 1/4W	1	
R852	ERDS2TJ473	C 47KOHM, J, 1/4W	1	
R853	ERDS2TJ471	C 470 OHM, J, 1/4W	1	
R854	ERDS2TJ122	C 1.2KOHM, J, 1/4W	1	
R856	ERDS2TJ122	C 1.2KOHM, J, 1/4W	1	
R858	ERDS2TJ122	C 1.2KOHM, J, 1/4W	1	
R862	ER0S2CHF7501	M 7.5KOHM, F, 1/4W	1	
R863	ER0S2CKF9100	M 910 OHM, F, 1/4W	1	
R921	ERJ6RBD3302	M 33KOHM, F, 1/10W	1	
R922	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R931	ERJ6ENF3002	M 30KOHM, 1/10W	1	
R932	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R933	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R935	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R936	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R937	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R938	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R939, 40	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R943	ERJ6GEYJ105	M 1MOHM, J, 1/10W	1	
R945	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R946	ERJ6GEYJ333	M 33KOHM, J, 1/10W	1	
R947	ERJ8GEYJ331	M 330 OHM, J, 1/8W	1	
R950	ERJ6GEYJ105	M 1MOHM, J, 1/10W	1	
R951, 52	ERJ8GEYJ100	M 10 OHM, J, 1/8W	2	
R953	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R955	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R956	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R2351-54	ERJ6GEYJ103	M 10KOHM, J, 1/10W	4	
R2355-60	ERDS1FJ2R2	C 2.2 OHM, J, 1/2W	6	
R2361, 62	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R2364	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2366	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2367, 68	ERJ3GEYJ560	M 56 OHM, J, 1/16W	2	
R2383	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R2384	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R2386	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R2387, 88	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R2389-92	ERJ6GEYJ103	M 10KOHM, J, 1/10W	4	
R2393	ERJ6GEYJ220	M 22 OHM, J, 1/10W	1	
R2394-96	ERJ6GEYJ103	M 10KOHM, J, 1/10W	3	
R2397	ERJ6GEYJ512	M 5.1KOHM, J, 1/10W	1	
R2398	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R2399, 00	ERJ6GEYJ220	M 22 OHM, J, 1/10W	2	
R2404-07	ERJ6GEYJ103	M 10KOHM, J, 1/10W	4	
R2408-11	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
R2412	ERJ3GEYJ122	M 1.2KOHM, J, 1/16W	1	
R2413	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2414, 15	ERJ3GEYJ122	M 1.2KOHM, J, 1/16W	2	
R2416	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2417	ERJ3GEYJ122	M 1.2KOHM, J, 1/16W	1	
R2418, 19	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R2420	ERJ3GEYJ153	M 15KOHM, J, 1/16W	1	
R2421, 22	ERJ3GEYJ273	M 27KOHM, J, 1/16W	2	
R2423	ERJ3GEYJ153	M 15KOHM, J, 1/16W	1	
R2424, 25	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R2427	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R2516	ERJ3GEYJ152	M 1.5KOHM, J, 1/16W	1	
R2517	ERJ6GEYJ470	M 47 OHM, J, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2520	ERJ3GEYJ224	M 220KOHM, J, 1/16W	1	
R2524	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R2525	ERJ3EKF9100	M 910 OHM, 1/16W	1	
R2530	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R2531	ERJ3EKF2700	M 270 OHM, 1/16W	1	
R2542	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R2556, 57	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	2	
R2558	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3001	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R3002	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R3003	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R3004	ERJ3GEYJ101	M 100 OHM, J, 1/16W	1	
R3007, 08	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R3023-25	ERJ3GEYJ101	M 100 OHM, J, 1/16W	3	
R3026-29	ERJ3GEYJ103	M 10KOHM, J, 1/16W	4	
R3030-33	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R3034-36	ERJ3GEYJ331	M 330 OHM, J, 1/16W	3	
R3037, 38	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R3039-41	ERJ3GEYJ331	M 330 OHM, J, 1/16W	3	
R3042, 43	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R3044-47	ERJ3GEYJ103	M 10KOHM, J, 1/16W	4	
R3048	ERJ3GEYJ334	M 330KOHM, J, 1/16W	1	
R3049	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R3050	ERJ3GEYJ560	M 56 OHM, J, 1/16W	1	
R3051	ERJ3GEYJ330	M 33 OHM, J, 1/16W	1	
R3053, 54	ERJ3GEYJ560	M 56 OHM, J, 1/16W	2	
R3057, 58	ERJ3GEYJ560	M 56 OHM, J, 1/16W	2	
R3059	ERJ3GEYJ101	M 100 OHM, J, 1/16W	1	
R3060	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R3061	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3062	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R3063	ERJ3GEYJ101	M 100 OHM, J, 1/16W	1	
R3064-69	ERJ6GEYJ560	M 56 OHM, J, 1/10W	6	
R3070-75	ERJ6ENF75R0	M 75 OHM, 1/10W	6	
R3076-81	ERJ6GEYJ560	M 56 OHM, J, 1/10W	6	
R3082	ERJ3GEYJ101	M 100 OHM, J, 1/16W	1	
R3083-87	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R3088-93	ERJ6ENF75R0	M 75 OHM, 1/10W	6	
R3094	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3095, 96	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	2	
R3101-06	ERJ6ENF1800	M 180 OHM, 1/10W	6	
R3107, 08	ERJ6GEYJ560	M 56 OHM, J, 1/10W	2	
R3110	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
R3111	ERJ6ENF1501	M 1.5KOHM, 1/10W	1	
R3116	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R3117	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3118	ERJ6ENF8200	M 820 OHM, 1/10W	1	
R3125	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R3126	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3134	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R3140, 41	ERJ3GEYJ473	M 47KOHM, J, 1/16W	2	
R3143, 44	ERJ3GEYJ101	M 100 OHM, J, 1/16W	2	
R3150, 51	ERJ3GEYJ101	M 100 OHM, J, 1/16W	2	
R3160, 61	ERJ3GEY0R00	M 0 OHM, 1/16W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3163	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3188-90	ERJ6ENF39R0	M 39 OHM, 1/10W	3	
R3195,96	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R3197,98	ERJ3GEYJ123	M 12KOHM,J,1/16W	2	
R3210,11	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3212-15	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	4	
R3216-19	ERJ6GEYJ3R3	M 3.3KOHM,J,1/10W	4	
R3230,31	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3400	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R3508,09	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
R3510,11	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3529,30	ERJ6GEYJ184	M 180KOHM,J,1/10W	2	
R3547,48	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3585,86	ERJ6GEYJ560	M 56 OHM,J,1/10W	2	
R3589	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R3590	ERJ6GEYJ560	M 56 OHM,J,1/10W	1	
R3591-93	ERJ6GEYJ0R00	M 0 OHM, 1/10W	3	
R3653	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R3654	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3655	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R3656	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3663,64	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R3668	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3672	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3751	ERJ6GEYF822	M 8.2KOHM,F,1/10W	1	
R3752	ERJ6GEYF222	M 2.2KOHM,F,1/10W	1	
R3753	ERJ6GEYF302	M 3.0KOHM,F,1/10W	1	PAVCA
R3754	ERJ6GEYJ0R00	M 0 OHM, 1/10W	1	
R3756	ERJ6GEYJ0R00	M 0 OHM, 1/10W	1	
R3758	ERJ6GEYF472	M 4.7KOHM,F,1/10W	1	
R3759-64	ERJ6GEYJ0R00	M 0 OHM, 1/10W	6	
R3766,67	ERJ6GEYJ0R00	M 0 OHM, 1/10W	2	
R3776,77	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3778	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R3790,91	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R4001-03	D1HG1008A002	NETWORK RESISTER	3	
R4004	ERJ6GEYJ0R00	M 0 OHM, 1/10W	1	
R4005	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4006	ERJ3EKF6801	M 6.8KOHM, 1/16W	1	
R4007	ERJ6ENF39R0	M 39 OHM, 1/10W	1	
R4008	ERJ3GEYJ0R00	M 0 OHM, 1/16W	1	
R4009	ERJ6ENF39R0	M 39 OHM, 1/10W	1	
R4010	ERJ3GEYJ0R00	M 0 OHM, 1/16W	1	
R4011	ERJ6ENF39R0	M 39 OHM, 1/10W	1	
R4012-14	ERJ3GEYJ0R00	M 0 OHM, 1/16W	3	
R4016-19	ERJ3GEYJ0R00	M 0 OHM, 1/16W	4	
R4020	ERJ6GEYJ0R00	M 0 OHM, 1/10W	1	
R4021	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R4023	ERJ6GEYJ0R00	M 0 OHM, 1/10W	1	
R4024	ERJ3GEYJ0R00	M 0 OHM, 1/16W	1	
R4025	ERJ6ENF1502	M 15KOHM, 1/10W	1	
R4026	ERJ6ENF5102	M 51KOHM, 1/10W	1	
R4027	ERJ6GEYJ0R00	M 0 OHM, 1/10W	1	
R4028	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4035-38	ERJ3GEYJ101	M 100 OHM,J,1/16W	4	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4041,42	ERJ3GEYJ0R00	M 0 OHM, 1/16W	2	
R4139	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4142	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R4144	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R4148	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R4171	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R4201	ERJ6GEYJ0R00	M 0 OHM, 1/10W	1	
R4211-20	ERJ3GEYJ101	M 100 OHM,J,1/16W	10	
R4221,22	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R4224	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4226	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4228	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4240,41	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4242,43	ERJ3GEYJ0R00	M 0 OHM, 1/16W	2	
R4244	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4245	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4249	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4250-52	ERJ3GEYJ0R00	M 0 OHM, 1/16W	3	
R4256,57	ERJ3GEYJ0R00	M 0 OHM, 1/16W	2	
R4260,61	ERJ3GEYJ0R00	M 0 OHM, 1/16W	2	
R4263,64	ERJ3GEYJ0R00	M 0 OHM, 1/16W	2	
R4271-73	D1HG8208A002	NETWORK RESISTER	3	
R4274,75	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R4276	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4277-79	D1HG1218A002	NETWORK RESISTER	3	
R4280,81	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R4282	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4312,13	ERJ3GEYJ0R00	M 0 OHM, 1/16W	2	
R4314	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4316	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4318,19	ERJ3GEYJ223	M 22KOHM,J,1/16W	2	
R4321	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R4324	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4325-27	EXB38VR000	RESISTOR ARRAY	3	
R4502	ERJ3GEYJ0R00	M 0 OHM, 1/16W	1	
R4503	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4506,07	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4509,10	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R4513	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4514-16	ERJ3GEYJ470	M 47 OHM,J,1/16W	3	
R4518	ERJ3GEYJ0R00	M 0 OHM, 1/16W	1	
R4522,23	ERJ3GEYJ0R00	M 0 OHM, 1/16W	2	
R4525,26	ERJ3GEYJ0R00	M 0 OHM, 1/16W	2	
R4528-31	ERJ3GEYJ0R00	M 0 OHM, 1/16W	4	
R4533	ERJ3GEYJ0R00	M 0 OHM, 1/16W	1	
R4536,37	ERJ3GEYJ0R00	M 0 OHM, 1/16W	2	
R4539-41	ERJ3GEYJ0R00	M 0 OHM, 1/16W	3	
R4544-47	ERJ3GEYJ0R00	M 0 OHM, 1/16W	4	
R4549	ERJ3GEYJ0R00	M 0 OHM, 1/16W	1	
R4554	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R4555-58	ERJ3GEYJ0R00	M 0 OHM, 1/16W	4	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4559,60	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R4564-67	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R4568,69	D1HG1038A002	NETWORK RESISTER	2	
R4570-72	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4573	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4574	EXB2HV680J	RESISTOR ARRAY	1	
R4575,76	ERJ3GEYJ680	M 68 OHM,J,1/16W	2	
R4577	EXB2HV680J	RESISTOR ARRAY	1	
R4578,79	ERJ6ENF1001	M 1KOHM, 1/10W	2	
R4580	ERJ6ENF1101	M 1.1KOHM, 1/10W	1	
R4581	ERJ6ENF3161	M3.16KOHM, 1/10W	1	
R4582,83	ERJ3GEYJ680	M 68 OHM,J,1/16W	2	
R4584	EXB2HV680J	RESISTOR ARRAY	1	
R4585,86	ERJ3GEYJ680	M 68 OHM,J,1/16W	2	
R4587-89	D1HG33080001	NETWORK RESISTER	3	
R4590,91	ERJ3GEYJ680	M 68 OHM,J,1/16W	2	
R4595	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
R4596	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4618-21	D1HG33080001	NETWORK RESISTER	4	
R4622	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4626,27	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4631	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4640	ERJ3GEYJ121	M 120 OHM,J,1/16W	1	
R4657,58	ERJ6ENF1001	M 1KOHM, 1/10W	2	
R4672	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4673	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4674	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4676	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4701	EXB38V103J	RESISTOR ARRAY	1	
R4702	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4703	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4704	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4706	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R4707	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4708	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4709	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4710,11	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4712,13	D1HG1008A002	NETWORK RESISTER	2	
R4715	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4716	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4717	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4718,19	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4722	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4723	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4724	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4726	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4727	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4728	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4729,30	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R4732	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4734	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4735	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4737	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4738	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4740,41	D1HG1008A002	NETWORK RESISTER	2	
R4742,43	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4745	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4746	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4747	EXB38VR000	RESISTOR ARRAY	1	
R4748-52	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R4753	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4754	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R4755	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4756	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R4757	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4758	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4759	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4760	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4761-63	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4764,65	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R4766,67	EXB2HV470JV	RESISTOR ARRAY	2	
R4768	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R4769	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4770	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R4771	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4772	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4773	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4774	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4775	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4777	ERJ3GEYJ393	M 39KOHM,J,1/16W	1	
R4778	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4779	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4780,81	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R4783	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4786	EXB38V103J	RESISTOR ARRAY	1	
R4788	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4790,91	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R4792	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4793	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R4795	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4796	ERJ3GEYJ182	M 1.8KOHM,J,1/16W	1	
R4804	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R4806	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4808	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R4812,13	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4814	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4815	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4817	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4818,19	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R4820	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4821	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4822,23	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4824	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4825	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4826	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4827	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4828	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4829	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4830	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4831	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4832	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4833	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4834	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4835	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4836	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4837	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4838	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4839	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4840	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4841,42	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R4843	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R4844	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4845	ERJ3GEYJ392	M 3.9KOHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4846	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R4847,48	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R4849	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R4850	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4851-53	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R4855	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4858	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4859	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R4860	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4863	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4864	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R4865,66	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4868	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R4869	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4870	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4872	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4873,74	ERJ3GEYJ223	M 22KOHM,J,1/16W	2	
R4876	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4877	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4879	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4880	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4881	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4883	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R4884	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4886	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R4887	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4888	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4891	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4892	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4893	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4894,95	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R4900	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4902	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4903	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4904	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4906	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4908	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R4909	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R4910	ERJ3EKF6202	M 62KOHM, 1/16W	1	
R4911-21	ERJ3GEYJ101	M 100 OHM,J,1/16W	11	
R4922,23	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4924	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4925-27	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4930	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4931	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R4932	ERJ3EKF3902	M 39KOHM, 1/16W	1	
R4933	ERJ3EKF3901	M 3.9KOHM, 1/16W	1	
R4934	ERJ3EKF3002	M 30KOHM, 1/16W	1	
R4935	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4936	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4938	ERJ3EKF1302	M 23KOHM, 1/16W	1	
R4939	ERJ3EKF2402	M 24KOHM, 1/16W	1	
R4940	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4941	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4942,43	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4944	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R4947	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4950	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4951	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R4952	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4953	ERJ3EKF4702	M 47KOHM, 1/16W	1	
R4954	ERJ3EKF7501	M 7.5KOHM, 1/16W	1	
R4955	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4957	ERJ3EKF3602	M 36KOHM, 1/16W	1	
R4958	ERJ3EKF8202	M 82KOHM, 1/16W	1	
R4959	ERJ3EKF2202	M 22KOHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4960	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4961,62	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R4963	ERJ3EKF4702	M 47KOHM, 1/16W	1	
R4964	ERJ3EKF7501	M 7.5KOHM, 1/16W	1	
R4965	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4966,67	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4969	ERJ3EKF3602	M 36KOHM, 1/16W	1	
R4970	ERJ3EKF6802	M 68KOHM, 1/16W	1	
R4973	ERJ3EKF2402	M 24KOHM, 1/16W	1	
R4974	ERJ3EKF2401	M 2.4KOHM, 1/16W	1	
R4975	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R4981	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R4986	ERJ3GEYJ183	M 18KOHM,J,1/16W	1	
R4987	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R4991,92	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4994,95	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R6001-06	ERJ14YJ150U	M 15 OHM, J,1/4W	6	
R6020	ERG3FJS101D	M 100 OHM, J, 3W	1	
R6021	ERJ14YJ150U	M 15 OHM, J,1/4W	1	
R6022	ERG3FJS101D	M 100 OHM, J, 3W	1	
R6023-27	ERJ14YJ150U	M 15 OHM, J,1/4W	5	
R6031,32	ERJ6ENF8202	M 82KOHM, 1/10W	2	
R6033	ERJ6ENF5602	M 56KOHM, 1/10W	1	
R6034	ERJ6ENF2702	M 27KOHM, 1/10W	1	
R6041-44	ERJ14YJ100	M 10 OHM, J,1/4W	4	
R6051-54	ERJ14YJ100	M 10 OHM, J,1/4W	4	
R6061,62	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R6101-08	ERJ6GEYJ101	M 100 OHM,J,1/10W	8	
R6109	DOGD100JA036	M 10 OHM,J,0.25W	1	
R6110	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6111,12	DOGD470JA036	M 47 OHM,J,0.25W	2	
R6113	ERJ14YJ224	M 220KOHM, J,1/4W	1	
R6114	DOGD470JA036	M 47 OHM,J,0.25W	1	
R6116	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6131,32	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6133,34	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
R6135,36	DOGD100JA036	M 10 OHM,J,0.25W	2	
R6141,42	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6146,47	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6151,52	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6153,54	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
R6155,56	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R6157-60	DOGF1R0JA047	M 1.0 OHM,J, 0.33W	4	
R6171	DOGD100JA036	M 10 OHM,J,0.25W	1	
R6172,73	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6181	DOGD100JA036	M 10 OHM,J,0.25W	1	
R6182,83	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6191-94	ERJ6GEYJ101	M 100 OHM,J,1/10W	4	
R6195	DOGD104JA036	M 100KOHM,J,0.25W	1	
R6196	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6213	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6214	DOGD151JA036	M 150 OHM,J,0.25W	1	
R6222	ERG1FJS103D	M 10KOHM, J, 1W	1	
R6223	ERG2FJS123D	M 12KOHM, J, 2W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6225	D0GD203JA036	M 20KOHM,J,0.25W	1	
R6226,27	ERJ6GEYJ163	M 16KOHM,J,1/10W	2	
R6228	ERJ6GEYJ562	M 5.6KOHM,J,1/10W	1	
R6229	ERJ6GEYJ163	M 16KOHM,J,1/10W	1	
R6231	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6232	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6241	EXB38V470J	RESISTOR ARRAY	1	
R6242	EXB38V472J	RESISTOR ARRAY	1	
R6243	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6244	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6245	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6246	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6251	D0GD103JA036	M 10KOHM,J,0.25W	1	
R6252,53	ERJ6ENF3902	M 39KOHM, 1/10W	2	
R6254	ERJ6ENF8201	M 8.2KOHM, 1/10W	1	
R6255	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6256	ERJ6ENF1501	M 1.5KOHM, 1/10W	1	
R6257	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6258	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6261	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6401-06	ERJ14YJ150U	M 15 OHM, J,1/4W	6	
R6421-26	ERJ14YJ150U	M 15 OHM, J,1/4W	6	
R6441-44	ERJ14YJ100	M 10 OHM, J,1/4W	4	
R6451-54	ERJ14YJ100	M 10 OHM, J,1/4W	4	
R6465	ERJ6ENF2702	M 27KOHM, 1/10W	1	
R6466	ERJ6ENF5602	M 56KOHM, 1/10W	1	
R6467,68	ERJ6ENF8202	M 82KOHM, 1/10W	2	
R6471	ERJ6GEYJ392	M 3.9KOHM,J,1/10W	1	
R6472	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6473	ERJ6GEYJ561	M 560 OHM,J,1/10W	1	
R6474	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6475,76	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
R6477	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6478	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6479	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6501,02	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6503	D0GD100JA036	M 10 OHM,J,0.25W	1	
R6504,05	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
R6506	D0GD100JA036	M 10 OHM,J,0.25W	1	
R6507-09	D0GF1R0JA047	M 1.0 OHM,J, 0.33W	3	
R6511,12	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6516,17	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6521,22	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6523,24	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
R6525,26	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R6531	D0GD100JA036	M 10 OHM,J,0.25W	1	
R6532,33	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6551	D0GD100JA036	M 10 OHM,J,0.25W	1	
R6552,53	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6561-64	EXB38V470J	RESISTOR ARRAY	4	
R6565-68	EXB38V472J	RESISTOR ARRAY	4	
R6581	D0GD103JA036	M 10KOHM,J,0.25W	1	
R6582,83	ERJ6ENF3902	M 39KOHM, 1/10W	2	
R6584	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R6585	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6586	ERJ6ENF1801	M 1.8KOHM, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6587	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6588	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6590	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6591	EXB38V472J	RESISTOR ARRAY	1	
R6592	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6603	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6604	D0GD151JA036	M 150 OHM,J,0.25W	1	
R6605	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6606	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6607	ERJ6ENF5601	M 5.6KOHM, 1/10W	1	
R6608,09	D0GF102JA047	M 1.0 KOHM,J,0.33W	2	
R6610	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6611	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R6612	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6613	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R6614,15	D0GF243JA047	M 24 KOHM,J,0.33W	2	
R6616	ERJ6ENF1502	M 15KOHM, 1/10W	1	
R6617	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R6618	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R6619	ERJ6ENF1501	M 1.5KOHM, 1/10W	1	
R6620	D0D28R2JA021	M 8.2 OHM,J,5W	1	
R6621	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6641,42	ERJ6GEYJ100	M 10 OHM,J,1/10W	2	
R6644,45	ERJ6GEYJ100	M 10 OHM,J,1/10W	2	
R6647,48	ERJ6GEYJ100	M 10 OHM,J,1/10W	2	
R6658	D0D1101JA009	M 100 OHM,J,1W	1	
R6659,60	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R6661	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6662	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R6663	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6664	D0GF222JA047	M 2.2 KOHM,J,0.33W	1	
R6665	ERJ14YJ470	M 47 OHM,J, 1/2W	1	
R6666	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6667,68	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
R6671	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6672	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6673,74	D0GD5R6JA059	M 5.6 OHM,J,0.25W	2	
R6682	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6683	D0GD151JA036	M 150 OHM,J,0.25W	1	
R6684	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6685	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R6686	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6687	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6688	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6689	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6690	ERJ6GEYJ151	M 150 OHM,J,1/10W	1	
R6691	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6696,97	D0D32R2JA020	M 2.2 OHM,J,5W	2	
R6700-08	ERJ6GEYJ471	M 470 OHM,J,1/10W	9	
R6710-18	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	9	
R6721,22	EXB38V220J	RESISTOR ARRAY	2	
R6723	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6724	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6742	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6743	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6744	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6745	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6746,47	D0GD103JA036	M 10KOHM,J,0.25W	2	
R6755	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6756-58	D0GD101JA059	M 100 OHM,J,0.25W	3	
R6759	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6760	ERJ6GEYJ122	M 1.2KOHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6761	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6762	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6775,76	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6777	D0GD151JA036	M 150 OHM,J,0.25W	1	
R6781	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6782	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6791	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6792	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6793	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6801,02	ERX1FJSR22D	M0.22 OHM, J, 1W	2	
R6806	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6807	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R6808	ERG3FJS560D	M 56 OHM, J, 3W	1	
R6809	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6810,11	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R6812	ERJ6ENF2403	M 240KOHM, 1/10W	1	
R6813	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R6814	ERJ6ENF5601	M 5.6KOHM, 1/10W	1	
R6815	ERG2FJS183D	M 18KOHM, J, 2W	1	
R6816	ERJ6ENF1582	M15.8KOHM, 1/10W	1	
R6817	ERJ6ENF2701	M 2.7KOHM, 1/10W	1	
R6821	ERG2FJS221D	M 220 OHM, J, 2W	1	
R6822	ERJ12YJ104U	M 100KOHM, 1/2W	1	
R6823	ERG1FJS104D	M 100KOHM, J, 1W	1	
R6824	ERJ6GEYJ562	M 5.6KOHM,J,1/10W	1	
R6825,26	ERJ6ENF2703	M 270KOHM, 1/10W	2	
R6827	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6828	ERJ6ENF5231	M5.23KOHM, 1/10W	1	
R6829,30	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R6831	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R6833-35	ERJ6ENF5602	M 56KOHM, 1/10W	3	
R6836	ERJ6ENF6802	M 68KOHM, 1/10W	1	
R6837	ERJ6ENF4702	M 47KOHM, 1/10W	1	
R6839	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6841	ERJ12YJ153U	M 15KOHM, 1/2W	1	
R6842	ERJ14YJ433U	M 43KOHM, 1/2W	1	
R6843	ERJ6GEYJ623	M 62KOHM,J,1/10W	1	
R6844	ERG2FJS101D	M 100 OHM, J, 2W	1	
R6845	ERJ6GEYJ623	M 62KOHM,J,1/10W	1	
R6846,47	ERJ6GEYJ563	M 56KOHM,J,1/10W	2	
R6848	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6849,50	ERJ6ENF6802	M 68KOHM, 1/10W	2	
R6851	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6852	ERJ6ENF2491	M2.49KOHM, 1/10W	1	
R6853	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6860	D0D28R2JA021	M 8.2 OHM,J,5W	1	
R6861	ERJ6ENF3902	M 39KOHM, 1/10W	1	
R6862,63	ERJ6ENF4702	M 47KOHM, 1/10W	2	
R6864	ERJ6ENF9101	M 9.1KOHM, 1/10W	1	
R6865,66	ERJ6ENF2201	M 2.2KOHM, 1/10W	2	
R6867	ERJ6GEYJ392	M 3.9KOHM,J,1/10W	1	
R6868	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R6869	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6871-73	ERJ6ENF3902	M 39KOHM, 1/10W	3	
R6874	ERJ6ENF8201	M 8.2KOHM, 1/10W	1	
R6875	ERJ6ENF3301	M 3.3KOHM, 1/10W	1	
R6876	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6877	ERJ6GEYJ392	M 3.9KOHM,J,1/10W	1	
R6878	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R6879	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6886-88	ERJ6GEYJ224	M 220KOHM,J,1/10W	3	
R6901	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6902-04	ERJ3GEYJ220	M 22 OHM,J,1/16W	3	

















Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6908,09	ERJ6GEYJ221	M 220 OHM,J,1/10W	2	
R6916,17	ERJ6GEYJ221	M 220 OHM,J,1/10W	2	
R6924	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6931-34	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R6935,36	ERJ8GEYJ224	M 220KOHM, J,1/8W	2	
R6951	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6952-54	ERJ3GEYJ220	M 22 OHM,J,1/16W	3	
R6958,59	ERJ6GEYJ221	M 220 OHM,J,1/10W	2	
R6966,67	ERJ6GEYJ221	M 220 OHM,J,1/10W	2	
R6974	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6981-84	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R6985,86	ERJ8GEYJ224	M 220KOHM, J,1/8W	2	
R7112	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7113,14	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R7115	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R7116	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R7118,19	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R7120	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7122-25	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7126	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R7127,28	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R7132-37	EXB38V470J	RESISTOR ARRAY	6	
R7139,40	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R7142-45	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7146	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7149	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7151-54	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7155	EXB38V102J	RESISTOR ARRAY	1	
R7156	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7158,59	EXB38V470J	RESISTOR ARRAY	2	
R7162-67	EXB38V102J	RESISTOR ARRAY	6	
R7169	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7171-74	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7175	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7177	EXB38V102J	RESISTOR ARRAY	1	
R7179,80	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7186,87	EXB38V470J	RESISTOR ARRAY	2	
R7201-07	EXB38V470J	RESISTOR ARRAY	7	
R7208-10	ERJ3GEYJ470	M 47 OHM,J,1/16W	3	
R7212-15	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7216	EXB38V470J	RESISTOR ARRAY	1	
R7217	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7219	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R7221	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7223-26	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7227	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7229	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7231	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7232-35	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7236	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	





Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R7237-42	EXB38V102J	RESISTOR ARRAY	6	
R7245	EXB38V102J	RESISTOR ARRAY	1	
R7246-49	ERJ3GEYJ220	M 22 OHM,J,1/16W	4	
R7250,51	EXB38V470J	RESISTOR ARRAY	2	
R7256,57	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7258	EXB38V102J	RESISTOR ARRAY	1	
R7260	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7262-65	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7266	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7269	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7270	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R7271	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R8001-04	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R8005	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R8009-12	ERJ3GEYJ271	M 270 OHM,J,1/16W	4	
R8017,18	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R8021	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R8025	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8026	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R8029	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R8031	ERJ6ENF2201	M 2.2KOHM, 1/10W	1	
R8033	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R8035	ERJ6ENF3300	M 330 OHM, 1/10W	1	
R8036	ERJ6ENF1500	M 150 OHM, 1/10W	1	
R8037	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
R8039	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
R8041	ERJ3GEYJ183	M 18KOHM,J,1/16W	1	
R8045	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R8047	ERJ3GEYJ271	M 270 OHM,J,1/16W	1	
R8048	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R8050	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R8051	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R8054	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8055,56	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R8057	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R8060	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8065	D0GB911JA002	M 910 OHM,J,1/16W	1	
R8067	D0GB911JA002	M 910 OHM,J,1/16W	1	
R8069	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R8072	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8089	ERJ3GEYJ181	M 180 OHM,J,1/16W	1	
R8093	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R8097,98	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R8100	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R8112	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8117-20	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R8121,22	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	2	
R8124-27	ERJ6GEYJ101	M 100 OHM,J,1/10W	4	
R8129	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R8180	ERJ8GEYJ820V	M 82 OHM, J,1/8W	1	
R8181	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R8182	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R8183,84	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R8185,86	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	2	
R8187,88	ERJ6GEYJ560	M 56 OHM,J,1/10W	2	
R8189,90	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R8200	ERJ3GEYJ563	M 56KOHM,J,1/16W	1	
R8201	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R8202	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8203	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R8204	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R8205	ERJ3GEYJ753	M 75KOHM,J,1/16W	1	
R8206	ERJ3GEYJ393	M 39KOHM,J,1/16W	1	
R8207	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9060-67	ERJ3GEYJ101	M 100 OHM,J,1/16W	8	
R9070	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R9074	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9076	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9096	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9098	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9099	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9100,01	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9102	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9105	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9106	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9107	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R9108,09	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9110	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9111	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R9113	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9120	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9121	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9127	ERJ3GEYJ683	M 68KOHM,J,1/16W	1	
R9129	ERJ3GEYJ683	M 68KOHM,J,1/16W	1	
R9131-33	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	3	
R9134	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R9140	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9141-45	ERJ3GEYJ101	M 100 OHM,J,1/16W	5	
R9148	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9149	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9150,51	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9152,53	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R9154,55	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R9156	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9158,59	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9160,61	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9162	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9164-66	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9167,68	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R9169	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9170-72	ERJ3GEYJ393	M 39KOHM,J,1/16W	3	
R9173-75	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9177	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R9178	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9179	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9180	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9181-84	ERJ3GEYJ102	M 1KOHM,J,1/16W	4	
R9185,86	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9187,88	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R9189,90	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9192	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9193	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9194	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9196	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9199	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R9203	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9205	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9206,07	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R9215	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R9217-22	ERJ3GEYJ103	M 10KOHM,J,1/16W	6	
R9223	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9225	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9230	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9232	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9236	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9237	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9240	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9317	ERJ3GEYJ391	M 390 OHM,J,1/16W	1	
R9348	D1HG8208A002	NETWORK RESISTER	1	
R9349	EXB38V820J	RESISTOR ARRAY	1	
R9350,51	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9352	EXB38V820J	RESISTOR ARRAY	1	
R9353,54	D1HG8208A002	NETWORK RESISTER	2	
R9355,56	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R9357-59	D1HG8208A002	NETWORK RESISTER	3	
R9360	EXB38V820J	RESISTOR ARRAY	1	
R9361,62	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9363	EXB2HV470JV	RESISTOR ARRAY	1	
R9366	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9367	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9368	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9369	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9370	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9371	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9379	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9380	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9382	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9390	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9391	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9394	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9395	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9501	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9503	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R9506	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9507	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9511-13	ERJ3GEYJ470	M 47 OHM,J,1/16W	3	
R9514	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9516	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9518	ERJ3GEYJ561	M 560 OHM,J,1/16W	1	
R9523	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9525	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9526	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9527,28	EXB2HV272JV	RESISTOR ARRAY	2	
R9529,30	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9531-33	ERJ3GEYJ470	M 47 OHM,J,1/16W	3	
R9534	EXB38V470J	RESISTOR ARRAY	1	
R9535,36	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R9538	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9540	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9543,44	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9545	ERJ3GEYJ304V	M 300KOHM,J,1/16W	1	
R9548-50	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9552	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9555	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9800	ERJ3EKF1302	M 23KOHM, 1/16W	1	
R9801	ERJ3EKF2402	M 24KOHM, 1/16W	1	
R9802	ERJ3EKF6202	M 62KOHM, 1/16W	1	
R9803	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9804	ERJ3EKF2402	M 24KOHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9805	ERJ3EKF3002	M 30KOHM, 1/16W	1	
R9806	ERJ3EKF3902	M 39KOHM, 1/16W	1	
R9807	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9808	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9810	ERJ3EKF3001	M 3KOHM, 1/16W	1	
R9813	ERJ3EKF2401	M 2.4KOHM, 1/16W	1	
R9814	ERJ3EKF6802	M 68KOHM, 1/16W	1	
R9815	ERJ3EKF2202	M 22KOHM, 1/16W	1	
R9816	ERJ3EKF8202	M 82KOHM, 1/16W	1	
R9821	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9823-27	ERJ3GEYJ101	M 100 OHM,J,1/16W	5	
R9828	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9830,31	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9838,39	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R9840	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9841	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9842-44	ERJ3GEYJ101	M 100 OHM,J,1/16W	3	
R9845	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9846,47	EXB2HV272JV	RESISTOR ARRAY	2	
R9848,49	EXB2HV470JV	RESISTOR ARRAY	2	
R9850	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R9854	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9859	EXB38V101J	RESISTOR ARRAY	1	
R9861-63	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9868	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9869-71	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9872	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9878	ERJ3EKF3902	M 39KOHM, 1/16W	1	
R9879	ERJ3EKF2002	M 20KOHM, 1/16W	1	
R9880	ERJ3EKF3602	M 36KOHM, 1/16W	1	
R9883	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9884	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9891	ERJ3EKF4702	M 47KOHM, 1/16W	1	
R9892	ERJ3EKF1502	M 15KOHM, 1/16W	1	
R9893	ERJ3EKF3602	M 36KOHM, 1/16W	1	
R9896	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9897	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9903	EXB2HV470JV	RESISTOR ARRAY	1	
R9904	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R9905	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R9906	EXB38V470J	RESISTOR ARRAY	1	
R9907	ERJ3GEYJ151	M 150 OHM,J,1/16W	1	
R9917,18	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9919,20	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9922	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9929	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9936-39	ERJ3EKF1001	M 1KOHM, 1/16W	4	
R9940	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R9941,42	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R9943-51	EXB38V470J	RESISTOR ARRAY	9	
R9952-55	ERJ3GEYJ470	M 47 OHM,J,1/16W	4	
R9956	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
RL402,03	TSEH8011	RELAY	2	△
RM2501	PNA4701M05TV	REMOCO RECEIVER	1	
RTL	TNPA3896AB	CIRCUIT BOARD J	1	PAVCA △
RTL	TNPA2842S	CIRCUIT BOARD HX	1	PAVCA △
RTL	TXNDA1ZHTU	CIRCUIT BOARD DA	1	PAVCA △
RTL	TXNPBLZKTU	CIRCUIT BOARD PB	1	PAVCA △

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
RTL	TXNC11BKTUE	CIRCUIT BOARD C1	1	PAVCA 
RTL	TXNC21BKTUE	CIRCUIT BOARD C2	1	PAVCA 
RTL	TNPA3810AJS	CIRCUIT BOARD D	1	PAVCA 
RTL	TXN/PIZHTU	CIRCUIT BOARD P	1	PAVCA 
RTL	TXNSC1BKTUE	CIRCUIT BOARD SC	1	PAVCA 
RTL	TXNSD1BKTUE	CIRCUIT BOARD SD	1	PAVCA 
RTL	TXNSS1BKTUE	CIRCUIT BOARD SS	1	PAVCA 
RTL	TXNSU1BKTUE	CIRCUIT BOARD SU	1	PAVCA 
RTL	TXNGK1ZQTU	CIRCUIT BOARD GK	1	PAVCA 
RTL	TXN/K1ZQTU	CIRCUIT BOARD K	1	PAVCA 
RTL	TXN/S1ZQTU	CIRCUIT BOARD S	1	PAVCA 
S1	K1KA03BA0061	3P CONNECTOR	1	
S401,02	J0LT00000009	SWITCH	2	
SC2	K1KA02A00626	2P CONNECTOR	1	
SC20	K1KA20AA0008	20P CONNECTOR	1	
SC23	K1KA03AA0193	3P CONNECTOR	1	
SC30	K1KA08AA0192	8P CONNECTOR	1	
SC41,42	K1ML80B00001	80P CONNECTOR	2	
SC45,46	K1KA09A00239	9P CONNECTOR	2	
SCMM1	TMME260	CLAMPER	1	
SCMM3	TMME260	CLAMPER	1	
SD1-D3	K1MNC0B00002	CONNECTOR	3	PAVCA
SD46	K1KB09A00045	9P CONNECTOR	1	
SS11	K1KA02A00626	2P CONNECTOR	1	
SS12	K1KA10AA0194	10P CONNECTOR	1	
SS23	K1KA12AA0194	12P CONNECTOR	1	
SS34	K1KA03AA0193	3P CONNECTOR	1	
SS41A-4A	K1MN13B00020	13P CONNECTOR	4	
SU1-U3	K1MNC0B00002	CONNECTOR	3	PAVCA
SU45	K1KB09A00045	9P CONNECTOR	1	
SW2500	K0F162B00002	SWITCH	1	
SW3753-57	EVQ11G05R	SWITCH	5	
T401	G4D4A0000119	SWITCHING TRANSFORMER	1	
T402	G4D1A0000098	SWITCHING TRANSFORMER	1	
T404	ETS42LA12GAD	SWITCHING TRANS	1	
T407	ETQ11K5AZ	CHOKE TRANS	1	
T410	ETS25AF115AH	SWITCHING TRANS	1	
T601	G4D2A0000264	SWITCHING TRANS	1	
T6602	ETS25AZ139AD	SWITCHING TRANS	1	
W9,10	J0JKB0000037	FLAT CORE	2	
VR6000	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
VR6600	EVMEASA00B13	CONTROL 1KOHMB 0.3W	1	
VR6602	EVMEASA00B53	CONTROL 5KOHMB 0.3W	1	
X501	H2B400400021	CRYSTAL	1	
X2301	H0J184500026	CRYSTAL	1	PAVCA
X4501	H0J200500038	CRYSTAL	1	
X4701	H0J100500030	CRYSTAL	1	
X8181	H0J327200114	CRYSTAL	1	
X9000	H2D200500011	CRYSTAL	1	
X9200	H0J200500038	CRYSTAL	1	
Z1,Z2	K4ZZ01000206	TERMINAL	2	
Z420	TMM23417	CLAMPER	1	
Z450-53	EYF52BCY	FUSE HOLDER	4	
ZA3001-08	K4CD01000013	TERMINAL	8	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
ZA4001,02	K4CD01000011	TERMINAL	2	
ZA6001,02	K4CD01000011	TERMINAL	2	
ZA6005	K4CD01000011	TERMINAL	1	
ZA6401-03	K4CD01000011	TERMINAL	3	
ZA7101-04	K4CD01000013	TERMINAL	4	
ZA7201-04	K4CD01000013	TERMINAL	4	
ZA9001	K4CD01000011	TERMINAL	1	
ZN401	ERZVGED621T2	VARISTOR	1	
ZN402	D4EAD7510001	VARISTOR	1	
ZN404	ERZVGAD681T2	VARISTOR	1	
ZN406	ERZVA7D511	VARISTOR	1	

18.3. TH-42PR9U Electrical Replacement Parts List

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
F401,402	K5D802BNA005	TIME LAG FUSE HIGH	2	△
F410	K5G102B00020	FUSE	1	△
C11	K1MN55BA0076	55P CONNECTOR	1	
C12	K1MN20BA0231	20P CONNECTOR	1	
C21	K1MN55BA0076	55P CONNECTOR	1	
C22	K1MN20BA0231	20P CONNECTOR	1	
C23	K1KA12BA0107	12P CONNECTOR	1	
C402	FLJ1C1050011	C 1UF, Z, 50V	1	
C404	F0CAF105A021	C 1UF, 250V	1	△
C407	EEUEB2W220B	E 22UF, 450V	1	△
C408	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C409	F0CAF225A021	C 22UF, 250V	1	△
C410	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C413	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C414	ECQU2A473ML	P 0.047UF, M, 250V	1	△
C421	FLJ1C1050011	C 1UF, Z, 50V	1	
C422	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C423	ECJ2XB1H472K	C 4700PF, K, 50V	1	
C425	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C426	ECJ2XC1H471J	C 470PF, J, 50V	1	
C427	FLJ1C1050011	C 1UF, Z, 50V	1	
C428	ECJ2XC1H221J	C 220PF, J, 50V	1	
C429	F1E2J4730001	C 0.047PF, , 600V	1	
C431	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C432	FLJ1C1050011	C 1UF, Z, 50V	1	
C433	ECJ3XB1E104K	C 0.1UF, K, 25V	1	
C434	FLJ1C1050011	C 1UF, Z, 50V	1	
C436	FLJ1C1050011	C 1UF, Z, 50V	1	
C440	ECA1HM100	E 10UF, 50V	1	
C443,44	F1A3A102A040	C 1000PF, J, 1KV	2	
C445	FLJ1C1050011	C 1UF, Z, 50V	1	
C446,47	F2B2W2010001	C 200UF, 450V	2	△
C450	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C451	F1A3A101A040	C 100PF, J, 1KV	1	
C457	ECWH12333RHV	P 0.013UF, J, 1.2KV	1	
C460,61	F1A3A331A039	E 330UF, 1KV	2	
C462	ECJ3YB1E105K	C 1UF, K, 25V	1	
C463	ECJ2XC1H220J	C 22UF, J, 50V	1	
C467	ECKCNA221KB7	C 220PF, M,	1	△
C468	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C469	ECKCNA221KB7	C 220PF, M,	1	△
C470	F0CAF105A021	C 1UF, 250V	1	△
C473,74	ECKCNA101KB7	C 100PF	2	△
C476	ECKCNA101KB7	C 100PF	1	△
C478	ECKCNA101KB7	C 100PF	1	△
C493	ECA1HM470	E 47UF, 50V	1	
C494	F2A2E1R00008	E 1.0UF, 250V	1	
C497	ECA1HM470	E 47UF, 50V	1	
C501,02	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C503	ECJ2XC1H471J	C 470PF, J, 50V	1	
C504	FLJ1C1050011	C 1UF, Z, 50V	1	
C505	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C506,07	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C508	ECJ2XC1H471J	C 470PF, J, 50V	1	
C509	ECA1EHG101	E 100UF, 25V	1	
C510	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C511	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C512-14	ECJ2XC1H471J	C 470PF, J, 50V	3	
C515	F2A1A1220011	E 1200UF, 10V	1	
C516	ECJ2XB1C474K	C 0.47UF, Z, 16V	1	
C517	F2A1E221A096	E 220UF, 25V	1	
C518	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C519	FLJ1C1050011	C 1UF, Z, 50V	1	
C520	ECWH8683RHV	P 0.068PF, J, 8KV	1	
C523	ECJ3YB1E105K	C 1UF, K, 25V	1	
C526	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C527	ECJ3YB1E475K	C 4.7UF, K, 25V	1	
C528,29	FLJ1C1050011	C 1UF, Z, 50V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C530	ECJ2VB1H333K	C 0.033UF, K, 50V	1	
C531	ECJ3YB1E105K	C 1UF, K, 25V	1	
C533	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C534	ECJ2XC1H471J	C 470PF, J, 50V	1	
C546,47	ECJ2XB1H102K	C 1000PF, K, 50V	2	
C550	ECJ2XC1H331J	C 330PF, J, 50V	1	
C551,52	ECJ2XB1H104K	C 0.1UF, K, 50V	2	
C554	FLJ1C1050011	C 1UF, Z, 50V	1	
C555	F2A2C471A119	E 470UF, 160V	1	△
C556,57	EEUFC1E152	E 1500UF, 25V	2	
C558	F2A1E471A096	E 470UF, 25V	1	
C559	F2A1A1220011	E 1200UF, 10V	1	
C562	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C571	ECJ2XC1H330J	C 33PF, J, 50V	1	
C574	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C577	F2A2A330A022	E 33UF, 100V	1	△
C581	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C583	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C584,85	ECJ2XB1H223K	C 0.022UF, K, 50V	2	
C587	ECJ2XB1H332K	C 3300PF, K, 50V	1	
C601	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C603	ECJ2FB1E105K	C 1UF, K, 25V	1	
C604,05	F2A2D1510008	E 150UF, 200V	2	△
C607	FLJ1C1050011	C 1UF, Z, 50V	1	
C608	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C610	FLJ1C1050011	C 1UF, Z, 50V	1	
C611	F2B2T1420003	E 142UF, 220V	1	△
C612,13	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C615	F2B2T1420003	E 142UF, 220V	1	△
C616	F1A3A102A040	C 1000PF, J, 1KV	1	
C619	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C620	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C623	ECA1HM100	E 10UF, 50V	1	
C624	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C625	ECA1HM100	E 10UF, 50V	1	
C626	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C627	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C629-31	ECJ2XB1H103K	C 0.01UF, K, 50V	3	
C632	ECJ2XC1H331J	C 330PF, J, 50V	1	
C634	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C635	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C638,39	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C640	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C641	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C643	ECA1HM470	E 47UF, 50V	1	
C650	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C653	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C654	ECJ3YB1E105K	C 1UF, K, 25V	1	
C655,56	ECJ3YB1E225K	C 2.2UF, K, 25V	2	
C657	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C658	ECJ3YB1E105K	C 1UF, K, 25V	1	
C659	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C660	ECJ2FB1C225K	C 22UF, K, 16V	1	
C661,62	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C801	F2H1V221A004	E 220UF, 35V	1	PAVCA
C802	F2H1E471A010	E 470UF, 25V	1	PAVCA
C804	ECJ1VB1H472K	C 4700PF, K, 50V	1	
C805	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C806	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C807	ECJ3YF1E225Z	C 2.2UF, Z, 25V	1	PAVCA
C808	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C809	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C811	EEVHB1C471	E 470UF, 16V	1	
C812	F2H1E471A010	E 470UF, 25V	1	PAVCA
C814	ECJ1VB1H472K	C 4700PF, K, 50V	1	
C815	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C816	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C817	ECJ3YF1E225Z	C 2.2UF, Z, 25V	1	PAVCA
C818	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C819	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C821	EEVHB1C471	E 470UF, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C822	F2H1E471A010	E 470UF, 25V	1	PAVCA
C823	ECJ1XC1H470J	C 47PF, J, 50V	1	
C824	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C825	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C827	ECJ3YF1E225Z	C 2.2UF, Z, 25V	1	PAVCA
C828	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C829	ECJ3YB1E106M	C 10 UF, K, 25V	1	
C831	EEH1B1C470P	C 47PF, J, 16V	1	
C832	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C833	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C834,35	EEH1B1C470P	C 47PF, J, 16V	2	
C837	FLJ0J1060004	C 0.010UF, K, 16V	1	
C838	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C839	FLJ0J1060004	C 0.010UF, K, 16V	1	
C840	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C841	FLJ0J1060004	C 0.010UF, K, 16V	1	
C843	ECJ3YB1E106M	C 10 UF, K, 25V	1	
C844	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C845	ECJ3YB1E106M	C 10 UF, K, 25V	1	
C846	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C847	FLJ0J1060004	C 0.010UF, K, 16V	1	
C848	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C850	ECQB1H104JF	P 0.1UF, J, 50V	1	
C852	ECA1EM471	E 470UF, 25V	1	
C854	EEUFC1C471	E 470UF, 16V	1	
C855-57	ECJ1VB1H103K	C 0.001UF, K, 50V	3	
C867	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C869	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C2350,5	ECJ3YB1C225K	C 0.022UF, K, 16V	2	
C2352,5	EEH1B1H100P	C 10PF, J, 50V	2	
C2354,5	EEH1B1V470P	E 47UF, 35V	2	
C2356,5	ECJ1XB1H102K	C 1000UF, Z, 50V	2	
C2358,5	EEH1P1V2R2R	E 2.2UF, 35V	2	
C2360,6	ECJ1XC1H102J	C 1000PF, J, 50V	2	
C2362,6	EEH1B1E471UP	C 470PF, J, 25V	2	
C2364,6	ECQV1H104JM	P 0.1UF, J, 50V	2	
C2366,6	ECJ3YB1E225K	C 2.2UF, K, 25V	2	
C2368,6	ECQV1H104JM	P 0.1UF, J, 50V	2	
C2370,7	EEH1B1H100P	C 10PF, J, 50V	2	
C2373-75	ECJ1VB1E104K	C 0.10UF, K, 25V	3	
C2376,7	ECJ1XC1H150J	C 15PF, J, 50V	2	
C2378-82	ECJ1VB1E104K	C 0.10UF, K, 25V	5	
C2383	EEH1B1A101P	C 100PF, J, 10V	1	
C2384	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C2385	EEH1B1A101P	C 100PF, J, 10V	1	
C2386,8	EEH1P1H1R0R	C 1.0PF, J, 50V	2	
C2388	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C2389	EEH1B1A101P	C 100PF, J, 10V	1	
C2390	EEH1B1H100P	C 10PF, J, 50V	1	
C2391	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C2392,9	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C2394	EEH1B1H100P	C 10PF, J, 50V	1	
C2395,9	ECJ1VB1E104K	C 0.10UF, K, 25V	2	
C2397	EEH1B1A101P	C 100PF, J, 10V	1	
C2398-03	ECJ1VB1E104K	C 0.10UF, K, 25V	6	
C2404	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C2405,0	ECJ1VB0J225K	C 2.2UF, K, 6.3V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C2407,0	FLJ0J1060004	C 0.010UF, K, 16V	2	
C2409,1	ECJ1XC1H181J	C 180PF, J, 50V	2	
C2411	ECJ3YB1E106M	C 10 UF, K, 25V	1	
C2412,1	ECJ1VB1E104K	C 0.10UF, K, 25V	2	
C2420	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C2425,2	ECJ1VB1E104K	C 0.10UF, K, 25V	2	
C2512	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C2515	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C2521	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C3001	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C3004	EEH1B1C470P	C 47PF, J, 16V	1	
C3009-11	ECJ1VB1E104K	C 0.10UF, K, 25V	3	
C3012-17	ECJ1VF1H103Z	C 0.010UF, Z, 50V	6	
C3018	EEH1B1C470P	C 47PF, J, 16V	1	
C3019	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3020-31	ECJ3YB1C225K	C 0.022UF, K, 16V	12	
C3032	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C3033-35	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C3040,4	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C3042,4	EEH1B1C100R	C 10PF, J, 16V	2	
C3051-58	ECJ1VF1C105Z	C 1UF, Z, 16V	8	
C3101	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C3103	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C3105-08	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C3110	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C3111,1	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C3113	EEH1B1C470P	C 47PF, J, 16V	1	
C3114	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C3115	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3134-36	F2H0J102A010	C 1000UF, 6.3V	3	
C3143,4	ECJ3YB1C225K	C 0.022UF, K, 16V	2	
C3146	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C3150-52	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C3200	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3201-03	FLJ0J1060004	C 0.010UF, K, 16V	3	
C3404	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3405	EEH1B1C470P	C 47PF, J, 16V	1	
C3409	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3523	EEH1B1C470P	C 47PF, J, 16V	1	
C3524	ECJ2VF1H103Z	C 0.010UF, Z, 50V	1	
C3550	ECJ2VF1H103Z	C 0.010UF, Z, 50V	1	
C3551	EEH1B1C470P	C 47PF, J, 16V	1	
C3561,6	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3750	ECJ2XC1H102K	C 1000PF, K, 50V	1	
C4001,0	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C4003	ECJ1VB1H822K	C 8200PF, K, 50V	1	
C4004	ECJ1VB1C823K	C 0.082UF, K, 16V	1	
C4006	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4007-09	ECJ2XB1E104K	C 0.1UF, K, 25V	3	
C4010	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C4011-13	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C4016	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4017	EEH1B1C470P	C 47PF, J, 16V	1	
C4018,1	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C4020,21	F1J0J106A013	C 0.010UF, K, 16V	2	
C4022	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4024	F1J0J106A013	C 0.010UF, K, 16V	1	
C4031,32	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C4201	EEHBC470P	C 47PF, J, 16V	1	
C4202-13	ECJ1XB1C104K	C 0.1UF, Z, 16V	12	
C4219-22	F1J0J106A013	C 0.010UF, K, 16V	4	
C4225	F1J0J106A013	C 0.010UF, K, 16V	1	
C4227	F1J0J106A013	C 0.010UF, K, 16V	1	
C4301	F2G0J470A019	E 47UF 6.3V	1	
C4302	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4303,04	ECJ1XB1H102K	C 1000UF, Z, 50V	2	
C4305,06	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4307	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C4308	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4309	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4311	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4312	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4313	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C4502	F1J0J1060004	C 0.010UF, K, 16V	1	
C4503,04	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4505	ECJ1XC1H150J	C 15PF, J, 50V	1	
C4506	ECJ1VC1H080C	C 8PF, C, 50V	1	
C4541,42	ECJ1XC1H080D	C 8PF, D, 50V	2	
C4543	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4544	EEHBC0G221P	C 220PF, J, 4V	1	
C4545	F1J0J106A013	C 0.010UF, K, 16V	1	
C4546,47	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C4548,49	F1J0J106A013	C 0.010UF, K, 16V	2	
C4550,51	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C4552	F1J0J106A013	C 0.010UF, K, 16V	1	
C4553-97	ECJ1XF1C104Z	C 0.1UF, Z, 16V	45	
C4598	EEHBC0G221P	C 220PF, J, 4V	1	
C4599-14	ECJ1XB1C104K	C 0.1UF, Z, 16V	16	
C4629	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4671	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4672	F1J0J1060004	C 0.010UF, K, 16V	1	
C4701	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4703	F1J0J106A013	C 0.010UF, K, 16V	1	
C4704-19	ECJ1XB1C104K	C 0.1UF, Z, 16V	16	
C4733	ECJ1XF1H102Z	C 1000PF, Z, 50V	1	
C4743	TCUY1C105ZFN	C 1UF, 16V	1	
C4744	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4749,50	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C4751,52	ECJ1XC1H150J	C 15PF, J, 50V	2	
C4753	ECJ1XF1H102Z	C 1000PF, Z, 50V	1	
C4754	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4803	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4804	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4861	TCUY1C105ZFN	C 1UF, 16V	1	
C4862	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4863	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4864	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4865	ECJ2FF1C475Z	C 0.047UF, Z, 16V	1	
C4866	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4871	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4881,82	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C4884,85	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C4886	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4887	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C4901,02	ECJ3YB1E106M	C 10 UF, K, 25V	2	
C4903	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C4904	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4905	ECJ1VB1H822K	C 8200PF, K, 50V	1	
C4906	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4907	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4908	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C4909	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C4910	ECJ3YB1E106M	C 10 UF, K, 25V	1	
C4911	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C4912	ECJ3YB1E106M	C 10 UF, K, 25V	1	
C4913	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4914	EEHBC470P	C 47PF, J, 16V	1	
C4915	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4917	EEHBC470P	C 47PF, J, 16V	1	
C4918	ECJ3YB1E106M	C 10 UF, K, 25V	1	
C4919	ECJ1VB0J475K	C 4.7UF, K, 6.3V	1	
C4920	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4921	ECGRLOG680ER	C 68PF, J, 4V	1	
C4923	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C4924	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4925	ECJ1VB1E272K	C 2700PF, K, 25V	1	
C4926	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4927	ECJ1XC1H470J	C 47PF, J, 50V	1	
C4928	ECJ1VB1H472K	C 4700PF, K, 50V	1	
C4929	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C4930,31	ECJ3YB1E106M	C 10 UF, K, 25V	2	
C4932	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C4933	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4934	ECJ1VB1H822K	C 8200PF, K, 50V	1	
C4935	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4936	ECJ1VC1H100C	C 10PF, C, 50V	1	
C4937	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C4938	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C4939	ECJ1VB0J475K	C 4.7UF, K, 6.3V	1	
C4940	ECGRLOG680ER	C 68PF, J, 4V	1	
C4942	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4943	ECJ1VC1H100C	C 10PF, C, 50V	1	
C4944	ECJ1VB0J475K	C 4.7UF, K, 6.3V	1	
C4945	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4946	ECGRLOG680ER	C 68PF, J, 4V	1	
C4990	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4991	F1J0J106A013	C 0.010UF, K, 16V	1	
C4992,93	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C4994,95	F1J0J106A013	C 0.010UF, K, 16V	2	
C4996	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4997	F1J0J106A013	C 0.010UF, K, 16V	1	
C4998	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4999	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C6001	F1L2J332A022	C 3300UF, K, 6.3V	1	
C6002	F1L2J222A022	C 2200UF, K, 6.3V	1	
C6011-15	F2A2T201A001	E 200UF,	5	
C6021,22	F1L2J272A022	C 2700UF, K, 6.3V	2	
C6031	ECQE2255JF	P 2.5UF, K, 250V	1	
C6041-44	TCUY1C105ZFN	C 1UF, 16V	4	
C6091	F1L2J1020001	C 1000UF, K, 6.3V	1	
C6111,12	F2A2D221A022	E 220UF, 200V	2	
C6132	F1L1E4750004	C 4.7UF, 25V	1	
C6134,35	F1L1E4750004	C 4.7UF, 25V	2	
C6151	F1K1E1050001	C 1UF, Z, 25V	1	
C6152-55	F1L1E4750004	C 4.7UF, 25V	4	
C6192	F1K1E1050001	C 1UF, Z, 25V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6194,95	F1L1E4750004	C 4.7UF, 25V	2	
C6201,02	F0C2E405A176	E 0.040UF, 250V	2	
C6211,12	F1L1E4750004	C 4.7UF, 25V	2	
C6213,14	ECA1EM471	E 470UF, 25V	2	
C6221	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6241	ECA1EM471	E 470UF, 25V	1	
C6242	TCUY1C105ZFN	C 1UF, 16V	1	
C6243	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6251	TCUY1C105ZFN	C 1UF, 16V	1	
C6261,62	ECA2CM101	E 100UF, 160V	2	
C6271	F1K1E1050001	C 1UF, Z, 25V	1	
C6272,73	EEUFC1E221	E 220UF, 25V	2	
C6401	F1L2J332A022	C 3300UF, K,6.3V	1	
C6402	F1L2J222A022	C 2200UF, K,6.3V	1	
C6411-15	F2A2T201A001	E 200UF,	5	
C6421,22	F1L2J272A022	C 2700UF, K,6.3V	2	
C6431	F0C2E405A176	E 0.040UF, 250V	1	
C6472	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6480	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6502	F1L1E4750004	C 4.7UF, 25V	1	
C6504,05	F1L1E4750004	C 4.7UF, 25V	2	
C6511,12	F0C2E405A176	E 0.040UF, 250V	2	
C6521	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6522	F1L1E4750004	C 4.7UF, 25V	1	
C6524,25	F1L1E4750004	C 4.7UF, 25V	2	
C6527	F1L1E4750004	C 4.7UF, 25V	1	
C6561	F2A1A1010074	E 100UF, 10V	1	
C6563	F2A1A1010074	E 100UF, 10V	1	
C6565,66	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C6581	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6582	TCUY1C105ZFN	C 1UF, 16V	1	
C6591	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6592	ECA1EM471	E 470UF, 25V	1	
C6593	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C6601,02	F1L1E4750004	C 4.7UF, 25V	2	
C6603	F1K2J102A014	C 1000UF, K,6.3V	1	
C6604	F2A2V470A020	E 47UF, 350V	1	
C6605	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6606	F1K2J102A014	C 1000UF, K,6.3V	1	
C6610	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6611	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6612	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6620	ECJ3XB2J222K	C 2200PF, K,630V	1	
C6641	ECQE2224KF	P 2.2UF, K,250V	1	
C6661,62	F1K2J102A014	C 1000UF, K,6.3V	2	
C6671	F1L1E4750004	C 4.7UF, 25V	1	
C6681,82	F1L1E4750004	C 4.7UF, 25V	2	
C6683	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6691	ECA2CM101	E 100UF, 160V	1	
C6701-08	ECJ2XB1H104K	C 0.1UF, K, 50V	8	
C6721	ECA1HM101	E 100UF, 50V	1	
C6723-25	F1L1E4750004	C 4.7UF, 25V	3	
C6726,27	TCUY1C105ZFN	C 1UF, 16V	2	
C6728	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C6752	TCUY1C105ZFN	C 1UF, 16V	1	
C6753	F1L1E4750004	C 4.7UF, 25V	1	
C6754	ECA1VM470	E 47UF, 35V	1	
C6755	ECJ2XB1H104K	C 0.1UF, K, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6771	TCUY1C105ZFN	C 1UF, 16V	1	
C6772,73	F1L1E4750004	C 4.7UF, 25V	2	
C6775	F1L1E4750004	C 4.7UF, 25V	1	
C6776,77	ECJ2XB1H104K	C 0.1UF, K, 50V	2	
C6791	EEUFC1E221	E 220UF, 25V	1	
C6795,96	EEUFC1E221	E 220UF, 25V	2	
C6802	EEUFC1E221	E 220UF, 25V	1	
C6803	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6804	F2A2E100A022	E 10UF, 250V	1	
C6805	TCUY1C105ZFN	C 1UF, 16V	1	
C6806,07	ECA2CM101	E 100UF, 160V	2	
C6811	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6812	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6822	F2A2V100A019	E 10UF, 350V	1	
C6823	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6841,42	ECA2CM101	E 100UF, 160V	2	
C6845	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6861	TCUY1C105ZFN	C 1UF, 16V	1	
C6862	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6863	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6871	TCUY1C105ZFN	C 1UF, 16V	1	
C6872	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6873	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6901	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C6902	TCUY1C105ZFN	C 1UF, 16V	1	
C6904	TCUY1C105ZFN	C 1UF, 16V	1	
C6906	TCUY1C105ZFN	C 1UF, 16V	1	
C6908	TCUY1C105ZFN	C 1UF, 16V	1	
C6910	TCUY1C105ZFN	C 1UF, 16V	1	
C6912	TCUY1C105ZFN	C 1UF, 16V	1	
C6914-18	ECJ2XB1H221K	C 220PF, K, 50V	5	
C6931	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C6932-35	F1L2E105A013	E 0.10UF, 25V	4	
C6951	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C6952	TCUY1C105ZFN	C 1UF, 16V	1	
C6955	TCUY1C105ZFN	C 1UF, 16V	1	
C6957,58	TCUY1C105ZFN	C 1UF, 16V	2	
C6961	TCUY1C105ZFN	C 1UF, 16V	1	
C6963	TCUY1C105ZFN	C 1UF, 16V	1	
C6964-68	ECJ2XB1H221K	C 220PF, K, 50V	5	
C6981	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C6982-85	F1L2E105A013	E 0.10UF, 25V	4	
C7108	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7110	TCUY1C105ZFN	C 1UF, 16V	1	
C7111,12	ECJ3XB2A474K	C 0.47UF, 6.3V	2	
C7114	TCUY1C105ZFN	C 1UF, 16V	1	
C7115	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7116	TCUY1C105ZFN	C 1UF, 16V	1	
C7117	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7119	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7121	TCUY1C105ZFN	C 1UF, 16V	1	
C7122	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7123	TCUY1C105ZFN	C 1UF, 16V	1	
C7124	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7126	TCUY1C105ZFN	C 1UF, 16V	1	
C7127	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7130	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7134	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7137,38	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C7140	TCUY1C105ZFN	C 1UF, 16V	1	
C7141	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7143	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7145	TCUY1C105ZFN	C 1UF, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C7146	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7148	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7201	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7203	TCUY1C105ZFN	C 1UF, 16V	1	
C7204,05	ECJ3XB2A474K	C 0.47UF, 6.3V	2	
C7207	TCUY1C105ZFN	C 1UF, 16V	1	
C7208	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7209	TCUY1C105ZFN	C 1UF, 16V	1	
C7210	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7212	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7214	TCUY1C105ZFN	C 1UF, 16V	1	
C7215	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7216	TCUY1C105ZFN	C 1UF, 16V	1	
C7217	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7219	TCUY1C105ZFN	C 1UF, 16V	1	
C7220	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7223	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7225	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7227	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7229	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7235	TCUY1C105ZFN	C 1UF, 16V	1	
C7236	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7238	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7240	TCUY1C105ZFN	C 1UF, 16V	1	
C7241	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7244	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C8003	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C8005	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C8007	ECJ1XC1H101J	C 100PF, J, 50V	1	
C8009	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C8013	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C8015	ECJ3YF1A106Z	C 10UF, Z, 10V	1	
C8016	ECJ3YB1A475K	C 0.047UF, K, 10V	1	
C8019	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C8021	ECJ3VB1C474K	C 0.47UF, K, 16V	1	
C8023	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C8025	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C8027	ECJ3YB1C225K	C 0.022UF, K, 16V	1	
C8029	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C8030	EEEB1C470P	C 47PF, J, 16V	1	
C8033	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C8035	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C8036	ECJ1XC1H101J	C 100PF, J, 50V	1	
C8038	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C8045	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C8049	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C8051	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C8070	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C8072,73	ECJ3YF1A106Z	C 10UF, Z, 10V	2	
C8074,75	ECJ1XC1H102J	C 1000PF, J, 50V	2	
C8080-83	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C8084	TCUY1C105ZFN	C 1UF, 16V	1	
C8100	EEEB1C470P	C 47PF, J, 16V	1	
C8101	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C8102,03	EEEB1C470P	C 47PF, J, 16V	2	
C8106	EEEB1C470P	C 47PF, J, 16V	1	
C8107	EEVB1C471	E 470UF, 16V	1	
C8108,09	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C8111-13	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C8114	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C8115	EEEB1C470P	C 47PF, J, 16V	1	
C8116	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C8120	F2H1E471A010	E 470UF, 25V	1	PAVCA
C8121	ECJ3YF1E225Z	C 2.2UF, Z, 25V	1	PAVCA
C8122	EEEB1C470P	C 47PF, J, 16V	1	
C8123	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C8181,82	ECJ1XC1H150J	C 15PF, J, 50V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C8183	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C8185	EECS5R5H155	E 1.5UF, 5.5V	1	
C8200	EEEB1C470P	C 47PF, J, 16V	1	
C9028,29	FLJ0J1060004	C 0.010UF, K, 16V	2	
C9033,34	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9035,36	FLJ0J1060004	C 0.010UF, K, 16V	2	
C9037	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C9039	FLJ0J1060004	C 0.010UF, K, 16V	1	
C9040	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9044-53	ECJ1XF1C104Z	C 0.1UF, Z, 16V	10	
C9055-57	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9058	FLJ0J1060004	C 0.010UF, K, 16V	1	
C9060	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9467,68	ECJ1VF1H103Z	C 0.010UF, Z, 50V	2	
C9469	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9500-06	ECJ1XB1C104K	C 0.1UF, Z, 16V	7	
C9508	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9509	ECJ1VC1H200J	C 20PF, C, 50V	1	
C9510	ECJ1XC1H150J	C 15PF, J, 50V	1	
C9511	FLJ0J1060004	C 0.010UF, K, 16V	1	
C9512	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9514,15	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C9516-25	ECJ1XB1C104K	C 0.1UF, Z, 16V	10	
C9526	FLJ0J1060004	C 0.010UF, K, 16V	1	
C9527-30	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C9531	FLJ0J1060004	C 0.010UF, K, 16V	1	
C9800	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9801	ECJ1VB1H472K	C 4700PF, K, 50V	1	
C9802	ECJ1XC1H470J	C 47PF, J, 50V	1	
C9803	ECJ1VB1H472K	C 4700PF, K, 50V	1	
C9804	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9805	ECJ1VB0J475K	C 4.7UF, K, 6.3V	1	
C9806	ECGR10G680ER	C 68PF, J, 4V	1	
C9807,08	ECJ3YB1E106M	C 10 UF, K, 25V	2	
C9809	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9815,16	ECGR10G680ER	C 68PF, J, 4V	2	
C9817,18	ECJ3YB1E106M	C 10 UF, K, 25V	2	
C9822	FLJ0J1060004	C 0.010UF, K, 16V	1	
C9823,24	ECJ3YB1E106M	C 10 UF, K, 25V	2	
C9825	ECJ1XC1H101K	C 100PF, K, 50V	1	
C9826	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9827	FLJ0J1060004	C 0.010UF, K, 16V	1	
C9830-32	ECJ3XB1C106M	C 1.0UF, K, 16V	3	
C9833	ECJ3YB1E106M	C 10 UF, K, 25V	1	
C9837	ECJ3XB1C106M	C 1.0UF, K, 16V	1	
C9838	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9839	ECJ3YB1E106M	C 10 UF, K, 25V	1	
C9840	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9841,42	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C9843	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9844	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C9845,46	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9847,48	ECJ1VB1E104K	C 0.10UF, K, 25V	2	
C9880,81	ECJ1XB1H102K	C 1000UF, Z, 50V	2	
C9882	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9883	ECJ1VB1H822K	C 8200PF, K, 50V	1	
C9884	ECJ1VC1H100C	C 10PF, C, 50V	1	
C9885	ECJ1XB1H102K	C 1000UF, Z, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9886	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9887	ECJ1VB0J475K	C 4.7UF, K, 6.3V	1	
C9891	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9896	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9897	ECJ1VB1H822K	C 8200PF, K, 50V	1	
C9898	ECJ1VC1H100C	C 10PF, C, 50V	1	
C9899	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C9900-51	ECJ1XB1C104K	C 0.1UF, Z, 16V	52	
C9952-54	EEFCD0G560ER	56UF,	3	
C9955-59	ECJ1XB1C104K	C 0.1UF, Z, 16V	5	
C9960-64	ECJ3XB0J106M	C 10UF, M, 6.3V	5	
C9965	EEFCD0G560ER	56UF,	1	
C9966	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9967	ECJ1VB0J475K	C 4.7UF, K, 6.3V	1	
C9971	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
CB1-B8	K1MN68BA0002	68P CONNECTOR	8	
D3	K1KY40B00003	40P CONNECTOR	1	
D5	K1KB31BA0064	31P CONNECTOR	1	
D6	K1KA21A00011	21P CONNECTOR	1	
D20	K1KA20BA0296	20P CONNECTOR	1	
D25	K1KA20B00155	20P CONNECTOR	1	
D31,32	K1MN55BA0094	55P CONNECTOR	2	
D401	BOFBCT000004	DIODE	1	△
D404	BOEBKT000007	DIODE	1	△
D407	MA111	DIODE	1	
D411	BOBB17000009	DIODE	1	
D412	BOHAMM000122	DIODE	1	
D415	BOJAME000099	DIODE	1	
D416	BOHAMP000067	DIODE	1	
D417	BOHAPR000013	DIODE	1	
D418	B0BC8R100013	DIODE	1	
D419,20	BOHAPR000013	DIODE	2	
D423	MA188	DIODE	1	
D425	MA188	DIODE	1	
D429	ERA15-10	DIODE	1	
D430	MA111	DIODE	1	
D431,32	B0JCDD000002	DIODE	2	
D433	B0BC01400033	DIODE	1	
D435	ERA15-10	DIODE	1	
D436-38	MA4200M	ZENER DIODE	3	
D441	BOHAMM000122	DIODE	1	
D444	BOHAMM000122	DIODE	1	
D445	MA4360H	ZENER DIODE	1	
D501	BOHAPR000012	DIODE	1	
D503,04	MA165	DIODE	2	
D505	BOJAME000099	DIODE	1	
D506	MAZ80470LL	ZENER DIODE	1	
D507,08	B0BC7R400023	DIODE	2	
D509	B0JANG000018	DIODE	1	
D511	B0JAML000011	DIODE	1	
D512,13	MA111	DIODE	2	
D514	B0BC6R100025	DIODE	1	
D515	B0BC3R200008	DIODE	1	
D516-18	MA4330M	ZENER DIODE	3	
D520	MA111	DIODE	1	
D521	BOJAME000099	DIODE	1	
D528,29	MA153	DIODE	2	
D530	B0BC9R900013	DIODE	1	
D531	BOHBSN000013	DIODE	1	
D535	MA188	DIODE	1	
D536	B0JBSG000026	DIODE	1	
D538	B0BC5R100039	DIODE	1	
D539,40	B0AARR000010	DIODE	2	
D542	MA4200M	ZENER DIODE	1	
D543	B0BC01400033	DIODE	1	
D544,45	MA4200M	ZENER DIODE	2	
D549	B0BC02500008	DIODE	1	
D551	B0BC01300033	DIODE	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D555	B0BC7R400023	DIODE	1	
D559	B0BC7R400023	DIODE	1	
D563	B0BC6R100025	DIODE	1	
D569-72	B0BC02500008	DIODE	4	
D574	MA165	DIODE	1	
D575	MA188	DIODE	1	
D579	MA165	DIODE	1	
D582	MAZ705600F	ZENER DIODE	1	
D585	B0BC7R400023	DIODE	1	
D586	BOHAMP000067	DIODE	1	
D587	MA188	DIODE	1	
D588	B0BC3R200008	DIODE	1	
D590	B0BC3R200008	DIODE	1	
D596	ERA15-10	DIODE	1	
D598	B0BC5R100039	DIODE	1	
D599	B0JCND000009	DIODE	1	
D600	B0BC7R400023	DIODE	1	
D601	B0BC5R100039	DIODE	1	
D602	B0BC8R100013	DIODE	1	
D801	B0JCPD000026	DIODE	1	
D802,03	B0JCME000037	DIODE	2	
D805-10	B0JCPE000004	DIODE	6	
D850	MA165	DIODE	1	
D852	MA165	DIODE	1	
D854	MA165	DIODE	1	
D859	AK04	DIODE	1	
D2301-03	B0JCME000037	DIODE	3	
D2512	MA8043LTX	ZENER DIODE	1	
D2520	LNJ107W5PRW	LED	1	
D2524	MA8056-M	ZENER DIODE	1	
D3001	MA111	DIODE	1	
D3003,04	MA111	DIODE	2	
D3005	LNJ206R5ARA	LED	1	
D3007,08	MA111	DIODE	2	
D3061	MA728	DIODE	1	
D3501-04	MA3056M	ZENER DIODE	4	
D3507-10	MA8160H	ZENER DIODE	4	
D4701	MA728	DIODE	1	
D4704	MA3033	ZENER DIODE	1	
D4709	MA728	DIODE	1	
D4711-13	MA152K	DIODE	3	
D4721	MA3036H	ZENER DIODE	1	
D4732-35	MA152K	DIODE	4	
D4901	B0JCME000037	DIODE	1	
D4902,03	B0JCDD000002	DIODE	2	
D4904	B0JCME000037	DIODE	1	
D4905	B0JCDD000002	DIODE	1	
D4906	B0JCME000037	DIODE	1	
D6001	B0HBSN000008	DIODE	1	
D6021	B0HBSN000008	DIODE	1	
D6032	MA111	DIODE	1	
D6041	B0ECHP000003	DIODE	1	
D6051	B0ECHP000003	DIODE	1	
D6061,62	B0HBSN000008	DIODE	2	
D6071,72	B0HBSN000008	DIODE	2	
D6081,82	B0HBSN000008	DIODE	2	
D6091	B0HBSN000008	DIODE	1	
D6092	B0ECHP000003	DIODE	1	
D6101-04	B0JCME000037	DIODE	4	
D6131,32	B0ECHP000003	DIODE	2	
D6151-54	B0ECHP000003	DIODE	4	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D6191-93	B0EHP000003	DIODE	3	
D6211	B0JCME000037	DIODE	1	
D6221	B0EHP000003	DIODE	1	
D6222,23	MA111	DIODE	2	
D6251,52	MA8330M	ZENER DIODE	2	
D6253	LNJ301MPUJA	LED	1	
D6254	MA8051L	ZENER DIODE	1	
D6255	MA111	DIODE	1	
D6401,02	B0HBSN000008	DIODE	2	
D6431,32	B0HBSP000019	DIODE	2	
D6441	B0EHP000003	DIODE	1	
D6451	B0EHP000003	DIODE	1	
D6461,62	B0HBSN000008	DIODE	2	
D6466	MA111	DIODE	1	
D6471	B0HBSN000008	DIODE	1	
D6472	B0EHP000003	DIODE	1	
D6477	MA111	DIODE	1	
D6478	B0HCKS000002	DIODE	1	
D6480	MA111	DIODE	1	
D6481,82	B0HBSN000008	DIODE	2	
D6491	B0HBSP000019	DIODE	1	
D6497	MA111	DIODE	1	
D6501,02	B0EHP000003	DIODE	2	
D6521-24	B0EHP000003	DIODE	4	
D6581,82	MA8330M	ZENER DIODE	2	
D6583	LNJ301MPUJA	LED	1	
D6584	MA8051L	ZENER DIODE	1	
D6585	MA111	DIODE	1	
D6601	MA8240M	ZENER DIODE	1	
D6602	B0EHP000003	DIODE	1	
D6603	MA8240M	ZENER DIODE	1	
D6604	MA111	DIODE	1	
D6605	MA8051L	ZENER DIODE	1	
D6606	B0HCMM000014	DIODE	1	
D6607	MA111	DIODE	1	
D6610	MAZ81500ML	ZENER DIODE	1	
D6611-14	MA111	DIODE	4	
D6619,20	B0HCKS000002	DIODE	2	
D6621	B0HDSM000005	DIODE	1	
D6623,24	B0HDSM000005	DIODE	2	
D6641,42	B0HCKS000002	DIODE	2	
D6643	MA111	DIODE	1	
D6644	B0HCKS000002	DIODE	1	
D6661	MA111	DIODE	1	
D6662-64	MA8330M	ZENER DIODE	3	
D6665	MA8051L	ZENER DIODE	1	
D6666,67	MA111	DIODE	2	
D6671	MA111	DIODE	1	
D6682	B0HCMM000014	DIODE	1	
D6683,84	MA111	DIODE	2	
D6686,87	MA111	DIODE	2	
D6701,02	MA8056H	ZENER DIODE	2	
D6721	B0HCKS000002	DIODE	1	
D6723,24	B0JCME000037	DIODE	2	
D6725	B0EHP000003	DIODE	1	
D6726-33	MA8056H	ZENER DIODE	8	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D6734	MA111	DIODE	1	
D6752	B0JCME000037	DIODE	1	
D6758	B0EHP000003	DIODE	1	
D6760,61	MA111	DIODE	2	
D6771	B0JCME000037	DIODE	1	
D6773	B0HCKS000002	DIODE	1	
D6791	MA8200M	ZENER DIODE	1	
D6801,02	B0JCME000037	DIODE	2	
D6803	MA111	DIODE	1	
D6804	B0EHP000003	DIODE	1	
D6805	MA111	DIODE	1	
D6806	B0EHP000003	DIODE	1	
D6820-23	MA111	DIODE	4	
D6825	MA8330M	ZENER DIODE	1	
D6826	MA111	DIODE	1	
D6841	B0EHP000003	DIODE	1	
D6842,43	MA111	DIODE	2	
D6859	B0EHP000003	DIODE	1	
D6860	B0HCKS000002	DIODE	1	
D6861	MA8051L	ZENER DIODE	1	
D6862	MA111	DIODE	1	
D6871	MA8051L	ZENER DIODE	1	
D6872	MA111	DIODE	1	
D6901,02	MA8056H	ZENER DIODE	2	
D6903,04	B0EHP000003	DIODE	2	
D6951,52	MA8056H	ZENER DIODE	2	
D6953,54	B0EHP000003	DIODE	2	
D8001	MA111	DIODE	1	
D8003	MA111	DIODE	1	
D8010,11	MA153	DIODE	2	
D8180	MA111	DIODE	1	
D8181	MA8056-M	ZENER DIODE	1	
D8184,85	MA8056-M	ZENER DIODE	2	
D8200	MAZ31600ML	ZENER DIODE	1	PAVCA
D8201	MA111	DIODE	1	
D8203	MA3100M	ZENER DIODE	1	
D8204	MA111	DIODE	1	
D8209	MA111	DIODE	1	
D9017-19	MA3033	ZENER DIODE	3	
D9020	MA728	DIODE	1	
D9100-03	B0JCGD000002	DIODE	4	
D9105,06	B0JCGD000002	DIODE	2	
D9110	B0JCGD000002	DIODE	1	
D9300,01	MA152K	DIODE	2	
D9800	B0JCME000037	DIODE	1	
D9801	B0JCDD000002	DIODE	1	
D9802	MA728	DIODE	1	
D9804	MA152K	DIODE	1	
D9807,08	MA152K	DIODE	2	
D9811	MA728	DIODE	1	
D9812	B0JCME000037	DIODE	1	
D9813	B0JCDD000002	DIODE	1	
D9814	B0JCME000037	DIODE	1	
D9815	B0JCDD000002	DIODE	1	
DA1	K1KA20AA0335	20P CONNECTOR	1	
DA2	K1KY40B00003	40P CONNECTOR	1	
DA3	K1KA30AA0009	30P CONNECTOR	1	
DA4	K1KA14A00248	14P CONNECTOR	1	
DA5	K1KB21BA0063	21P CONNECTOR	1	
DA6	K1KA31A00007	31P CONNECTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
DA11	K1KA21A00011	21P CONNECTOR	1	
FL3000-04	FLJ1E1040022	C 0.10UF, Z, 25V	5	
FL3006-08	FLJ1E1040022	C 0.10UF, Z, 25V	3	
FL3010	FLJ1E1040022	C 0.10UF, Z, 25V	1	
FL4001	J0MAB0000175	LC FILTER	1	
FL4502-04	FLJ1E1040022	C 0.10UF, Z, 25V	3	
FL4703	FLJ1E1040022	C 0.10UF, Z, 25V	1	
FL4705-09	FLJ1E1040022	C 0.10UF, Z, 25V	5	
FL7101	J0HABH000013	LC FILTER	1	
FL7201	J0HABH000013	LC FILTER	1	
FL8000	FLJ1E1040022	C 0.10UF, Z, 25V	1	
FL9300, 01	FLJ1E1040022	C 0.10UF, Z, 25V	2	
FL9800, 01	J0HABH000013	LC FILTER	2	
FL9803, 04	J0HABH000012	LC FILTER	2	
FL9805-07	J0HABH000013	LC FILTER	3	
FL9900-02	FLJ1E1040022	C 0.10UF, Z, 25V	3	
FL9903, 04	J0HABH000013	LC FILTER	2	
GK3	K1KA03BA0061	3P CONNECTOR	1	
HX1	K1KB22A00036	22P CONNECTOR	1	
IC401	CNC1S171R	IC	1	△
IC402	C0DAEMB00004	IC	1	
IC403-05	CNC1S171R	IC	3	△
IC406	C0DAZZZ00021	IC	1	
IC408	CNC1S171R	IC	1	△
IC409	MIP2G40MPSCF	IC	1	△
IC410	CNC1S171R	IC	1	△
IC411	C0DAEMB00004	IC	1	
IC412	CNC1S171R	IC	1	△
IC501	C2ABDB000110	IC	1	
IC502	C0EBH0000210	IC	1	
IC504	C0DAEMB00004	IC	1	
IC505	CNC1S171R	IC	1	
IC506	C0ZBZ0000878	IC	1	
IC507	CNC1S171R	IC	1	
IC509	C0DABZZ00010	IC	1	
IC510	C0DBAZG00034	IC	1	
IC512	C0DAEMB00004	IC	1	
IC520	LSSK0062	IC	1	
IC801-03	C0DBAMH00013	IC	3	
IC804	C0CBCAC00275	IC	1	
IC850	C0DAAZG00014	IC	1	
IC2301, 02	C1AB00002534	IC	2	PAVCA
IC2303	C1BB00001006	IC	1	
IC2305	C0ABBA000168	IC	1	
IC3001	C1AB00002530	IC	1	PAVCA
IC3002	C0JBBR000002	IC	1	
IC3003	CXA1315M	LINEAR IC	1	
IC3004	CXA1875AM	LINEAR IC	1	
IC3005	C1AB00002529	IC	1	PAVCA
IC3006	MC14052BF	MOS IC (CMOS GATE ARRLY)	1	
IC3007, 08	C0JBAS000215	IC	2	
IC3101	C1AB00002238	IC	1	
IC3150-52	C0JBAA000419	IC	3	
IC3502	C3EBCC000068	IC	1	PAVCA
IC4001	C0FBAY000012	IC	1	PAVCA
IC4002	C0DBEGE00002	IC	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC4031, 32	C0JBAE000354	IC	2	
IC4201	C1ZBZ0003233	IC	1	PAVCA
IC4301	C0JBAP000020	IC	1	
IC4500	C1ZBZ0002769	IC	1	
IC4501	MN845111-A	IC	1	
IC4502	C3ABQJ000031	IC	1	
IC4671	C0ZBZ0001410	IC	1	PAVCA
IC4701	MN103SB30RGL	IC	1	PAVCA
IC4702	TVRN928	IC	1	PAVCA
IC4703	C3EBJC000059	IC	1	
IC4704	C0EBE0000447	IC	1	
IC4711	C0JBAE000354	IC	1	
IC4714	C0JBAZ000856	IC	1	
IC4715	C0JBAE000354	IC	1	
IC4803	C0JBAS000215	IC	1	
IC4901	C0DBAHD00011	IC	1	
IC4951, 52	C0DBAYY00054	IC	2	
IC4953	C0CBCAD00016	IC	1	
IC4955	C0DBAYY00054	IC	1	
IC4956	C0CBCBC00190	IC	1	
IC4957	C0DBAHD00011	IC	1	
IC6131	C0ZBZ0000895	IC	1	
IC6151	C0ZBZ0001324	IC	1	
IC6191	C0ZBZ0000895	IC	1	
IC6211	C0ZBZ0001325	IC	1	
IC6221	C0DBEMB00005	IC	1	
IC6241	C0JBAZ000005	IC	1	
IC6251	NJM2903M	INTEGRATED CIRCUIT	1	
IC6471	C0DBEKA00003	IC	1	
IC6472	C0JBAA000377	IC	1	
IC6501	C0ZBZ0000895	IC	1	
IC6521	C0ZBZ0001324	IC	1	
IC6561, 62	C0JBAZ000005	IC	2	
IC6581	NJM2903M	INTEGRATED CIRCUIT	1	
IC6601	C0ZBZ0001325	IC	1	
IC6602	C0JBAB000715	IC	1	
IC6610	NJM2903M	INTEGRATED CIRCUIT	1	
IC6671	C0ZBZ0001325	IC	1	
IC6681	C0ZBZ0001325	IC	1	
IC6682	C0JBAA000377	IC	1	
IC6721, 22	C0JBAZ000994	IC	2	
IC6724, 25	C0CBADC00089	IC	2	
IC6751	C0CBADC00089	IC	1	
IC6752	C0ZBZ0001325	IC	1	
IC6753	C0JBAB000715	IC	1	
IC6771	C0CBADC00089	IC	1	
IC6772	C0ZBZ0001325	IC	1	
IC6773, 74	C0JBAA000377	IC	2	
IC6791	N0BF1FB00001	IC	1	
IC6801, 02	C0DBEMB00005	IC	2	
IC6821	C0DBEMB00005	IC	1	
IC6841	C0DBEMB00005	IC	1	
IC6861	NJM2903M	INTEGRATED CIRCUIT	1	
IC6871	NJM2903M	INTEGRATED CIRCUIT	1	
IC6901-06	AN16072A-VT	IC	6	
IC6951-56	AN16072A-VT	IC	6	
IC7101-05	C0JBAZ001120	IC	5	
IC7201-05	C0JBAZ001120	IC	5	
IC8001	MC14052BF	MOS IC (CMOS GATE ARRLY)	1	
IC8003	C1AA00000706	IC	1	
IC8005	C0JBAB000646	IC	1	
IC8007	C0JBAR000419	IC	1	
IC8009	C0JBAS000215	IC	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC8014	C0ZBZ0000911	IC	1	
IC8016	C0JBAZ001934	IC	1	
IC8100	C0DBEJG00001	IC	1	
IC8181	C1DB00001208	IC	1	
IC9001	TVRP016	IC	1	PAVCA
IC9002	C0ZBZ0001330	IC	1	
IC9003	TVRN992	IC	1	
IC9007	TVRP012	IC	1	
IC9011	C0EBF0000431	IC	1	
IC9200	C1ZBZ0003185	IC	1	
IC9303	TVRN821S	IC	1	PAVCA
IC9500	C1ZBZ0002599	IC	1	
IC9502	PST9128NR	IC (LOGIC)	1	
IC9503, 04	C0JBAZ001120	IC	2	
IC9800	C0DBAYY00054	IC	1	
IC9801	C0DBZFG00066	IC	1	
IC9802, 03	C0JBAZ001120	IC	2	
IC9806	C0DBAHD00011	IC	1	
IC9807	C0DBAYY00054	IC	1	
IC9809	C0DBAYY00054	IC	1	
IC9900	MN84521-A	IC	1	
IC9901	C3ABQJ000051	IC	1	
J1	K1KA20B00163	20P CONNECTOR	1	PAVCA
J2	K1KA06BA0047	6P CONNECTOR	1	
J3	K1KA30B00078	30P CONNECTOR	1	PAVCA
J4	K1KA11BA0051	11P CONNECTOR	1	
J5	K1KA21B00008	21P CONNECTOR	1	
J6	K1KA21B00009	21P CONNECTOR	1	
J7,J8	K1KA03BA0055	3P CONNECTOR	2	
J10	K1KA06BA0050	6P CONNECTOR	1	
J11-13	K1KB80B00024	80P CONNECTOR	3	
J14	K1KA22A00067	22P CONNECTOR	1	
J15	K1KA03BA0047	3P CONNECTOR	1	
J30	K1KA05BA0050	5P CONNECTOR	1	PAVCA
JK3509	K1FB109BA018	CONNECTOR	1	
JK3511	K1FB115BA020	CONNECTOR	1	
JK3513	K2HC103B0105	JACK	1	
JS8094	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS8096	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
K1	K1KY12B00001	12P CONNECTOR	1	
L403	EXCELSA35	BEAD CHOKE	1	
L404,05	G0B123K00004	CHOKE COIL	2	△
L410	ELF17N004A	LINE FILTER	1	△
L510	EXCELDLR25C	BEAD CHOKE	1	
L511	G0A470ZA0033	CHOKE COIL	1	
L512	ELESE4R7JA	PEAKING COIL	1	
L513	EXCELDLR25C	BEAD CHOKE	1	
L514	G0A100GA0013	CHOKE COIL	1	
L801	G1A101ZA0007	CHOKE COIL	1	PAVCA
L802	G1C101MA0167	INDUCTION COIL	1	PAVCA
L803	G1C220MA0167	INDUCTION COIL	1	PAVCA
L804,05	J0JHC0000078	CHIP INDUCTOR	2	
L807-11	J0JHC0000078	CHIP INDUCTOR	5	
L851	G0A680ZA0047	CHOKE COIL	1	
L2330,31	G0A221ZA0041	CHOKE COIL	2	
L3002	G1C100K00020	INDUCTION COIL	1	
L3005,06	G1C100K00020	INDUCTION COIL	2	
L3050	G1C100K00020	INDUCTION COIL	1	
L3140	J0JHC0000078	CHIP INDUCTOR	1	
L3507-09	J0HABB000004	LC FILTER	3	
L3510-17	TLK212T256AL	EMI FILTER	8	
L3526	ELJPA100KFB	CHIP INDUCTOR	1	
L3555	ELJPA100KFB	CHIP INDUCTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L4206	J0JHC0000096	CHIP INDUCTOR	1	
L4301-03	J0JHC0000078	CHIP INDUCTOR	3	
L4501	G1C150KA0038	INDUCTION COIL	1	
L4502-05	J0JHC0000096	CHIP INDUCTOR	4	
L4671	G1C150KA0038	INDUCTION COIL	1	
L4701-04	J0JHC0000096	CHIP INDUCTOR	4	
L4901	G1C3R3MA0175	INDUCTION COIL	1	PAVCA
L4902	G1C3R0MA0248	INDUCTION COIL	1	
L4903	G1C2R2MA0248	INDUCTION COIL	1	PAVCA
L6001-03	G0C1R9KA0147	PEAKING COIL	3	
L6011-13	G0C1R9KA0147	PEAKING COIL	3	
L6061-68	G0ZZ00002183	PEAKING COIL	8	
L6081-88	G0ZZ00002183	PEAKING COIL	8	
L6101,02	J0JJC0000011	CHIP INDUCTOR	2	
L6103	G0ZZ00002183	PEAKING COIL	1	
L6104,05	J0JJC0000011	CHIP INDUCTOR	2	
L6211,12	J0JJC0000011	CHIP INDUCTOR	2	
L6221	G0ZZ00002183	PEAKING COIL	1	
L6241	G0ZZ00002183	PEAKING COIL	1	
L6262	G0ZZ00002183	PEAKING COIL	1	
L6271,72	G0ZZ00002183	PEAKING COIL	2	
L6401-03	G0C1R9KA0147	PEAKING COIL	3	
L6411-13	G0C1R9KA0147	PEAKING COIL	3	
L6461-68	G0ZZ00002183	PEAKING COIL	8	
L6472,73	G0ZZ00002183	PEAKING COIL	2	
L6481-88	G0ZZ00002183	PEAKING COIL	8	
L6591,92	G0ZZ00002183	PEAKING COIL	2	
L6601,02	G0ZZ00002183	PEAKING COIL	2	
L6801,02	J0JJC0000011	CHIP INDUCTOR	2	
L6841	J0JJC0000011	CHIP INDUCTOR	1	
L8001	G1C100K00020	INDUCTION COIL	1	
L8003	G1C100K00020	INDUCTION COIL	1	
L8005	G1C100K00020	INDUCTION COIL	1	
L8101-08	J0JHC0000078	CHIP INDUCTOR	8	
L9500	G1C150KA0038	INDUCTION COIL	1	
L9501,02	J0JHC0000078	CHIP INDUCTOR	2	
L9800	G1C3R0MA0248	INDUCTION COIL	1	
L9801,02	G1C2R2MA0241	INDUCTION COIL	2	
L9810	J0JHC0000045	CHIP INDUCTOR	1	
P2	K1KA02A00626	2P CONNECTOR	1	
P5	K1KA11AA0194	11P CONNECTOR	1	
P9	K1KA03AA0537	3P CONNECTOR	1	
P10	K1KA06A00452	6P CONNECTOR	1	
P11	K1KA02A00626	2P CONNECTOR	1	
P12	K1KA10AA0194	10P CONNECTOR	1	
P23	K1KA03AA0193	3P CONNECTOR	1	
P25	K1KA20AA0178	20P CONNECTOR	1	
PA4901	K5H4022A0023	FUSE	1	
PA9800	K5H4022A0023	FUSE	1	
PB30	K1KA05AA0193	5P CONNECTOR	1	
PB31	K1KA03AA0192	3P CONNECTOR	1	
PB33	K1KA03AA0192	3P CONNECTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
PB35	K1KA03AA0192	3P CONNECTOR	1	
PC6480	B3PBA0000223	IC	1	
PC6701-03	B3PBA0000233	IC	3	
PC6704	B3PBA0000234	IC	1	
PC6705	B3PBA0000233	IC	1	
PC6760	B3PBA0000223	IC	1	
PC6801	B3PBA0000223	IC	1	
PC6861	B3PBA0000223	IC	1	
PC6871	B3PBA0000223	IC	1	
PMM1	TMM7464-2	CLAMPER	1	
PMM2,M3	TMME088	CLAMPER	2	
PMM4-M6	TMM7464-2	CLAMPER	3	
PMM7	TMME047	CLAMPER	1	
PR401	K5Y502BA0001	FUSE	1	△
PR505	K5H5022A0023	FUSE	1	△
PR509	ERBSEOR50U	FUSE	1	△
PR601	K5G312B00012	FUSE	1	△
Q401	B1CHND000004	TRANSISTOR	1	
Q402	B1DFDD000019	TRANSISTOR	1	
Q404	B1BCCF000022	TRANSISTOR	1	
Q406	B1DEKQ000003	TRANSISTOR	1	△
Q407	B1HFCFA00021	TRANSISTOR	1	
Q408,09	B1DHCD000034	TRANSISTOR	2	
Q412,13	B1DEGQ000070	TRANSISTOR	2	△
Q418	2SD1819A	TRANSISTOR	1	
Q420-22	2SD1819A	TRANSISTOR	3	
Q434	B1CEJQ000003	TRANSISTOR	1	
Q501,02	2SD1820A	TRANSISTOR	2	
Q505	B1CEJQ000002	TRANSISTOR	1	
Q507	B1DAGQ000013	TRANSISTOR	1	
Q508	B1HBCFA00033	TRANSISTOR	1	
Q509	B1HDCEA00001	TRANSISTOR	1	
Q510	B1DHBD000005	TRANSISTOR	1	
Q512	B1CBGD000001	FET	1	
Q517	B1HBCFA00033	TRANSISTOR	1	
Q520	B1HBCFA00033	TRANSISTOR	1	
Q521	B1CBGD000001	FET	1	
Q524	B1CFGF000008	TRANSISTOR	1	
Q525	B1CBGD000001	FET	1	
Q527	B1CERL000005	TRANSISTOR	1	
Q530	2SD1819A	TRANSISTOR	1	
Q535	2SD1819A	TRANSISTOR	1	
Q537	B1DFDD000019	TRANSISTOR	1	
Q538	B1CBGD000001	FET	1	
Q540	B1DHCD000034	TRANSISTOR	1	
Q541	B1CBGD000001	FET	1	
Q551	B1CBGD000001	FET	1	
Q553	2SD1819A	TRANSISTOR	1	
Q554	B1DHCD000034	TRANSISTOR	1	
Q555,56	B1DFGD000045	TRANSISTOR	2	
Q557-59	2SD1819A	TRANSISTOR	3	
Q561	2SD1819A	TRANSISTOR	1	
Q563	B1CFGF000008	TRANSISTOR	1	
Q564,65	2SB1218ARL	TRANSISTOR	2	
Q566	2SD1819A	TRANSISTOR	1	
Q568	B1CHGD000006	TRANSISTOR	1	
Q569	B1CBGD000001	FET	1	
Q850	2SC3311A	TRANSISTOR	1	
Q2300	B1BBCF000028	TRANSISTOR	1	
Q2331	B1BBCF000028	TRANSISTOR	1	
Q2372	2SD601A	TRANSISTOR	1	
Q2510,11	2SD601A	TRANSISTOR	2	
Q2513	2SD601A	TRANSISTOR	1	
Q3001	2SB709A	TRANSISTOR	1	
Q3004	2SD601A	TRANSISTOR	1	
Q3531,32	2SD601A	TRANSISTOR	2	
Q4701	B1CBHD000002	FET	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q4702-07	2SD601A	TRANSISTOR	6	
Q4709,10	2SD601A	TRANSISTOR	2	
Q4712-14	2SD601A	TRANSISTOR	3	
Q4801	B1CBHD000002	FET	1	
Q4802,03	2SD601A	TRANSISTOR	2	
Q4901-03	B1MBEDA00015	TRANSISTOR	3	
Q4961,62	2SD601A	TRANSISTOR	2	
Q6001-03	B1JADN000001	TRANSISTOR	3	
Q6021-23	B1JADN000001	TRANSISTOR	3	
Q6041,42	B1JADN000002	TRANSISTOR	2	
Q6051,52	B1JADN000002	TRANSISTOR	2	
Q6101-04	B1DFKM000002	TRANSISTOR	4	
Q6105	B1ABNF000006	TRANSISTOR	1	
Q6106	B1ADNF000006	TRANSISTOR	1	
Q6111	2SK326800L	FET	1	
Q6112	B1DFKM000002	TRANSISTOR	1	
Q6114	B1DFKM000002	TRANSISTOR	1	
Q6141	B1ABNF000006	TRANSISTOR	1	
Q6142	B1ADNF000006	TRANSISTOR	1	
Q6146	B1ABNF000006	TRANSISTOR	1	
Q6147	B1ADNF000006	TRANSISTOR	1	
Q6171	2SD2185	TRANSISTOR	1	
Q6172	B1ADRD000001	TRANSISTOR	1	
Q6181	2SD2185	TRANSISTOR	1	
Q6182	B1ADRD000001	TRANSISTOR	1	
Q6221	2SD1263A	TRANSISTOR	1	
Q6222	2SC3063	TRANSISTOR	1	
Q6251	2SD601A	TRANSISTOR	1	
Q6401-03	B1JADN000001	TRANSISTOR	3	
Q6421-23	B1JAEP000001	TRANSISTOR	3	
Q6441,42	B1JADN000002	TRANSISTOR	2	
Q6451,52	B1JADP000002	TRANSISTOR	2	
Q6471	B1CHGD000006	TRANSISTOR	1	
Q6511	B1ABNF000006	TRANSISTOR	1	
Q6512	B1ADNF000006	TRANSISTOR	1	
Q6516	B1ABNF000006	TRANSISTOR	1	
Q6517	B1ADNF000006	TRANSISTOR	1	
Q6531	2SD2185	TRANSISTOR	1	
Q6532	B1ADRD000001	TRANSISTOR	1	
Q6551	2SD2185	TRANSISTOR	1	
Q6552	B1ADRD000001	TRANSISTOR	1	
Q6581	2SD601A	TRANSISTOR	1	
Q6601	B1DFES000003	TRANSISTOR	1	
Q6602	2SD601A	TRANSISTOR	1	
Q6621,22	B1DFKM000001	TRANSISTOR	2	
Q6641,42	B1DFKM000001	TRANSISTOR	2	
Q6644,45	B1DFKM000001	TRANSISTOR	2	
Q6647,48	B1DFKM000001	TRANSISTOR	2	
Q6661	B1DEET000002	TRANSISTOR	1	
Q6662	2SD601A	TRANSISTOR	1	
Q6663	2SD2185	TRANSISTOR	1	
Q6671,72	B1DFET000001	TRANSISTOR	2	
Q6680	B1ADNF000006	TRANSISTOR	1	
Q6681,82	2SK389500L	FET	2	
Q6691	2SK620	FET	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q6742,43	2SD601A	TRANSISTOR	2	
Q6744	2SK620	FET	1	
Q6762	B1ADNF000006	TRANSISTOR	1	
Q6781	B1ABNF000006	TRANSISTOR	1	
Q6782	B1ADNF000006	TRANSISTOR	1	
Q6791	2SD601A	TRANSISTOR	1	
Q6801	B1BAEJ000014	TRANSISTOR	1	
Q6802	2SB0709A	TRANSISTOR	1	
Q6803	2SD814A	TRANSISTOR	1	
Q6804	2SD601A	TRANSISTOR	1	
Q6821	2SD1263A	TRANSISTOR	1	
Q6822	2SC3063	TRANSISTOR	1	
Q6824	2SD601A	TRANSISTOR	1	
Q6841	2SD1263A	TRANSISTOR	1	
Q6842	2SC1473A	TRANSISTOR	1	
Q8002	2SD601A	TRANSISTOR	1	
Q8010	2SD601A	TRANSISTOR	1	
Q8011	2SB709A	TRANSISTOR	1	
Q8012	2SD601A	TRANSISTOR	1	
Q8013	2SB709A	TRANSISTOR	1	
Q8019	2SD601A	TRANSISTOR	1	
Q8181-84	B1CBHD000002	FET	4	
Q8200-02	2SD601A	TRANSISTOR	3	
Q9010	2SD601A	TRANSISTOR	1	
Q9044	2SD601A	TRANSISTOR	1	
Q9046	2SD601A	TRANSISTOR	1	
Q9049	2SB709A	TRANSISTOR	1	
Q9050-54	2SD601A	TRANSISTOR	5	
Q9055-58	B1CBHD000002	FET	4	
Q9300-02	2SD601A	TRANSISTOR	3	
Q9800,01	B1MBEDA00015	TRANSISTOR	2	
Q9803	B1MBEDA00015	TRANSISTOR	1	
Q9805,06	2SD601A	TRANSISTOR	2	
R401	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R402	ERJ6GEYJ821	M 820 OHM,J,1/10W	1	
R403	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R404	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R406	ERX12SJ2R2V	M 2.2 OHM, J,1/2W	1	
R407	ERJ8ENF4303	M 43KOHM, 1/8W	1	
R410	D1F5100E0003	CHIP RESISTOR	1	△
R412	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R413	D1F5100E0003	CHIP RESISTOR	1	△
R414	ERJ8GEYJ153	M 15KOHM, J,1/8W	1	
R415	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R416	ERJ6GEYJ305	M 3MOHM,J,1/10W	1	
R417	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R418	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
R419	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R420	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R421	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R422	ERJ6GEYJ334	M 330KOHM,J,1/10W	1	
R423	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R424	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R425	ERJ6ENF3902	M 39KOHM, 1/10W	1	
R426	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R427	ERJ8ENF4303	M 43KOHM, 1/8W	1	
R428	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R429	ERJ6GEYJ4R7	M 4.7 OHM,J,1/10W	1	
R430	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R431	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R432	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R433	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R434	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R435	ERJ8ENF4303	M 43KOHM, 1/8W	1	
R436	ERJ8GEYJ153	M 15KOHM, J,1/8W	1	
R437	ERJ6GEYJ183	M 18KOHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R438	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R439	ERG12SJ120	M 12 OHM, J,1/2W	1	
R440	ERJ8GEYJ474	M 470KOHM, J,1/8W	1	
R441,42	ERJ6EKF6803	M 680KOHM, 1/10W	2	
R443	EVMAASA00B23	CONTROL 2KOHMB	1	
R444	ERJ6GEYJ123	M 12KOHM,J,1/10W	1	
R448,49	DOXGR08J0001	M 0.08OHM,J, 5W	2	
R450	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R451	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R452	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R453	ERJ6GEYJ305	M 3MOHM,J,1/10W	1	
R454	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R455	ERJ6GEYJ123	M 12KOHM,J,1/10W	1	
R456	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R458	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R459	ERJ6EKF6803	M 680KOHM, 1/10W	1	
R461	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R462	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R463	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R464	ERJ6ENF3302	M 33KOHM, 1/10W	1	
R465	ERJ6ENF5603	M 560KOHM, 1/10W	1	
R467	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R471	ERJ8GEYJ332	M 3.3KOHM, J,1/8W	1	
R472,73	ERJ6ENF5603	M 560KOHM, 1/10W	2	
R475	ERJ6EKF6803	M 680KOHM, 1/10W	1	
R476,77	ERJ14YJ181U	M 181 OHM, J,1/4W	2	
R478	ERJ8GEYJ220	M 22 OHM, J,1/8W	1	
R480	ERJ6ENF4702	M 47KOHM, 1/10W	1	
R482	ERJ8GEYJ220	M 22 OHM, J,1/8W	1	
R483	DOB225JA030	M 22MOHM,J,0.05W	1	△
R487	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R488	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R490,91	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R492	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R493	ERG12SJ120	M 12 OHM, J,1/2W	1	
R494-96	ERJ6ENF5603	M 560KOHM, 1/10W	3	
R497	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R498	ERG38SJ101	M 100 OHM, J, 3W	1	
R499	DOB2394JA029	M 390KOHM,J,0.05W	1	△
R501	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R502,03	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R504	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R505	ERJ8GEYJ330	M 33 OHM, J,1/8W	1	
R506	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R507	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R508	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R509-11	ERJ6GEYJ104	M 100KOHM,J,1/10W	3	
R512	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R513,14	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R515,16	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R517	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R518	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R519,20	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R521,22	ERJ8GEYJ100	M 10 OHM, J,1/8W	2	
R523	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R524	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R525	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R526,27	ERJ8GEYJ224	M 220KOHM, J,1/8W	2	
R528	ERJ6GEYJ4R7	M 4.7 OHM,J,1/10W	1	
R529	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R530	ERJ6RBD3302	M 33KOHM,F,1/10W	1	
R532	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R533	ERJ6GEYJ163	M 16KOHM,J,1/10W	1	
R534	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R535,36	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R537	ERJ6ENF1003	M 100KOHM, 1/10W	1	
R538	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R539	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R540,41	ERJ6GEYJ105	M 1MOHM,J,1/10W	2	
R542	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R543	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R544	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R545	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R546	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R547	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R548	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R549	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R550	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R551	ERJ6GEYJ334	M 330KOHM,J,1/10W	1	
R552	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R553	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R554	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R555,56	ERJ6GEYJ105	M 1MOHM,J,1/10W	2	
R557	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R558	ERJ6GEYJ474	M 47KOHM,J,1/10W	1	
R559	ERJ6ENF8201	M 8.2KOHM, 1/10W	1	
R560	ERJ6ENF9101	M 9.1KOHM, 1/10W	1	
R561	ERJ6ENF5101	M 5.1KOHM, 1/10W	1	
R562	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
R563	ERJ6GEYJ2R2	M 2.2 OHM,J,1/10W	1	
R564	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R565,66	ERJ6GEYJ105	M 1MOHM,J,1/10W	2	
R567,68	ERJ8ENF1004	M 100KOHM, 1/8W	2	
R569	ERJ6ENF3302	M 33KOHM, 1/10W	1	
R570	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R571	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R572,73	ERJ8ENF3900	M 390 OHM, 1/8W	2	
R574	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R575	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R576	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R577,78	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R579	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R580,81	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R582	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R583	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R584	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R585	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R586	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R587	ERJ8RSJR16V	M 16 OHM, 1/8W	1	
R588	ERJ8ENF3900	M 390 OHM, 1/8W	1	
R589,90	ERJ8GEYJ123	M 12KOHM, J,1/8W	2	
R591	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R592	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R593	ERJ6ENF5601	M 5.6KOHM, 1/10W	1	
R594	ERJ6GEYJ151	M 150 OHM,J,1/10W	1	
R595	ERJ8GEYJ222	M 2.2KOHM, J,1/8W	1	
R596	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R597,98	ERJ6ENF3302	M 33KOHM, 1/10W	2	
R599,00	ERJ8ENF3900	M 390 OHM, 1/8W	2	
R601	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R602	ERJ6ENF3301	M 3.3KOHM, 1/10W	1	
R603	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R606	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R607	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R608	ERJ8GEYJ332	M 3.3KOHM, J,1/8W	1	
R609	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R610,11	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R612	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R613	ERJ6ENF2702	M 27KOHM, 1/10W	1	
R614	ERJ6ENF3301	M 3.3KOHM, 1/10W	1	
R615	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R616,17	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R618	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R619	ERJ8RQJR39	M0.39 OHM, 1/8W	1	
R620	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R621	ERJ8GEYJ123	M 12KOHM, J,1/8W	1	
R622	ERJ8ENF1503	M 15KOHM, 1/8W	1	
R624	ERX2SJR22	M0.22 OHM, J, 2W	1	
R626	ERJ8ENF1503	M 15KOHM, 1/8W	1	
R627	ERJ6GEYJ752	M 7.5KOHM,J,1/10W	1	
R628	EVMAASA00B33	CONTROL 3KOHMB	1	
R629	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R630	ERJ8GEYJ472	M 4.7KOHM, J,1/8W	1	
R631	ERJ8GEYJ333	M 33KOHM, J,1/8W	1	
R632	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R633	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R634	ERJ8RQJR39	M0.39 OHM, 1/8W	1	
R636	ERJ8ENF1503	M 15KOHM, 1/8W	1	
R637	ERJ8RQJR39	M0.39 OHM, 1/8W	1	
R638	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R639,40	ERJ8RQJR39	M0.39 OHM, 1/8W	2	
R641	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R642-44	ERJ8RQJR39	M0.39 OHM, 1/8W	3	
R645	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R646,47	ERJ8GEYJ223	M 22KOHM, J,1/8W	2	
R648	ERJ8ENF1503	M 15KOHM, 1/8W	1	
R649	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R650	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R651,52	ERJ6ENF1002	M 10KOHM, 1/10W	2	
R653	ERJ6ENF3302	M 33KOHM, 1/10W	1	
R654	ERJ8GEYJ220	M 22 OHM, J,1/8W	1	
R655	ERJ8RSJR16V	M 16 OHM, 1/8W	1	
R656	ERJ6ENF4702	M 47KOHM, 1/10W	1	
R657	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R658	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R659	ERJ6ENF3002	M 30KOHM, 1/10W	1	
R660	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R661	EVMEASA00B53	CONTROL 5KOHMB 0.3W	1	
R662	ERJ6ENF1503	M 150KOHM, 1/10W	1	
R664	ERJ6ENF9101	M 9.1KOHM, 1/10W	1	
R665	EVMEASA00B23	CONTROL 2KOHMB 0.3W	1	
R666	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R667,68	ERJ8GEYOR00	M 0 OHM, 1/8W	2	
R669	ERJ6ENF1303	M 130KOHM, 1/10W	1	
R670	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R671	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
R672,73	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R674	ERJ8GEYJ333	M 33KOHM, J,1/8W	1	
R675	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R676	ERJ8GEYJ333	M 33KOHM, J,1/8W	1	
R677	ERJ6GEYJ474	M 470KOHM,J,1/10W	1	
R678	ERJ8GEYOR00	M 0 OHM, 1/8W	1	
R679,80	ERJ8RSJR16V	M 16 OHM, 1/8W	2	
R682	ERJ6ENF2002	M 20KOHM, 1/10W	1	
R683	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R684	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R685,86	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R687	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R688,89	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R690	ERJ6GEYJ477	M 4.7 OHM,J,1/10W	1	
R691	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R692	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R693	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R695	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R696	ERJ8GEYJ100	M 10 OHM, J,1/8W	1	
R697	ERJ6GEYJ477	M 4.7 OHM,J,1/10W	1	
R698	ERJ8RSJR16V	M 16 OHM, 1/8W	1	
R699-08	ERJ8GEYJ105	M 1MOHM, J,1/8W	10	
R711	ERJ8RSJR16V	M 16 OHM, 1/8W	1	
R712	ERJ6GEYJ477	M 4.7 OHM,J,1/10W	1	
R713	ERJ8GEYJ472	M 4.7KOHM, J,1/8W	1	
R714	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R715	ERDS2TJ101	C 100 OHM, J,1/4W	1	
R802	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R803	ERJ3EKF6802	M 68KOHM, 1/16W	1	
R804	ERJ3GEYJ823	M 82KOHM,J,1/16W	1	
R805	ERJ3EKF8452	M84.5KOHM, 1/16W	1	
R806	ERJ3EKF1052	M10.5KOHM, 1/16W	1	
R810	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R811	ERJ3EKF6802	M 68KOHM, 1/16W	1	
R812	ERJ3GEYJ683	M 68KOHM,J,1/16W	1	
R813	ERJ3EKF4222	M42.2KOHM, 1/16W	1	
R814	ERJ3EKF1052	M10.5KOHM, 1/16W	1	
R818	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R819	ERJ3EKF6802	M 68KOHM, 1/16W	1	
R820	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R821	ERJ3EKF2432	M24.3KOHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R822	ERJ3EKF1052	M10.5KOHM, 1/16W	1	
R825-27	ERJ3GEYJ822	M 8.2KOHM,J,1/16W	3	
R828	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R829	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R830	ERJ6ENF8451	M8.45KOHM, 1/10W	1	
R838	ERJ12YJ330	M 33 OHM,J, 1/2W	1	
R840	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R850	ER0S2CKF4701	M 4.7KOHM, F,1/4W	1	
R851	ERDS2TJ332	C 3.3KOHM, J,1/4W	1	
R852	ERDS2TJ473	C 47KOHM, J,1/4W	1	
R853	ERDS2TJ471	C 470 OHM, J,1/4W	1	
R854	ERDS2TJ122	C 1.2KOHM, J,1/4W	1	
R856	ERDS2TJ122	C 1.2KOHM, J,1/4W	1	
R858	ERDS2TJ122	C 1.2KOHM, J,1/4W	1	
R862	ER0S2CHF7501	M 7.5KOHM, F,1/4W	1	
R863	ER0S2CKF9100	M 910 OHM, F,1/4W	1	
R921	ERJ6RBD3302	M 33KOHM,F,1/10W	1	
R922	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R931	ERJ6ENF3002	M 30KOHM, 1/10W	1	
R932	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R933	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R935	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R936	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R937	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R938	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R939,40	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R943	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R945	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R946	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R947	ERJ8GEYJ331	M 330 OHM, J,1/8W	1	
R950	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R951,52	ERJ8GEYJ100	M 10 OHM, J,1/8W	2	
R953	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R955	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R956	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R2351-54	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R2355-60	ERDS1FJ2R2	C 2.2 OHM, J,1/2W	6	
R2361,62	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R2364	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2366	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2367,68	ERJ3GEYJ560	M 56 OHM,J,1/16W	2	
R2383	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2384	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R2386	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R2387,88	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R2389-92	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R2393	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
R2394-96	ERJ6GEYJ103	M 10KOHM,J,1/10W	3	
R2397	ERJ6GEYJ512	M 5.1KOHM,J,1/10W	1	
R2398	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2399,00	ERJ6GEYJ220	M 22 OHM,J,1/10W	2	
R2404-07	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R2408-11	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
R2412	ERJ3GEYJ122	M 1.2KOHM,J,1/16W	1	
R2413	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2414,15	ERJ3GEYJ122	M 1.2KOHM,J,1/16W	2	
R2416	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2417	ERJ3GEYJ122	M 1.2KOHM,J,1/16W	1	
R2418,19	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R2420	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R2421,22	ERJ3GEYJ273	M 27KOHM,J,1/16W	2	
R2423	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2424,25	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R2427	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R2516	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R2517	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R2520	ERJ3GEYJ224	M 22KOHM,J,1/16W	1	
R2524	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R2525	ERJ3EKF9100	M 910 OHM, 1/16W	1	
R2530	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R2531	ERJ3EKF2700	M 270 OHM, 1/16W	1	
R2542	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R2556,57	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R2558	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3001	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3002	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3003	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R3004	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R3007,08	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R3023-25	ERJ3GEYJ101	M 100 OHM,J,1/16W	3	
R3026-29	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
R3030-33	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R3034-36	ERJ3GEYJ331	M 330 OHM,J,1/16W	3	
R3037,38	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R3039-41	ERJ3GEYJ331	M 330 OHM,J,1/16W	3	
R3042,43	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R3044-47	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
R3048	ERJ3GEYJ334	M 330KOHM,J,1/16W	1	
R3049	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3050	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R3051	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R3053,54	ERJ3GEYJ560	M 56 OHM,J,1/16W	2	
R3057,58	ERJ3GEYJ560	M 56 OHM,J,1/16W	2	
R3059	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R3060	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3061	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3062	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3063	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R3064-69	ERJ6GEYJ560	M 56 OHM,J,1/10W	6	
R3070-75	ERJ6ENF75R0	M 75 OHM, 1/10W	6	
R3076-81	ERJ6GEYJ560	M 56 OHM,J,1/10W	6	
R3082	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R3083-87	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R3088-93	ERJ6ENF75R0	M 75 OHM, 1/10W	6	
R3094	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3095,96	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R3101-06	ERJ6ENF1800	M 180 OHM, 1/10W	6	
R3107,08	ERJ6GEYJ560	M 56 OHM,J,1/10W	2	
R3110	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
R3111	ERJ6ENF1501	M 1.5KOHM, 1/10W	1	
R3116	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3117	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3118	ERJ6ENF8200	M 820 OHM, 1/10W	1	
R3125	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R3126	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3134	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R3140,41	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3143,44	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R3150,51	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R3160,61	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R3163	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3188-90	ERJ6ENF39R0	M 39 OHM, 1/10W	3	
R3195,96	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R3197,98	ERJ3GEYJ123	M 12KOHM,J,1/16W	2	
R3210,11	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3212-15	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	4	
R3216-19	ERJ6GEYJ3R3	M 3.3KOHM,J,1/10W	4	
R3230,31	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3400	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R3508,09	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
R3510,11	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3529,30	ERJ6GEYJ184	M 180KOHM,J,1/10W	2	
R3547,48	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3585,86	ERJ6GEYJ560	M 56 OHM,J,1/10W	2	
R3589	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R3590	ERJ6GEYJ560	M 56 OHM,J,1/10W	1	
R3591-93	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
R3653	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R3654	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3655	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R3656	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3663,64	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R3668	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3672	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3751	ERJ6GEYF822	M 8.2KOHM,F,1/10W	1	
R3752	ERJ6GEYF222	M 2.2KOHM,F,1/10W	1	
R3753	ERJ6GEYF302	M 3.0KOHM,F,1/10W	1	PAVCA
R3754	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3756	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3758	ERJ6GEYF472	M 4.7KOHM,F,1/10W	1	
R3759-64	ERJ6GEY0R00	M 0 OHM, 1/10W	6	
R3766,67	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R3776,77	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3778	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R3790,91	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R4001-03	D1HG1008A002	NETWORK RESISTER	3	
R4004	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R4005	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4006	ERJ3EKF6801	M 6.8KOHM, 1/16W	1	
R4007	ERJ6ENF39R0	M 39 OHM, 1/10W	1	
R4008	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4009	ERJ6ENF39R0	M 39 OHM, 1/10W	1	
R4010	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4011	ERJ6ENF39R0	M 39 OHM, 1/10W	1	
R4012-14	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4016-19	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R4020	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R4021	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R4023	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R4024	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4025	ERJ6ENF1502	M 15KOHM, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4026	ERJ6ENF5102	M 51KOHM, 1/10W	1	
R4027	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R4028	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4035-38	ERJ3GEYJ101	M 100 OHM,J,1/16W	4	
R4041,42	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4139	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4142	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R4144	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R4148	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R4171	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R4201	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R4211-20	ERJ3GEYJ101	M 100 OHM,J,1/16W	10	
R4221,22	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R4224	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4226	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4228	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4240,41	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4242,43	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4244	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4245	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4249	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4250-52	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4256,57	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4260,61	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4263,64	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4271-73	D1HG8208A002	NETWORK RESISTER	3	
R4274,75	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R4276	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4277-79	D1HG1218A002	NETWORK RESISTER	3	
R4280,81	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R4282	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4312,13	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4314	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4316	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4318,19	ERJ3GEYJ223	M 22KOHM,J,1/16W	2	
R4321	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R4324	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4325-27	EXB38VR000	RESISTOR ARRAY	3	
R4502	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4503	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4506,07	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4509,10	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R4513	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4514-16	ERJ3GEYJ470	M 47 OHM,J,1/16W	3	
R4518	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4522,23	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4525,26	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4528-31	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R4533	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4536,37	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4539-41	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4544-47	ERJ3GEY0R00	M 0 OHM, 1/16W	4	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4549	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4554	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R4555-58	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R4559,60	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R4564-67	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R4568,69	D1HG1038A002	NETWORK RESISTER	2	
R4570-72	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4573	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4574	EXB2HV680J	RESISTOR ARRAY	1	
R4575,76	ERJ3GEYJ680	M 68 OHM,J,1/16W	2	
R4577	EXB2HV680J	RESISTOR ARRAY	1	
R4578,79	ERJ6ENF1001	M 1KOHM, 1/10W	2	
R4580	ERJ6ENF1101	M 1.1KOHM, 1/10W	1	
R4581	ERJ6ENF3161	M3.16KOHM, 1/10W	1	
R4582,83	ERJ3GEYJ680	M 68 OHM,J,1/16W	2	
R4584	EXB2HV680J	RESISTOR ARRAY	1	
R4585,86	ERJ3GEYJ680	M 68 OHM,J,1/16W	2	
R4587-89	D1HG33080001	NETWORK RESISTER	3	
R4590,91	ERJ3GEYJ680	M 68 OHM,J,1/16W	2	
R4595	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
R4596	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4618-21	D1HG33080001	NETWORK RESISTER	4	
R4622	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4626,27	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4631	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4640	ERJ3GEYJ121	M 120 OHM,J,1/16W	1	
R4657,58	ERJ6ENF1001	M 1KOHM, 1/10W	2	
R4671	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4672	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4673	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4674	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4676	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4701	EXB38V103J	RESISTOR ARRAY	1	
R4702	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4703	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4704	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4706	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R4707	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4708	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4709	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4710,11	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4712,13	D1HG1008A002	NETWORK RESISTER	2	
R4715	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4716	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4717	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4718,19	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4722	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4723	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4724	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4726	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4727	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4728	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4729,30	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R4732	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4734	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4735	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4737	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4738	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4740,41	D1HG1008A002	NETWORK RESISTER	2	
R4742,43	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4745	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4746	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4747	EXB38VR000	RESISTOR ARRAY	1	
R4748-52	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R4753	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4754	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R4755	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4756	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R4757	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4758	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4759	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4760	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4761-63	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4764,65	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R4766,67	EXB2HV470JV	RESISTOR ARRAY	2	
R4768	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R4769	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4770	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R4771	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4772	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4773	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4774	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4775	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4777	ERJ3GEYJ393	M 39KOHM,J,1/16W	1	
R4778	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4779	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4780,81	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R4783	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4786	EXB38V103J	RESISTOR ARRAY	1	
R4788	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4790,91	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R4792	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4793	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R4795	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4796	ERJ3GEYJ182	M 1.8KOHM,J,1/16W	1	
R4804	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R4806	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4808	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R4812,13	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4814	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4815	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4817	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4818,19	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R4820	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4821	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4822,23	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4824	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4825	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4826	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4827	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4828	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4829	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4830	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4831	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4832	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4833	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4834	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4835	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4836	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4837	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4838	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4839	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4840	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4841,4	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R4843	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R4844	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4845	ERJ3GEYJ392	M 3.9KOHM,J,1/16W	1	
R4846	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R4847,4	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R4849	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R4850	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4851-53	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R4855	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4858	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4859	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R4860	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4863	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4864	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R4865,6	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4868	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R4869	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4870	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4872	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4873,7	ERJ3GEYJ223	M 22KOHM,J,1/16W	2	
R4876	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4877	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4879	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4880	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4881	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4883	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R4884	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4886	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R4887	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4888	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4891	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4892	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4893	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4894,9	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R4900	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4902	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4903	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4904	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4906	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R4908	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R4909	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R4910	ERJ3EKF6202	M 62KOHM, 1/16W	1	
R4911-21	ERJ3GEYJ101	M 100 OHM,J,1/16W	11	
R4922,2	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4924	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4925-27	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4930	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4931	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R4932	ERJ3EKF3902	M 39KOHM, 1/16W	1	
R4933	ERJ3EKF3901	M 3.9KOHM, 1/16W	1	
R4934	ERJ3EKF3002	M 30KOHM, 1/16W	1	
R4935	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4936	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4938	ERJ3EKF1302	M 23KOHM, 1/16W	1	
R4939	ERJ3EKF2402	M 24KOHM, 1/16W	1	
R4940	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4941	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4942,4	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4944	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R4947	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4950	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4951	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R4952	ERJ3GEY0R00	M 0 OHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4953	ERJ3EKF4702	M 47KOHM, 1/16W	1	
R4954	ERJ3EKF7501	M 7.5KOHM, 1/16W	1	
R4955	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4957	ERJ3EKF3602	M 36KOHM, 1/16W	1	
R4958	ERJ3EKF8202	M 82KOHM, 1/16W	1	
R4959	ERJ3EKF2202	M 22KOHM, 1/16W	1	
R4960	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4961,6	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R4963	ERJ3EKF4702	M 47KOHM, 1/16W	1	
R4964	ERJ3EKF7501	M 7.5KOHM, 1/16W	1	
R4965	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4966,6	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4969	ERJ3EKF3602	M 36KOHM, 1/16W	1	
R4970	ERJ3EKF6802	M 68KOHM, 1/16W	1	
R4973	ERJ3EKF2402	M 24KOHM, 1/16W	1	
R4974	ERJ3EKF2401	M 2.4KOHM, 1/16W	1	
R4975	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R4981	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R4986	ERJ3GEYJ183	M 18KOHM,J,1/16W	1	
R4987	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R4991,9	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4994,9	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R6001-06	ERJ14YJ150U	M 15 OHM, J,1/4W	6	
R6020	ERG3FJS101D	M 100 OHM, J, 3W	1	
R6021	ERJ14YJ150U	M 15 OHM, J,1/4W	1	
R6022	ERG3FJS101D	M 100 OHM, J, 3W	1	
R6023-27	ERJ14YJ150U	M 15 OHM, J,1/4W	5	
R6031,3	ERJ6ENF8202	M 82KOHM, 1/10W	2	
R6033	ERJ6ENF5602	M 56KOHM, 1/10W	1	
R6034	ERJ6ENF2702	M 27KOHM, 1/10W	1	
R6041-44	ERJ14YJ100	M 10 OHM, J,1/4W	4	
R6051-54	ERJ14YJ100	M 10 OHM, J,1/4W	4	
R6061,6	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R6101-08	ERJ6GEYJ101	M 100 OHM,J,1/10W	8	
R6109	D0GD100JA036	M 10 OHM,J,0.25W	1	
R6110	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6111,1	D0GD470JA036	M 47 OHM,J,0.25W	2	
R6113	ERJ14YJ224	M 220KOHM, J,1/4W	1	
R6114	D0GD470JA036	M 47 OHM,J,0.25W	1	
R6116	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6131,3	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6133,3	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
R6135,3	D0GD100JA036	M 10 OHM,J,0.25W	2	
R6141,4	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6146,4	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6151,5	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6153,5	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
R6155,5	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R6157-60	D0GF1R0JA047	M 1.0 OHM,J, 0.33W	4	
R6171	D0GD100JA036	M 10 OHM,J,0.25W	1	
R6172,7	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6181	D0GD100JA036	M 10 OHM,J,0.25W	1	
R6182,8	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6191-94	ERJ6GEYJ101	M 100 OHM,J,1/10W	4	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6195	D0GD104JA036	M 100KOHM,J,0.25W	1	
R6196	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6213	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6214	D0GD151JA036	M 150 OHM,J,0.25W	1	
R6222	ERG1FJS103D	M 10KOHM, J, 1W	1	
R6223	ERG2FJS123D	M 12KOHM, J, 2W	1	
R6225	D0GD203JA036	M 20KOHM,J,0.25W	1	
R6226,27	ERJ6GEYJ163	M 16KOHM,J,1/10W	2	
R6228	ERJ6GEYJ562	M 5.6KOHM,J,1/10W	1	
R6229	ERJ6GEYJ163	M 16KOHM,J,1/10W	1	
R6231	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6232	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6241	EXB38V470J	RESISTOR ARRAY	1	
R6242	EXB38V472J	RESISTOR ARRAY	1	
R6243	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6244	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6245	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6246	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6251	D0GD103JA036	M 10KOHM,J,0.25W	1	
R6252,53	ERJ6ENF3902	M 39KOHM, 1/10W	2	
R6254	ERJ6ENF8201	M 8.2KOHM, 1/10W	1	
R6255	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6256	ERJ6ENF1501	M 1.5KOHM, 1/10W	1	
R6257	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6258	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6261	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6401-06	ERJ14YJ150U	M 15 OHM, J,1/4W	6	
R6421-26	ERJ14YJ150U	M 15 OHM, J,1/4W	6	
R6441-44	ERJ14YJ100	M 10 OHM, J,1/4W	4	
R6451-54	ERJ14YJ100	M 10 OHM, J,1/4W	4	
R6465	ERJ6ENF2702	M 27KOHM, 1/10W	1	
R6466	ERJ6ENF5602	M 56KOHM, 1/10W	1	
R6467,68	ERJ6ENF8202	M 82KOHM, 1/10W	2	
R6471	ERJ6GEYJ392	M 3.9KOHM,J,1/10W	1	
R6472	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6473	ERJ6GEYJ561	M 560 OHM,J,1/10W	1	
R6474	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6475,76	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
R6477	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6478	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6479	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6501,02	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6503	D0GD100JA036	M 10 OHM,J,0.25W	1	
R6504,05	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
R6506	D0GD100JA036	M 10 OHM,J,0.25W	1	
R6507-09	D0GF1R0JA047	M 1.0 OHM,J, 0.33W	3	
R6511,12	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6516,17	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6521,22	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6523,24	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
R6525,26	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R6531	D0GD100JA036	M 10 OHM,J,0.25W	1	
R6532,33	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6551	D0GD100JA036	M 10 OHM,J,0.25W	1	
R6552,53	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6561-64	EXB38V470J	RESISTOR ARRAY	4	
R6565-68	EXB38V472J	RESISTOR ARRAY	4	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6581	D0GD103JA036	M 10KOHM,J,0.25W	1	
R6582,83	ERJ6ENF3902	M 39KOHM, 1/10W	2	
R6584	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R6585	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6586	ERJ6ENF1801	M 1.8KOHM, 1/10W	1	
R6587	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6588	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6590	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6591	EXB38V472J	RESISTOR ARRAY	1	
R6592	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6603	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6604	D0GD151JA036	M 150 OHM,J,0.25W	1	
R6605	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6606	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6607	ERJ6ENF5601	M 5.6KOHM, 1/10W	1	
R6608,09	D0GF102JA047	M 1.0 KOHM,J,0.33W	2	
R6610	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6611	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R6612	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6613	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R6614,15	D0GF243JA047	M 24 KOHM,J,0.33W	2	
R6616	ERJ6ENF1502	M 15KOHM, 1/10W	1	
R6617	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R6618	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R6619	ERJ6ENF1501	M 1.5KOHM, 1/10W	1	
R6620	D0D28R2JA021	M 8.2 OHM,J,5W	1	
R6621,22	ERJ6GEYJ221	M 220 OHM,J,1/10W	2	
R6641,42	ERJ6GEYJ100	M 10 OHM,J,1/10W	2	
R6644,45	ERJ6GEYJ100	M 10 OHM,J,1/10W	2	
R6647,48	ERJ6GEYJ100	M 10 OHM,J,1/10W	2	
R6658	D0D1101JA009	M 100 OHM,J,1W	1	
R6659,60	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R6661	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6662	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R6663	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6664	D0GF222JA047	M 2.2 KOHM,J,0.33W	1	
R6665	ERJ14YJ470	M 47 OHM,J, 1/2W	1	
R6666	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6667,68	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
R6671	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6672	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6673,74	D0GD5R6JA059	M 5.6 OHM,J,0.25W	2	
R6682	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6683	D0GD151JA036	M 150 OHM,J,0.25W	1	
R6684	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6685	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R6686	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6687	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6688	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6689	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6690	ERJ6GEYJ151	M 150 OHM,J,1/10W	1	
R6691	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6696,97	D0D32R2JA020	M 2.2 OHM,J,5W	2	
R6700-08	ERJ6GEYJ471	M 470 OHM,J,1/10W	9	
R6710-18	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	9	
R6721,22	EXB38V220J	RESISTOR ARRAY	2	
R6723	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6724	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6742	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6743	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6744	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6745	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6746,47	D0GD103JA036	M 10KOHM,J,0.25W	2	
R6755	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6756-58	D0GD101JA059	M 100 OHM,J,0.25W	3	
R6759	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6760	ERJ6GEYJ122	M 1.2KOHM,J,1/10W	1	
R6761	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6762	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6775,76	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6777	D0GD151JA036	M 150 OHM,J,0.25W	1	
R6781	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6782	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6791	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6792	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6793	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6801,02	ERX1FJSR22D	M0.22 OHM, J, 1W	2	
R6806	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6807	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R6808	ERG3FJS560D	M 56 OHM, J, 3W	1	
R6809	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6810,11	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R6812	ERJ6ENF2403	M 240KOHM, 1/10W	1	
R6813	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R6814	ERJ6ENF5601	M 5.6KOHM, 1/10W	1	
R6815	ERG2FJS183D	M 18KOHM, J, 2W	1	
R6816	ERJ6ENF1582	M15.8KOHM, 1/10W	1	
R6817	ERJ6ENF2701	M 2.7KOHM, 1/10W	1	
R6821	ERG2FJS221D	M 220 OHM, J, 2W	1	
R6822	ERJ12YJ104U	M 100KOHM, 1/2W	1	
R6823	ERG1FJS104D	M 100KOHM, J, 1W	1	
R6824	ERJ6GEYJ562	M 5.6KOHM,J,1/10W	1	
R6825,26	ERJ6ENF2703	M 270KOHM, 1/10W	2	
R6827	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6828	ERJ6ENF5231	M5.23KOHM, 1/10W	1	
R6829,30	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R6831	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R6833-35	ERJ6ENF5602	M 56KOHM, 1/10W	3	
R6836	ERJ6ENF6802	M 68KOHM, 1/10W	1	
R6837	ERJ6ENF4702	M 47KOHM, 1/10W	1	
R6839	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6841	ERJ12YJ153U	M 15KOHM, 1/2W	1	
R6842	ERJ14YJ433U	M 43KOHM, 1/2W	1	
R6843	ERJ6GEYJ623	M 62KOHM,J,1/10W	1	
R6844	ERG2FJS101D	M 100 OHM, J, 2W	1	
R6845	ERJ6GEYJ623	M 62KOHM,J,1/10W	1	
R6846,47	ERJ6GEYJ563	M 56KOHM,J,1/10W	2	
R6848	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6849,50	ERJ6ENF6802	M 68KOHM, 1/10W	2	
R6851	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6852	ERJ6ENF2491	M2.49KOHM, 1/10W	1	
R6853	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6860	D0D28R2JA021	M 8.2 OHM,J,5W	1	
R6861	ERJ6ENF3902	M 39KOHM, 1/10W	1	
R6862,63	ERJ6ENF4702	M 47KOHM, 1/10W	2	
R6864	ERJ6ENF9101	M 9.1KOHM, 1/10W	1	
R6865,66	ERJ6ENF2201	M 2.2KOHM, 1/10W	2	
R6867	ERJ6GEYJ392	M 3.9KOHM,J,1/10W	1	
R6868	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R6869	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6871-73	ERJ6ENF3902	M 39KOHM, 1/10W	3	
R6874	ERJ6ENF8201	M 8.2KOHM, 1/10W	1	
R6875	ERJ6ENF3301	M 3.3KOHM, 1/10W	1	
R6876	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6877	ERJ6GEYJ392	M 3.9KOHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6878	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R6879	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6886-88	ERJ6GEYJ224	M 220KOHM,J,1/10W	3	
R6901	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6902-04	ERJ3GEYJ220	M 22 OHM,J,1/16W	3	
R6905	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6909	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6913	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6917	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6924	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6931-34	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R6935,36	ERJ8GEYJ224	M 220KOHM, J,1/8W	2	
R6951	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6952-54	ERJ3GEYJ220	M 22 OHM,J,1/16W	3	
R6955	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6959	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6963	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6967	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6971	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6981-84	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R6985,86	ERJ8GEYJ224	M 220KOHM, J,1/8W	2	
R7112	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7113,14	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R7115	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R7116	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R7118,19	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R7120	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7122-25	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7126	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R7127,28	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R7132-37	EXB38V470J	RESISTOR ARRAY	6	
R7139,40	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R7142-45	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7146	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7149	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7151-54	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7155	EXB38V102J	RESISTOR ARRAY	1	
R7156	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7158,59	EXB38V470J	RESISTOR ARRAY	2	
R7162-67	EXB38V102J	RESISTOR ARRAY	6	
R7169	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7171-74	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7175	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7177	EXB38V102J	RESISTOR ARRAY	1	
R7179,80	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7186,87	EXB38V470J	RESISTOR ARRAY	2	
R7201-07	EXB38V470J	RESISTOR ARRAY	7	
R7208-10	ERJ3GEYJ470	M 47 OHM,J,1/16W	3	
R7212-15	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7216	EXB38V470J	RESISTOR ARRAY	1	
R7217	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7219	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R7221	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7223-26	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R7227	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7229	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7231	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7232-35	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7236	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7237-42	EXB38V102J	RESISTOR ARRAY	6	
R7245	EXB38V102J	RESISTOR ARRAY	1	
R7246-49	ERJ3GEYJ220	M 22 OHM,J,1/16W	4	
R7250,51	EXB38V470J	RESISTOR ARRAY	2	
R7256,57	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7258	EXB38V102J	RESISTOR ARRAY	1	
R7260	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7262-65	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7266	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7269	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7270	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R7271	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R8001-04	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R8005	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R8009-12	ERJ3GEYJ271	M 270 OHM,J,1/16W	4	
R8017,18	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R8021	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R8025	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8026	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R8029	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R8031	ERJ6ENF2201	M 2.2KOHM, 1/10W	1	
R8033	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R8035	ERJ6ENF3300	M 330 OHM, 1/10W	1	
R8036	ERJ6ENF1500	M 150 OHM, 1/10W	1	
R8037	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
R8039	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
R8041	ERJ3GEYJ183	M 18KOHM,J,1/16W	1	
R8045	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R8047	ERJ3GEYJ271	M 270 OHM,J,1/16W	1	
R8048	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R8050	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R8051	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R8054	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8055,56	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R8057	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R8060	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8065	D0GB911JA002	M 910 OHM,J,1/16W	1	
R8067	D0GB911JA002	M 910 OHM,J,1/16W	1	
R8069	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R8072	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8089	ERJ3GEYJ181	M 180 OHM,J,1/16W	1	
R8093	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R8097,98	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R8100	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R8112	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8117-20	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R8121,22	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	2	
R8124-27	ERJ6GEYJ101	M 100 OHM,J,1/10W	4	
R8129	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R8180	ERJ8GEYJ820V		1	
R8181	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R8182	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R8183,84	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R8185,86	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8187,88	ERJ6GEYJ560	M 56 OHM,J,1/10W	2	
R8189,90	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R8200	ERJ3GEYJ563	M 56KOHM,J,1/16W	1	
R8201	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R8202	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R8203	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R8204	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R8205	ERJ3GEYJ753	M 75KOHM,J,1/16W	1	
R8206	ERJ3GEYJ393	M 39KOHM,J,1/16W	1	
R8207	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9060-67	ERJ3GEYJ101	M 100 OHM,J,1/16W	8	
R9070	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R9074	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9076	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9096	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9098	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9099	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9100,01	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9102	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9105	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9106	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9107	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R9108,09	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9110	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9111	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R9113	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9120	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9121	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9127	ERJ3GEYJ683	M 68KOHM,J,1/16W	1	
R9129	ERJ3GEYJ683	M 68KOHM,J,1/16W	1	
R9131-33	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	3	
R9134	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R9140	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9141-45	ERJ3GEYJ101	M 100 OHM,J,1/16W	5	
R9148	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9149	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9150,51	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9152,53	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R9154,55	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R9156-59	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
R9160,61	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9164-66	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9167,68	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R9169	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9170-72	ERJ3GEYJ393	M 39KOHM,J,1/16W	3	
R9173-75	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9177	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R9178	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9179	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9180	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9181-84	ERJ3GEYJ102	M 1KOHM,J,1/16W	4	
R9185,86	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9187,88	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R9189,90	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9192	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9193	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9194	ERJ3GEY0R00	M 0 OHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9196	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9199	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R9203	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9205	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9206,07	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R9215	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R9217-22	ERJ3GEYJ103	M 10KOHM,J,1/16W	6	
R9223	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9225	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9230	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9232	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9236	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9237	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9240	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9317	ERJ3GEYJ391	M 390 OHM,J,1/16W	1	
R9348	DLHG8208A002	NETWORK RESISTER	1	
R9349	EXB38V820J	RESISTOR ARRAY	1	
R9350,51	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9352	EXB38V820J	RESISTOR ARRAY	1	
R9353,54	DLHG8208A002	NETWORK RESISTER	2	
R9355,56	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R9357-59	DLHG8208A002	NETWORK RESISTER	3	
R9360	EXB38V820J	RESISTOR ARRAY	1	
R9361,62	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9363	EXB2HV470JV	RESISTOR ARRAY	1	
R9366	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9367	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9368	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9369	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9370	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9371	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9379	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9380	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9382	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9390	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9391	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9394	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9395	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9501	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9503	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R9506	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9507	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9511-13	ERJ3GEYJ470	M 47 OHM,J,1/16W	3	
R9514	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9516	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9518	ERJ3GEYJ561	M 560 OHM,J,1/16W	1	
R9523	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9525	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9526	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9527,28	EXB2HV272JV	RESISTOR ARRAY	2	
R9529,30	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9531-33	ERJ3GEYJ470	M 47 OHM,J,1/16W	3	
R9534	EXB38V470J	RESISTOR ARRAY	1	
R9535,36	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R9537	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9539	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9543,44	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9545	ERJ3GEYJ304V	M 300KOHM,J,1/16W	1	
R9548-50	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9552	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9555	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9800	ERJ3EKF1302	M 23KOHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9801	ERJ3EKF2402	M 24KOHM, 1/16W	1	
R9802	ERJ3EKF6202	M 62KOHM, 1/16W	1	
R9803	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9804	ERJ3EKF2402	M 24KOHM, 1/16W	1	
R9805	ERJ3EKF3002	M 30KOHM, 1/16W	1	
R9806	ERJ3EKF3902	M 39KOHM, 1/16W	1	
R9807	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9808	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9810	ERJ3EKF3001	M 3KOHM, 1/16W	1	
R9813	ERJ3EKF2401	M 2.4KOHM, 1/16W	1	
R9814	ERJ3EKF6802	M 68KOHM, 1/16W	1	
R9815	ERJ3EKF2202	M 22KOHM, 1/16W	1	
R9816	ERJ3EKF8202	M 82KOHM, 1/16W	1	
R9821	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9823-27	ERJ3GEYJ101	M 100 OHM,J,1/16W	5	
R9828	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9830,31	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9838,39	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R9840	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9841	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9842-44	ERJ3GEYJ101	M 100 OHM,J,1/16W	3	
R9845	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9846,47	EXB2HV272JV	RESISTOR ARRAY	2	
R9848,49	EXB2HV470JV	RESISTOR ARRAY	2	
R9850	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R9854	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9859	EXB38V101J	RESISTOR ARRAY	1	
R9861-63	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9868	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9869-71	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9872	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9878	ERJ3EKF3902	M 39KOHM, 1/16W	1	
R9879	ERJ3EKF2002	M 20KOHM, 1/16W	1	
R9880	ERJ3EKF3602	M 36KOHM, 1/16W	1	
R9883	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9884	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9891	ERJ3EKF4702	M 47KOHM, 1/16W	1	
R9892	ERJ3EKF1502	M 15KOHM, 1/16W	1	
R9893	ERJ3EKF3602	M 36KOHM, 1/16W	1	
R9896	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9897	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9903	EXB2HV470JV	RESISTOR ARRAY	1	
R9904	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R9905	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R9906	EXB38V470J	RESISTOR ARRAY	1	
R9907	ERJ3GEYJ151	M 150 OHM,J,1/16W	1	
R9917,18	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9919,20	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9922	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9929	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9936-39	ERJ3EKF1001	M 1KOHM, 1/16W	4	
R9940	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R9941,42	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R9943-51	EXB38V470J	RESISTOR ARRAY	9	
R9952-55	ERJ3GEYJ470	M 47 OHM,J,1/16W	4	
R9956	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
RL402,03	TSEH8011	RELAY	2	△
RM2501	PNA4701M05TV	REMOCO RECEIVER	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
RTL	TNPA3896AB	CIRCUIT BOARD J	1	PAVCA △
RTL	TNPA2842S	CIRCUIT BOARD HX	1	PAVCA △
RTL	TXNDA1ZKTU	CIRCUIT BOARD DA	1	PAVCA △
RTL	TXNPB1ZKTU	CIRCUIT BOARD PB	1	PAVCA △
RTL	TXNC11BJTUE	CIRCUIT BOARD C1	1	PAVCA △
RTL	TXNC21BJTUE	CIRCUIT BOARD C2	1	PAVCA △
RTL	TNPA3810AKS	CIRCUIT BOARD D	1	PAVCA △
RTL	TXN/P1ZKTU	CIRCUIT BOARD P	1	PAVCA △
RTL	TXNSC1BJTUE	CIRCUIT BOARD SC	1	PAVCA △
RTL	TXNSD1BJTUE	CIRCUIT BOARD SD	1	PAVCA △
RTL	TXNSS1BJTUE	CIRCUIT BOARD SS	1	PAVCA △
RTL	TXNSU1BJTUE	CIRCUIT BOARD SU	1	PAVCA △
RTL	TXNGK1ZQTU	CIRCUIT BOARD GK	1	PAVCA △
RTL	TXN/K1ZQTU	CIRCUIT BOARD K	1	PAVCA △
RTL	TXN/S1ZQTU	CIRCUIT BOARD S	1	PAVCA △
S1	K1KA03BA0061	3P CONNECTOR	1	
S401,02	J0LT00000009	SWITCH	2	△
SC2	K1KA02A00626	2P CONNECTOR	1	
SC20	K1KA20AA0008	20P CONNECTOR	1	
SC23	K1KA03AA0193	3P CONNECTOR	1	
SC30	K1KA08AA0192	8P CONNECTOR	1	
SC41,42	K1ML80B00001	80P CONNECTOR	2	
SC45,46	K1KA09A00239	9P CONNECTOR	2	
SCMM1	TMME260	CLAMPER	1	
SCMM3	TMME260	CLAMPER	1	
SD1-D4	K1MN96B00005	96P CONNECTOR	4	
SD46	K1KB09A00045	9P CONNECTOR	1	
SS11	K1KA02A00626	2P CONNECTOR	1	
SS12	K1KA10AA0194	10P CONNECTOR	1	
SS23	K1KA12AA0194	12P CONNECTOR	1	
SS34	K1KA03AA0193	3P CONNECTOR	1	
SS41-44	K1MN13B00020	13P CONNECTOR	4	
SU1-U4	K1MN96B00005	96P CONNECTOR	4	
SU45	K1KB09A00045	9P CONNECTOR	1	
SW2500	K0F162B00002	SWITCH	1	
SW3753-57	EVQ11G05R	SWITCH	5	
T401	G4D4A0000117	SWITCHING TRANSFORMER	1	
T402	G4D1A0000098	SWITCHING TRANSFORMER	1	△
T404	ETS42LA12GAD	SWITCHING TRANS	1	△
T407	ETQ11K5AZ	CHOKE TRANS	1	△
T410	ETS25AF115AH	SWITCHING TRANS	1	△
T601	G4D2A0000264	SWITCHING TRANS	1	
T6602	ETS25AZ139AD	SWITCHING TRANS	1	
VR6000	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
VR6600	EVMEASA00B13	CONTROL 1KOHMB 0.3W	1	
VR6602	EVMEASA00B53	CONTROL 5KOHMB 0.3W	1	
W9,10	J0JKB0000037	FLAT CORE	2	
X501	H2B400400021	CRYSTAL	1	
X2301	H0J184500026	CRYSTAL	1	PAVCA
X4501	H0J200500038	CRYSTAL	1	
X4701	H0J100500030	CRYSTAL	1	
X8181	H0J327200114	CRYSTAL	1	
X9000	H2D200500011	CRYSTAL	1	
X9200	H0J200500038	CRYSTAL	1	
Z1,Z2	K4ZZ01000206	TERMINAL	2	
Z420	TMM23417	CLAMPER	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Z450-53	EYF52BCY	FUSE HOLDER	4	
ZA3001-08	K4CD01000013	TERMINAL	8	
ZA4001,02	K4CD01000011	TERMINAL	2	
ZA6001,02	K4CD01000011	TERMINAL	2	
ZA6005	K4CD01000011	TERMINAL	1	
ZA6401-03	K4CD01000011	TERMINAL	3	
ZA7101-04	K4CD01000013	TERMINAL	4	
ZA7201-04	K4CD01000013	TERMINAL	4	
ZA9001	K4CD01000011	TERMINAL	1	
ZN401	ERZVGED621T2	VARISTOR	1	△
ZN402	D4EAD7510001	VARISTOR	1	△
ZN404	ERZVGAD681T2	VARISTOR	1	△
ZN406	ERZVA7D511	VARISTOR	1	△